

ELECTROMETER TUBE


Subminiature electrometer tetrode

QUICK REFERENCE DATA		
Filament voltage	V_f	1.25 V
Anode voltage	V_a	4.5 V
Grid No. 2 voltage	V_{g2}	-3.2 V
Anode current	I_a	20 μA
Grid No. 2 current	I_{g2}	$< 6 \times 10^{-15} A$

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

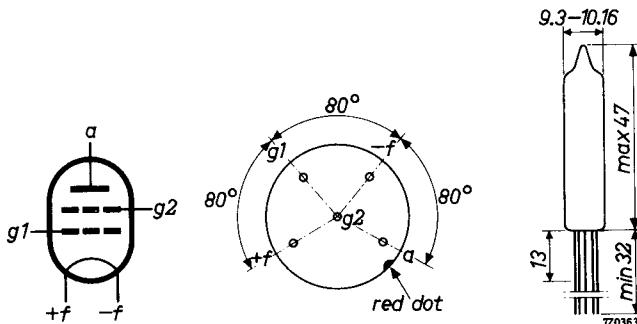

Directly soldered connections to the leads of this tube must be at least 13 mm from the seal and any bending of the leads must be at least 1.5 mm from the seal.

HEATING: Direct by D.C.

Filament voltage V_f 1.25 V

Filament current I_f 13 mA

CHARACTERISTICS AND RANGE VALUES

Anode voltage	V_a	4.5	V
Grid No.2 voltage	V_{g_2}	-3.2	-2 to -4.5 V
Grid No.1 voltage	V_{g_1}	3.0	2 to 4 V
Anode current	I_a	20	μA
Grid No.2 current	$-I_{g_2}$	2.5×10^{-15}	$< 6 \times 10^{-15}$ A
Transconductance	S_{Ag_2}	17	10 to 24 $\mu A/V$
Grid No.1 current ¹⁾	I_{g_1}	250	μA
Grid No.2 voltage at crossover point ²⁾	V_{g_2}	-1.75	V

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_a	max.	10	V
Cathode current	I_k	max.	300	μA
Filament voltage	V_f	max.	1.5	V
		min.	1.1	V



REMARKS

1. In order to avoid excessive drift of the characteristics the filament voltage must be applied before the anode and grid No.1 voltages.
2. To avoid contamination of the glass, the tube should not be removed from its protective envelope until it is mounted into the equipment.

¹⁾ Only valid in darkness

²⁾ "Crossover point" is the point at which the direction of I_{g_2} is reversed
At this point, V_{g_2} is at least 0.5 V less negative than its value at $I_a = 20 \mu A$

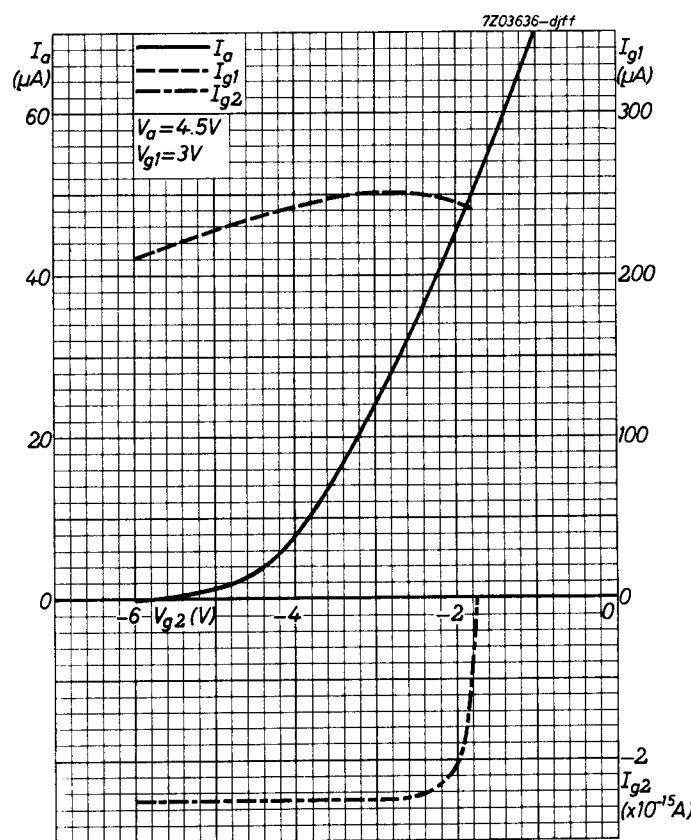

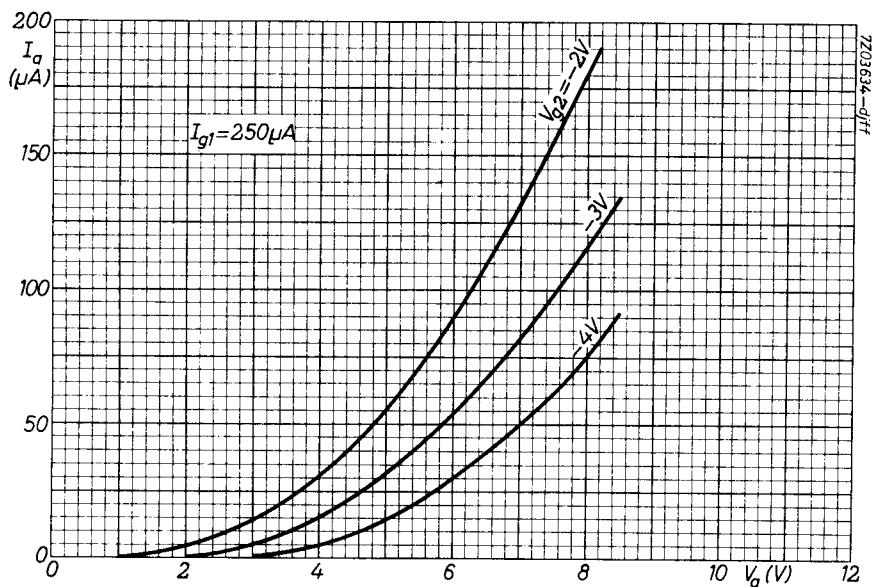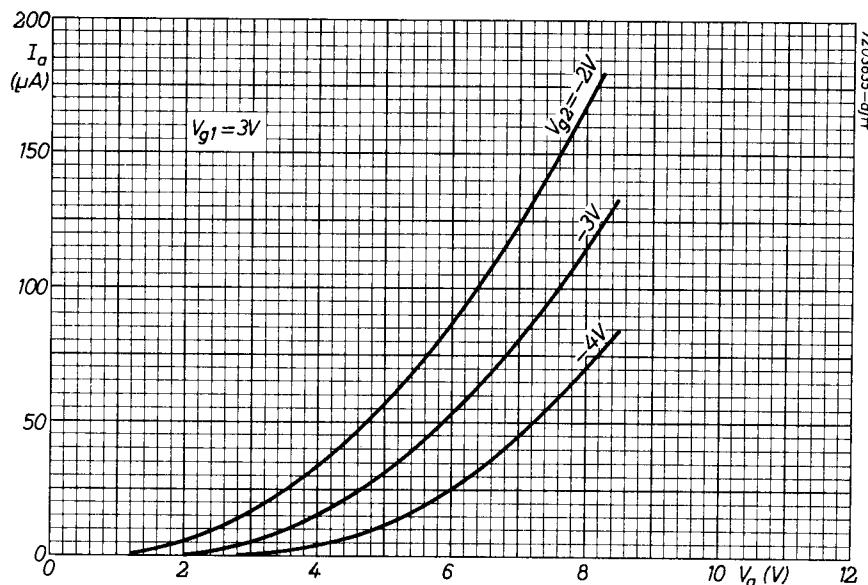

PHILIPS

Data handbook



**Electronic
components
and materials**

4066

page	sheet	date
1	1	1968.12
2	2	1968.12
3	3	1968.12
4	4	1968.12
5	FP	2001.05.19