

Beam Power Tube

NOVAR TYPE

For Horizontal-Deflection-Amplifier Service
in Low-B+, Black-and-White TV Receivers

ELECTRICAL

Heater Characteristics and Ratings

Current	0.450 ± 0.030	A
Voltage (AC or DC).	22.0	V
At heater amperes = 0.450		
Warm-up time (Average).	11	s
Maximum heater-cathode voltage:		
Heater negative with respect to cathode:		
Peak.	200	V
Heater positive with respect to cathode:		
Peak.	200	V
DC component.	100	V


Direct Interelectrode Capacitances^a

Grid No.1 to plate.	1.2	pF
Input: G ₁ to (K, G ₃ , G ₂ , H).	22.0	pF
Output: P to (K, G ₃ , G ₂ , H).	9.0	pF

MECHANICAL

Operating Position.	Any
Type of Cathode	Coated Unipotential
Maximum Overall Length.	3.550 in
Seated Length	2.910 to 3.170 in
Diameter.	1.438 to 1.562 in
Dimensional Outline	See <i>General Section</i>
Bulb.	T12
Cap	Skirted Miniature (JEDEC No. C1-2 or C1-3)
Base.	Large-Button Novar 9-Pin with Exhaust Tip (JEDEC No. E9-88)
Basing Designation for BOTTOM VIEW.	9QL

- Pin 1—Grid No.2
- Pin 2—Grid No.1
- Pin 3—Cathode
- Pin 4—Heater
- Pin 5—Heater
- Pin 6—Grid No.1
- Pin 7—Grid No.2
- Pin 8—Grid No.3
- Pin 9—Do Not Use
- Cap—Plate

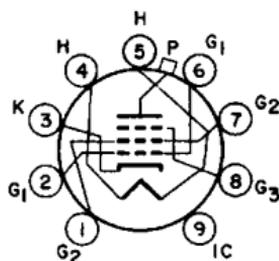

CHARACTERISTICS

Peak Positive-Pulse Plate Voltage ^b . . .	6500	-	-	V
Plate Voltage	-	50	130	V
Grid No.3	Connected to cathode at socket			
Grid-No.2 Voltage.	125	125	125	V
Grid-No.1 Voltage	-	0	-20	V
Plate Resistance (Approx.).	-	-	12000	Ω



22JF6

Transconductance	-	-	10000	μ mhos
Plate Current	-	525 ^c	80	mA
Grid-No.2 Current	-	32 ^c	2.5	mA
Grid-No.1 Voltage (Approx.)	-125	-	-40	V
For plate mA = 1				
Triode Amplification Factor				
(Triode connection: grid No.2 connected to plate at socket.)				
Plate volts = grid-No.2 volts =				
125; grid-No.1 volts = -20)	-	-	4.1	

HORIZONTAL-DEFLECTION AMPLIFIER

Maximum Ratings, Design-Maximum Values

For operation in a 525-line, 30-frame system

DC Plate Supply Voltage	770	V
Peak Positive-Pulse Plate Voltage ^d	6500	V
Peak Negative-Pulse Plate Voltage	1500	V
DC Grid-No.3 Voltage ^e	100	V
DC Grid-No.2 (Screen-Grid) Voltage.	220	V
Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage.	330	V
Cathode Current		
Peak	950	mA
Average	275	mA
Grid-No.2 Input	3.5	W
Plate Dissipation ^f	17	W
Bulb Temperature.	240	°C
At hottest point on bulb surface		

MAXIMUM CIRCUIT VALUES

Grid-No.1-Circuit Resistance

For grid-resistor-bias operation ^f	0.47	M Ω
For plate-pulsed operation.	10	M Ω
(Horizontal-deflection circuits only)		

^a Without external shield.

^b Under conditions shown in footnote^d.

^c This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.


^d This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

^e In horizontal-deflection-amplifier service, a positive voltage may be applied to grid No.3 to reduce interference from "snivets" which may occur in both vhf and uhf television receivers. A typical value for this voltage is 50 volts.


^f An adequate bias resistor or other means is required to protect the tube in the absence of excitation.



Average Characteristics

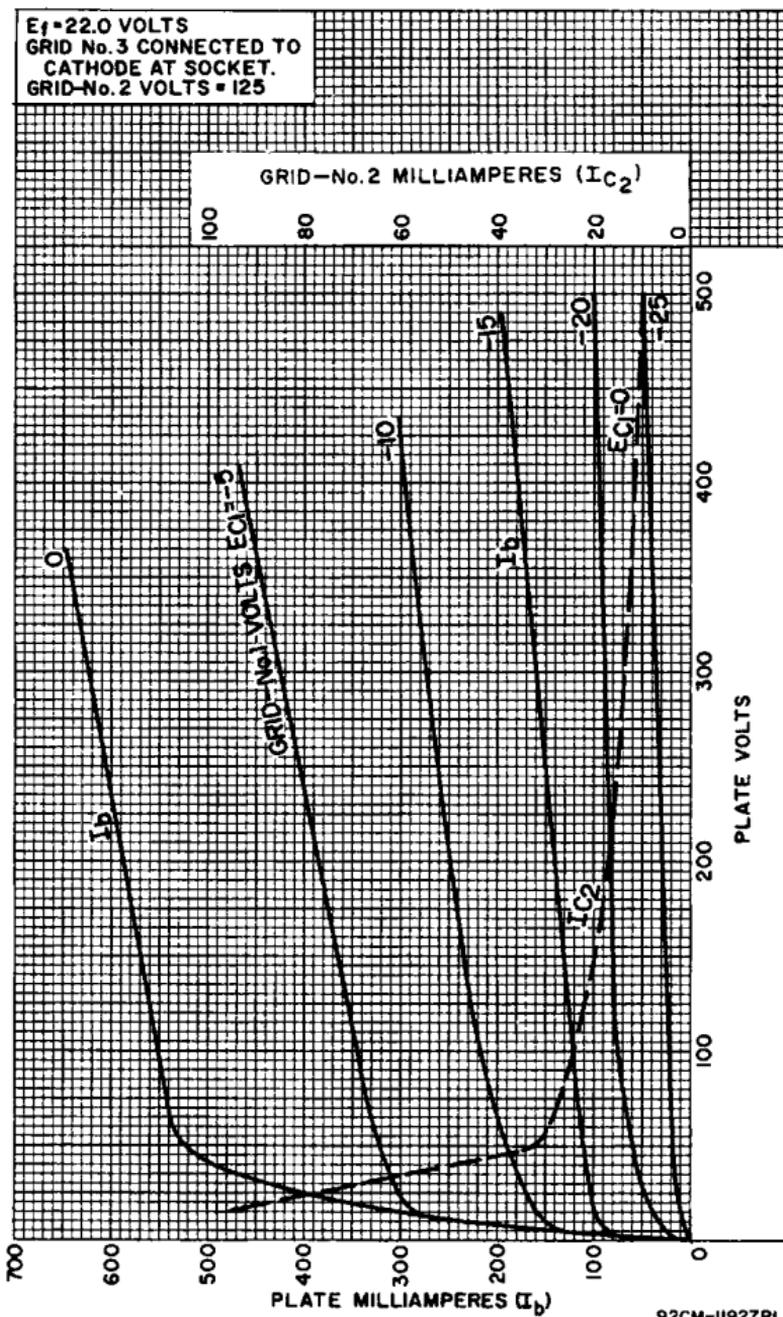

Average Characteristics

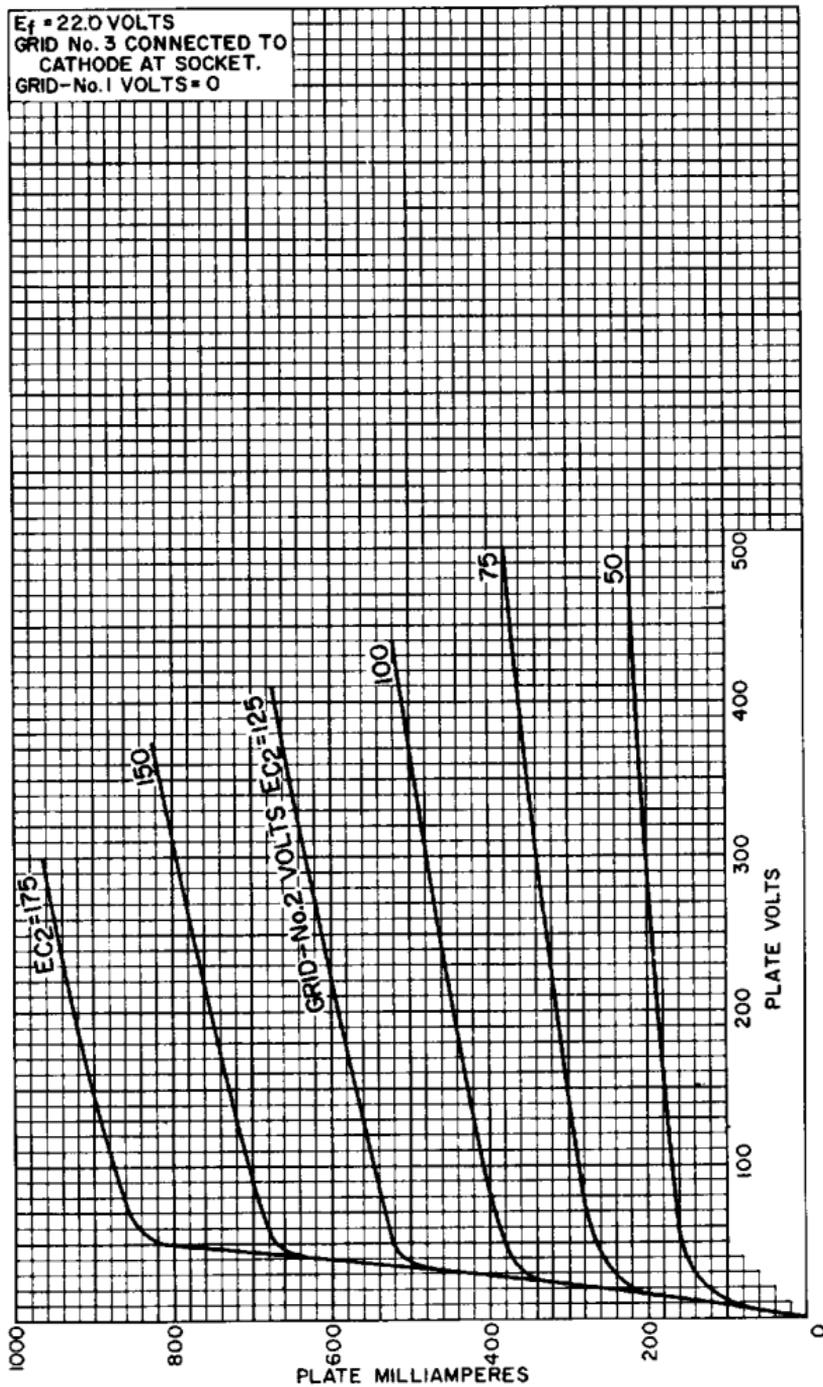

92CM-11923R2

