



845

845

MODULATOR, A-F POWER AMPLIFIER

Filament	Thoriated Tungsten		
Voltage	10	a-c or d-c volts	
Current	3.25	amp.	
Amplification Factor	5.3		
Direct Interelectrode Capacitances:			
Grid to Plate	13.5	μμf	
Grid to Filament	6	μμf	
Plate to Filament	6.5	μμf	
Maximum Overall Length		7-7/8"	
Maximum Diameter		2-5/16"	
Bulb		T-18	
Base	Jumbo 4-Large Pin		
RCA Socket	Type UT-541		

MAXIMUM RATINGS and TYPICAL OPERATING CONDITIONS

A-F POWER AMPLIFIER & MODULATOR - Class A

D-C Plate Voltage	1250	max.	volts
Plate Dissipation	100	max.	watts
Typical Operation:			
D-C Plate Voltage	750	1000	1250
D-C Grid Voltage*	-98	-145	-195
Peak A-F Grid Voltage	93	140	190
D-C Plate Current	95	90	80
Transconductance	3100	3100	3100
Plate Resistance	1700	1700	1700
Load Resistance	3400	6000	11000
U.P.O. (5% second harmonic)	15	24	30

NOTE: In cases where the input circuit to the 845 is resistance coupled, the resistance in the grid circuit should not exceed 0.5 megohm when cathode bias is used. Without cathode bias, the d-c resistance in the grid-coupling circuit should not exceed 0.1 megohm.

A-F POWER AMPLIFIER & MODULATOR - Class AB

D-C Plate Voltage	1250	max.	volts
D-C Grid Voltage	-400	max.	volts
D-C Plate Current	120	max.	ma.
Plate Input	150	max.	watts
Plate Dissipation	100	max.	watts
Typical Operation:			

Unless otherwise specified, values are for 2 tubes

D-C Plate Voltage	1000	1250	volts
D-C Grid Voltage*	-175	-225	volts
Peak A-F Grid-to-Grid Voltage	340	440	volts
Zero-Signal D-C Plate Current	40	40	ma.
Max.-Signal D-C Plate Current	230	240	ma.
Load Resistance (per tube)	1150	1650	ohms
Effective Load Res. (plate to plate)	4600	6600	ohms
Max.-Signal Power Output	75	115	approx.watts

* With a-c filament supply.

OUTLINE DIMENSIONS, TUBE SYMBOL, and SOCKET CONNECTIONS
for the 845 are the same as for the 211.


← Indicates a change.

845



845

AVERAGE PLATE CHARACTERISTICS

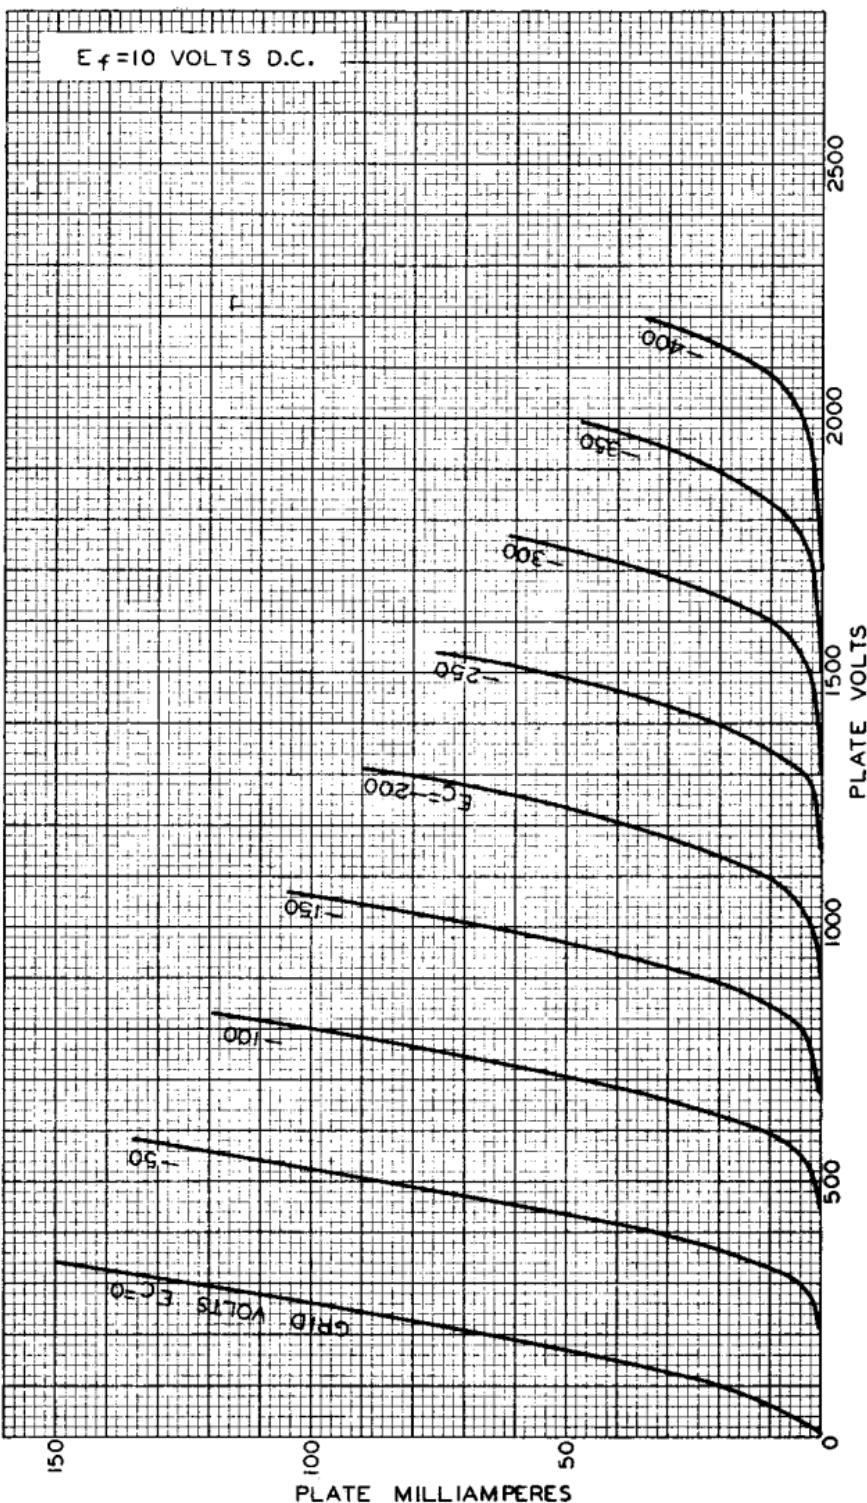

NOV. 1, 1933

RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-5310