



## DETECTOR, AMPLIFIER, OSCILLATOR

MIDGET TYPE

Heater "	Coated	Unipotential	Cathode				
Voltage		6.3		a-c	or	d-c	volts
Current		0.15					amp.
Direct Interelectrode Capacitances:							
Grid to Plate		1.4					μμf
Grid to Cathod	е	1.2					μμf
Plate to Catho		1.1					μμf
Maximum Overall Length			1–13/16"				
Maximum Seated H					19	9/16'	"
Length from Base		Bulb Top					
lexcluding tipl				1-	-3/1	l6" ±	3/32"
Maximum Diameter					3	/ 4"	

Bu 1b Base ▲

RCA Socket

Pin 1-Plate Pin 2 - Cathode Pin 3-Heater Pin 4 - Heater

Miniature Button 7-Pin Pin 5-Plate Pin 6 - Grid

Pin 7 - Cathode

Stock No. 9914

Anv

T-5-1/2

Mounting Position BOTTOM VIEW Maximum Ratings Are Design-Center Values

AMPLIFIER

Plate Voltage				250 ma:	x. volts
Plate Dissipat	Lion			1.6 ma:	x. watts
Typical Operat	ion and	Characteris	tics - Cla	ss A, Ampl	ifier:
Plate	90	135	180	250	vo1ts
Grid	-2.5	-3.75	-5	-7	vo1ts
Amp. Fact.	25	25	25	25	•
Plate Res.	14700	13200	12500	11400	ohms
Transcond.	1700	1900	2000	2200	µmhos
Plate Cur.	2.5	3.5	4.5	6.3	ma.

- The cathode of the 9002, when operated from a transformer, should preferably be connected to the heater circuit. In the case of d-c operation of the heater from a storage battery, the cathode circuit is tied in either directly or through bias resistors to the negative battery terminal. In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.
  - he center have in sockets designed for this base provides for the possibility that this tube type may be manufactured with the exhaust-tube tip at the base end. For this reason, it is recommended that in equipment employing this tube type, no material be permitted to obstruct the socket hale.


- Indicates a change.

<sup>\*</sup>Temporary minimum length = 1-1/16".

90%



## AVERAGE PLATE CHARACTERISTICS

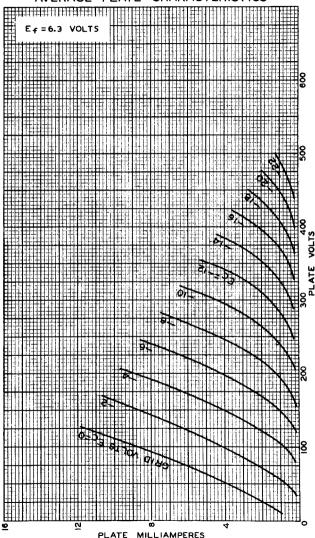

SEPT. 17, 1943

RCA VICTOR DIVISION
RADIO COMPORATION OF AMERICA HARRISON, NEW JERSEY

92C-6284