

Osram Valves

Made in England



Maximum Dimensions :

Overall length (including pins)
125 m/m.

Diameter of bulb 45 m/m.

TYPE MHD4

DOUBLE DIODE TRIODE

**With Indirectly Heated Cathode
(For operation from A.C. Mains).**

The OSRAM MHD4 is an Indirectly Heated Cathode Valve suitable for use on A.C. Mains, and combining double diode and triode electrode systems on a common cathode, and affording a convenient means to effect Automatic Volume Control.

The two diodes are enclosed within a metal shield joined to the cathode, providing an electrostatic screen.

In this valve rectification and amplification are separated, so that the former may be effected by means of a simple diode, and the rectified output applied to the grid of the triode element. The second diode can be employed in one of two ways :—

- (a) In conjunction with the first diode anode to provide full wave rectification of the applied signal.
- (b) In conjunction with a separate circuit to provide Automatic Volume Control.

CHARACTERISTICS.

Heater Volts	4.0
Heater Current	1.0 amp. approx.
Triode Characteristics :								
Anode Volts	250	200	Max. 100
Grid Volts	-3	-1
Anode Current average	3.8 ma	2.8 ma
Amplification Factor	$\{ 40$
Impedance	$\{ 18,200 \text{ ohms.}$
Mutual Conductance	$\{ 2.2 \text{ ma/volt}$ (measured at anode volts 100, grid volts 0)

Diode Characteristics.

With 0.5 megohm diode load resistance.


A.C. Volts R.M.S.	D.C. Volts Across Diode Load.
5	5
10	12
15	19
20	25
25	32

Interelectrode Capacities :

Triode Grid—Anode	3.76 micro-microfarad approx.
Triode Grid—Cathode	2.42	" "
Triode Anode—Cathode	4.64	" "
Each diode anode—Triode grid	0.14	" "
Diodes—all other electrodes	12.73	" "

(taken on metallised valve)

For prices see
pages 126-129.



View looking on underside of base.


BASE, 7-PIN.

- 1 : Diode
- 2 : Metallising
- 3 : Diode
- 4 : Heater
- 5 : Heater
- 6 : Cathode
- 7 : Anode


Top Cap : Grid

Type MHD4 has a carbonised bulb and can be supplied metallised if required.

TYPE MHD4

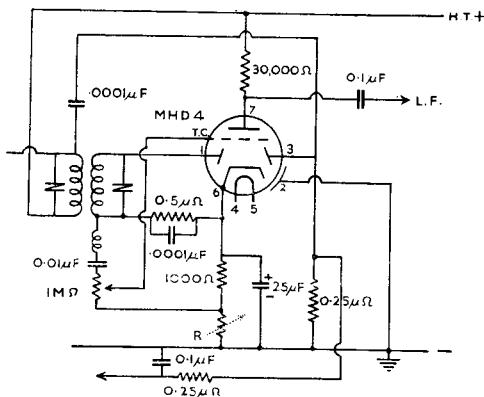

R=Resistance for delay voltage on diode. A suitable value is 5,000 ohms.

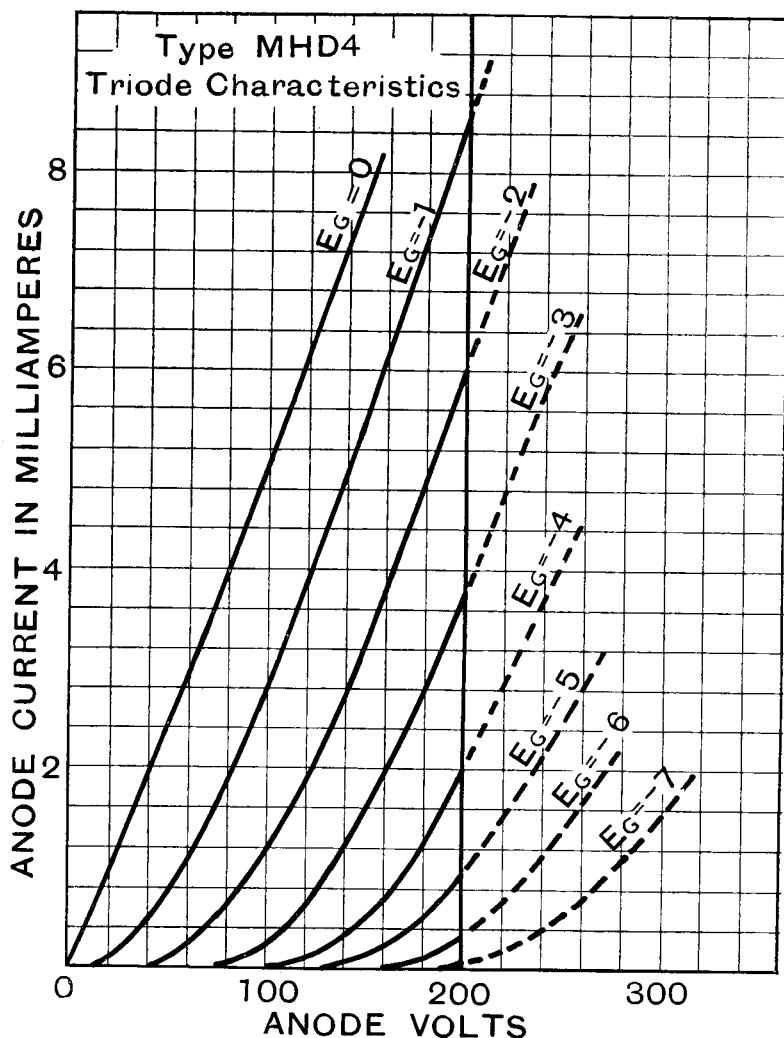

CHARACTERISTIC CURVES OF AVERAGE VALVE.