

KT90

The KT90 is a beam-power pentode primarily designed for use in audio frequency power amplifier applications. Anode dissipation rate is 50W, which provides for push-pull amplifiers utilization up to 110W output per pair, with 550V on the anode. Up to 160W per pair may be achieved with anode voltage of 750V and screen grid voltage of 600V.

The KT90 is recommended as a replacement for 6550, 6550A and KT88.

General Characteristics

Heater voltage	6.3 ±0.6 Volts AC or DC
Heater Current	1.6 Amperes

Grid1 to Anode capacitance	1.8 pF
Anode to all other electrodes capacitance	29 pF
Grid 1 to all other electrodes capacitance	10 pF

Mounting position	Any
Envelope	Glass
Base	Octal, 8 pins

Absolute Maximum Ratings	Pentode connection	Triode connection
V _a	750 V	600 V
V _{g2}	650 V	
-V _{g1}	200 V	200 V
P _a	50 W	50 W
P _{g2}	8 W	
P _a + P _{g2}	54 W	
I _k	230 mA	230 mA
V _{kf} (DC)	300 V	300 V


Average Characteristics, Pentode connection

V _a	250 V	400 V
V _{g2}	250 V	300 V
V _{g1}	-14 V	-27 V
I _a	145 mA	90 mA
I _{g2}	8 mA	4.7 mA
V _{g1} @ I _a = ~1 mA	-36 V	-42 V
S	14 mA/V	8.8 mA/V
R _i	11 kΩ	25 kΩ

Average Characteristics, Triode connection


V _a	250 V
V _{g1}	-14 V
I _a + I _{g2}	153 mA
S	15 mA/V
R _i	650 Ω
μ	9

KT90

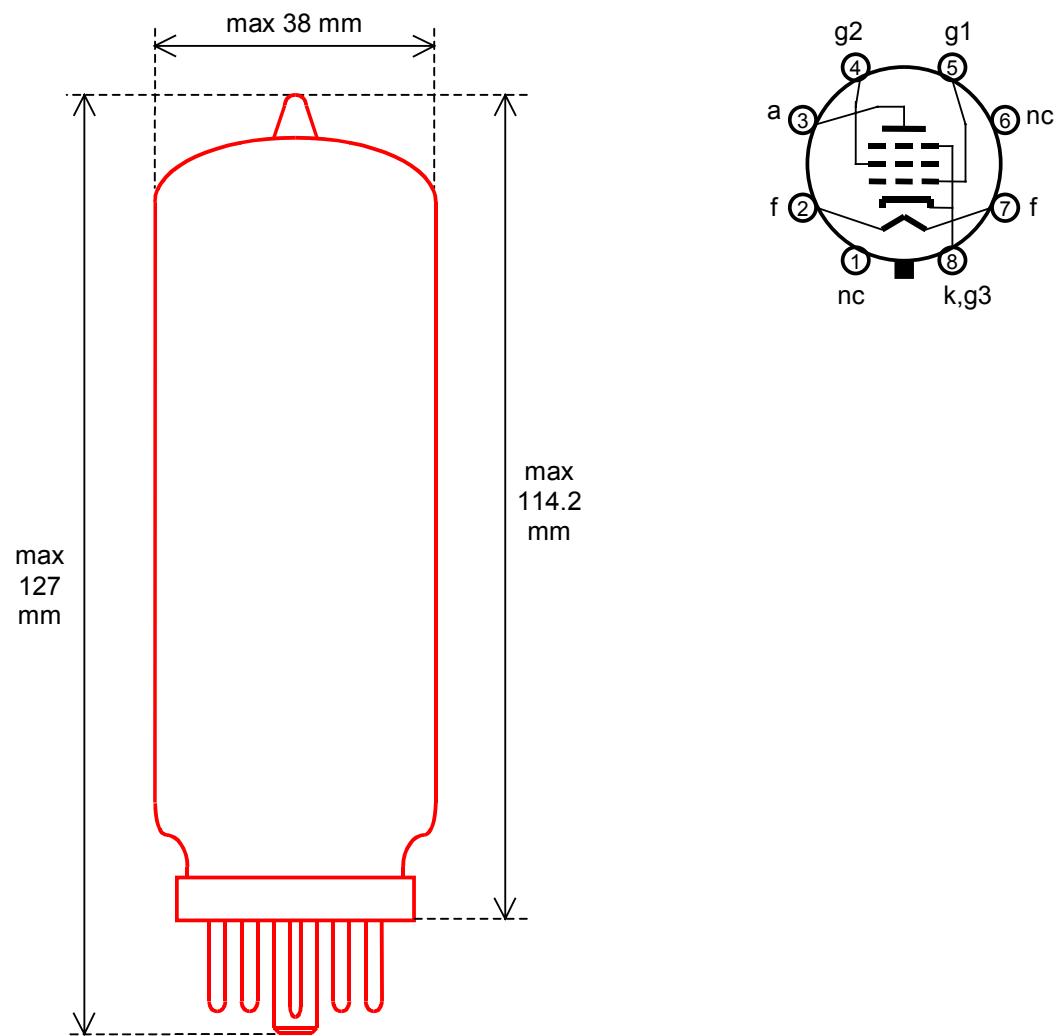


KT90

Average Plate Characteristics

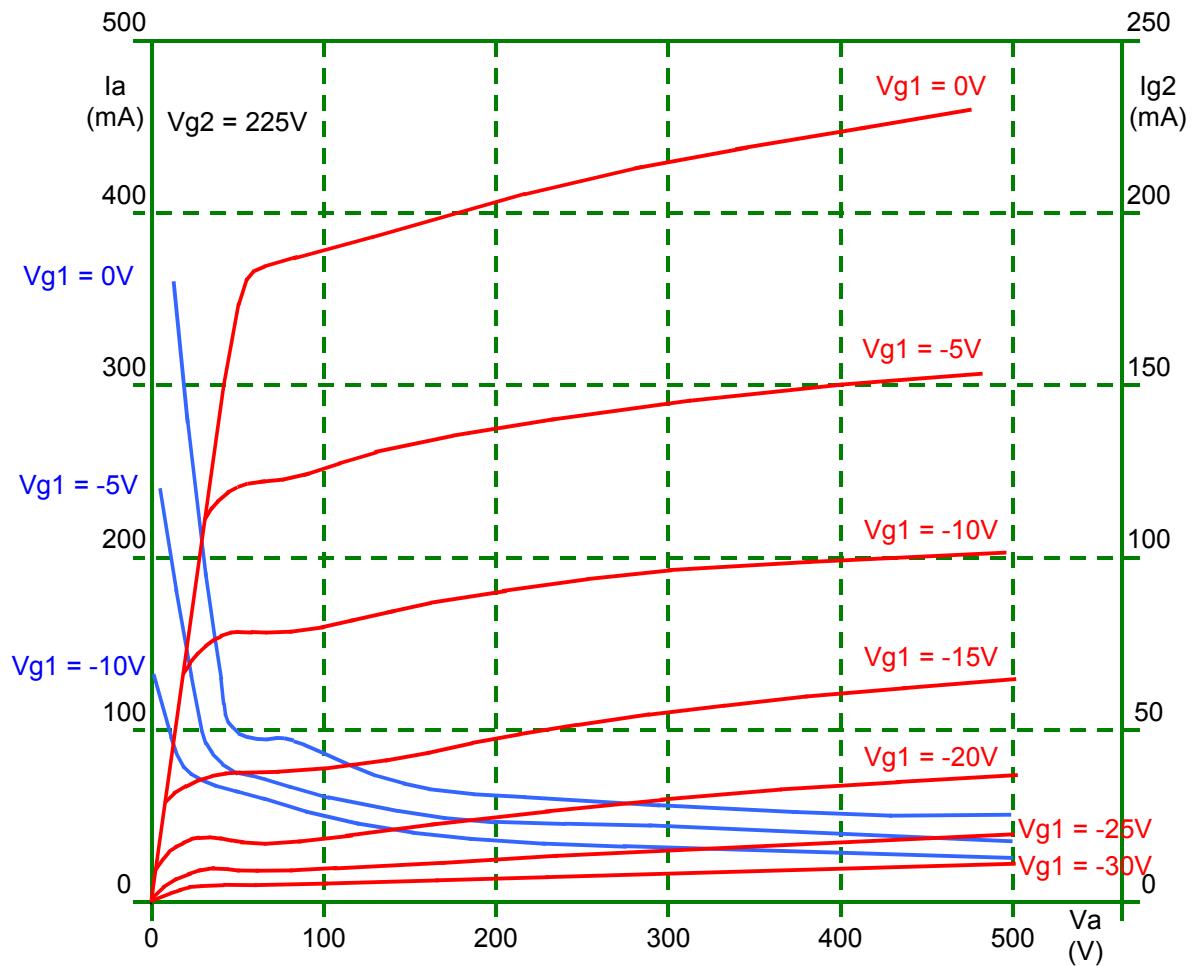

KT90

Average Plate Characteristics, Triode connection

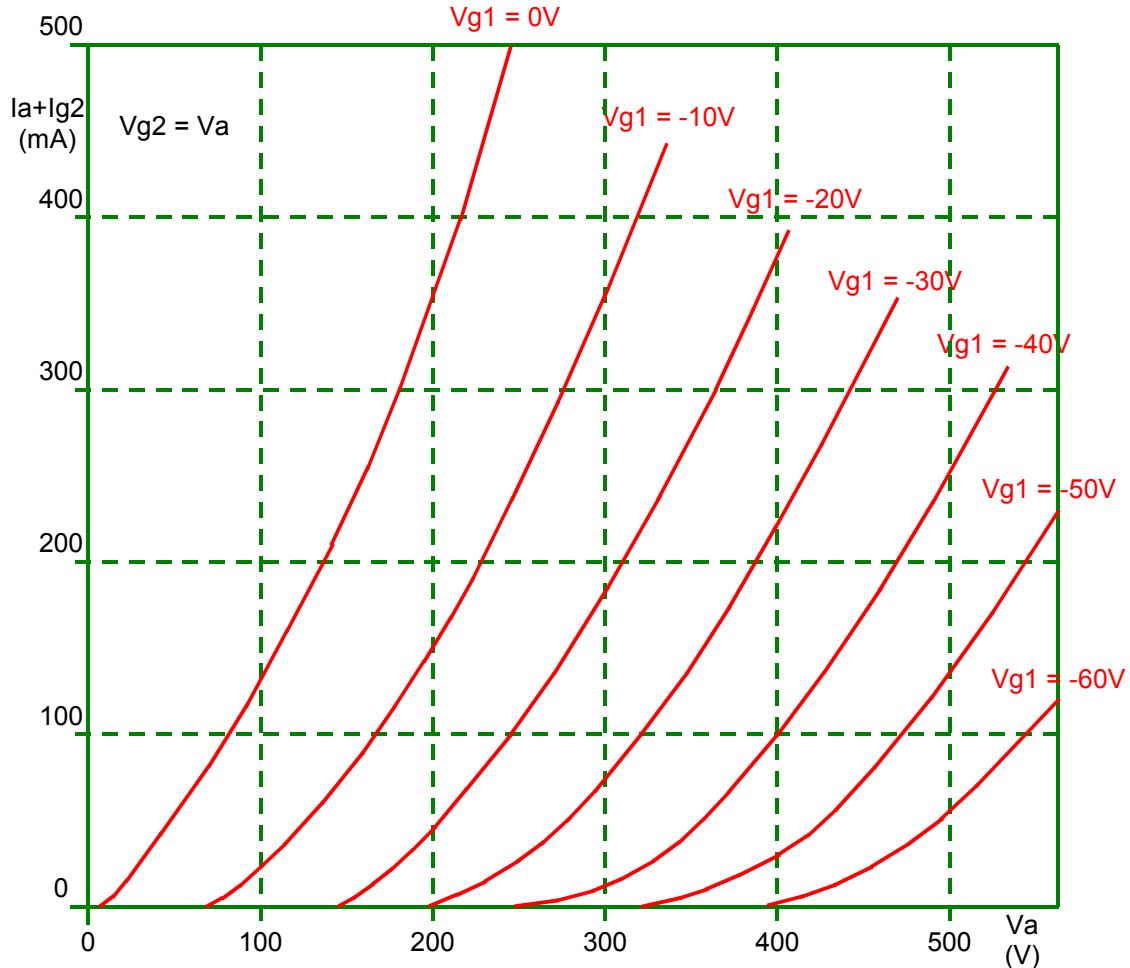

KT90

Average Transfer Characteristics

