

3X2500A3

MEDIUM-MU TRIODE

EITEL-McCULLOUGH, INC.

SAN BRUNO, CALIFORNIA

The Eimac 3X2500A3 is a medium-mu, forced-air-cooled, external-anode transmitting triode with a maximum plate-dissipation rating of 2500 watts. Relatively high power output as an amplifier, oscillator or modulator may be obtained from this tube at low plate voltages. A single tube will deliver a radio-frequency output of 7500 watts at 4000 plate volts at frequencies up to 110 Mc., as well as at lower frequencies.

The tube has a rugged, low-inductance cylindrical filament-stem structure, which readily becomes part of a linear filament tank circuit for V.H.F. operation. The grid provides thorough shielding between the input and output circuits for grounded-grid applications, and is conveniently terminated in a ring between the plate and filament terminals. As a result of the use of unique grid- and filament-terminal arrangements, it is possible to install or remove the 3X2500A3 without the aid of tools.

The approved Federal Communications Commission rating for the 3X2500A3 as a plate-modulated amplifier is 5000 watts of carrier power.

GENERAL CHARACTERISTICS

ELECTRICAL

Filament: Thoriated tungsten

Voltage	-	-	-	-	-	-	-	-	-	7.5	volts
Current	-	-	-	-	-	-	-	-	-	51	amperes
Amplification Factor (Average)	-	-	-	-	-	-	-	-	-	20	
Direct Interelectrode Capacitances (Average)	-	-	-	-	-	-	-	-	-		
Grid-Plate	-	-	-	-	-	-	-	-	-	20	μmfd
Grid-Filament	-	-	-	-	-	-	-	-	-	36	μmfd
Plate-Filament	-	-	-	-	-	-	-	-	-	1.2	μmfd
Transconductance ($I_b = 830$ ma., $E_b = 3000$ v.)	-	-	-	-	-	-	-	-	-	20,000	μhos
Highest Frequencies for Maximum Ratings	-	-	-	-	-	-	-	-	-	75	Mc

MECHANICAL

Base	-	-	-	-	-	-	-	-	-	see drawing	
Mounting	-	-	-	-	-	-	-	-	-	Vertical, base down or up	
Cooling	-	-	-	-	-	-	-	-	-	Forced air	
Maximum Anode Cooler Core and Seal Temperatures	-	-	-	-	-	-	-	-	-	-	150°C
Maximum Over-All Dimensions:	-	-	-	-	-	-	-	-	-	-	
Length	-	-	-	-	-	-	-	-	-	-	9.0 inches
Diameter	-	-	-	-	-	-	-	-	-	-	4.156 inches
Net Weight	-	-	-	-	-	-	-	-	-	-	6.25 pounds
Shipping Weight (Average)	-	-	-	-	-	-	-	-	-	-	17 pounds

RADIO-FREQUENCY POWER AMPLIFIER OR OSCILLATOR

(Conventional Neutralized Amplifier—Frequencies below 75 Mc.)
Class-C FM or Telephony (Key-down conditions, per tube)

MAXIMUM RATINGS

D-C PLATE VOLTAGE	-	-	-	-	-	6000 MAX. VOLTS	
D-C PLATE CURRENT	-	-	-	-	-	2.5 MAX. AMPS	
PLATE DISSIPATION	-	-	-	-	-	2500 MAX. WATTS	
PLATE COOLER CORE TEMPERATURE	-	-	-	-	-	150 MAX. °C	

GRID DISSIPATION*

- - - - - 150 MAX. WATTS

TYPICAL OPERATION (Frequencies below 75 Mc., per tube)

D-C Plate Voltage	-	-	-	-	-	4000	5000	6000	volts
D-C Plate Current	-	-	-	-	-	2.5	2.5	2.08	amps
D-C Grid Voltage	-	-	-	-	-	-300	-450	-500	
D-C Grid Current	-	-	-	-	-	245	265	180	ma
Peak R-F Grid Input Voltage	-	-	-	-	-	580	750	765	volts
Driving Power (approx.)	-	-	-	-	-	142	197	136	watts
Grid Dissipation	-	-	-	-	-	68	78	46	watts
Plate Power Input	-	-	-	-	-	10,000	12,500	12,500	watts
Plate Dissipation	-	-	-	-	-	2500	2500	2500	watts
Plate Power Output	-	-	-	-	-	7500	10,000	10,000	watts

TYPICAL OPERATION (110 Mc., per tube)									
D-C Plate Voltage	-	-	-	-	-	-	3700	4000	volts
D-C Grid Voltage	-	-	-	-	-	-	-450	-500	
D-C Plate Current	-	-	-	-	-	-	1.8	1.85	amps
D-C Grid Current	-	-	-	-	-	-	190	190	ma
Driving Power (approx.)	-	-	-	-	-	-	1600	1900	watts
Useful Power Output	-	-	-	-	-	-	6850	7500	watts

RADIO-FREQUENCY POWER AMPLIFIER

Grounded-Grid Circuit

Class-C FM Telephony

MAXIMUM RATINGS (Frequencies between 85 and 110 Mc.)

D-C PLATE VOLTAGE	-	-	-	-	-	4000 MAX. VOLTS	
D-C PLATE CURRENT	-	-	-	-	-	2.0 MAX. AMPS	
D-C GRID CURRENT*	-	-	-	-	-	200 MAX. MA	
PLATE DISSIPATION	-	-	-	-	-	2500 MAX. WATTS	
PLATE COOLER CORE TEMPERATURE	-	-	-	-	-	150 MAX. °C	
GRID DISSIPATION*	-	-	-	-	-	150 MAX. WATTS	

*See application notes.

TYPICAL OPERATIONS (Frequencies below 75 Mc., per tube)

D-C Plate Voltage	-	-	-	-	-	4000	4500	5000	volts
D-C Plate Current	-	-	-	-	-	1.67	1.55	1.45	amps
Total Bias Voltage	-	-	-	-	-	-450	-500	-550	
Fixed Bias Voltage	-	-	-	-	-	-230	-325	-410	volts
Grid Resistor	-	-	-	-	-	1500	1500	1400	ohms
D-C Grid Current	-	-	-	-	-	150	120	100	ma
Peak R-F Grid Input Voltage	-	-	-	-	-	680	720	760	volts
Driving Power (approx.)	-	-	-	-	-	102	86	76	watts
Grid Dissipation	-	-	-	-	-	35	26	21	watts
Plate Power Input	-	-	-	-	-	6670	6970	7250	watts
Plate Dissipation	-	-	-	-	-	1670	1670	1670	watts
Plate Power Output	-	-	-	-	-	5000	5300	5580	watts

PLATE-MODULATED RADIO-FREQUENCY

AMPLIFIER

(Conventional Neutralized Amplifier—Frequencies below 75 Mc.)

Class-C Telephony (Carrier conditions, per tube)

MAXIMUM RATINGS

D-C PLATE VOLTAGE	-	-	-	-	-	5000 MAX. VOLTS	
D-C PLATE CURRENT	-	-	-	-	-	2.0 MAX. AMPS	
PLATE DISSIPATION	-	-	-	-	-	1670 MAX. WATTS	
PLATE COOLER CORE TEMPERATURE	-	-	-	-	-	150 MAX. °C	
GRID DISSIPATION	-	-	-	-	-	150 MAX. WATTS	

TYPICAL OPERATIONS (Frequencies below 75 Mc., per tube)

D-C Plate Voltage	-	-	-	-	-	4000	4500	5000	volts
D-C Plate Current	-	-	-	-	-	1.67	1.55	1.45	amps
Total Bias Voltage	-	-	-	-	-	-450	-500	-550	
Fixed Bias Voltage	-	-	-	-	-	-230	-325	-410	volts
Grid Resistor	-	-	-	-	-	1500	1500	1400	ohms
D-C Grid Current	-	-	-	-	-	150	120	100	ma
Peak R-F Grid Input Voltage	-	-	-	-	-	680	720	760	volts
Driving Power (approx.)	-	-	-	-	-	102	86	76	watts
Grid Dissipation	-	-	-	-	-	35	26	21	watts
Plate Power Input	-	-	-	-	-	6670	6970	7250	watts
Plate Dissipation	-	-	-	-	-	1670	1670	1670	watts
Plate Power Output	-	-	-	-	-	5000	5300	5580	watts

IF IT IS DESIRED TO OPERATE THIS TUBE UNDER CONDITIONS WIDELY DIFFERENT FROM THOSE GIVEN UNDER "TYPICAL OPERATION", POSSIBLY EXCEEDING THE MAXIMUM RATINGS GIVEN FOR CW SERVICE, WRITE EITEL-McCULLOUGH, INC., FOR INFORMATION AND RECOMMENDATIONS.

AUDIO-FREQUENCY POWER AMPLIFIER AND MODULATOR

Class B (Sinusoidal wave, two tubes unless otherwise specified)

MAXIMUM RATINGS

D-C PLATE VOLTAGE	- - -	6000	MAX. VOLTS
MAX-SIGNAL D-C PLATE CURRENT, PER TUBE	- - -	2.5	MAX. AMPS
PLATE DISSIPATION, PER TUBE	- - -	2500	MAX. WATTS
PLATE COOLER CORE TEMPERATURE	- - -	150	MAX. ° C
TYPICAL OPERATION CLASS AB₂ (Two tubes)			
D-C Plate Voltage	- - -	4000	5000
D-C Grid Voltage (approx.)*	- - -	-155	-200
Zero-Signal D-C Plate Current	- - -	0.4	0.4
Max-Signal D-C Plate Current	- - -	1.35	1.13
Effective Load, Plate to Plate	- - -	6600	10,000
Peak A-F Grid Input Voltage (per tube)	- - -	2200	3600
Peak A-F Grid Input Voltage (per tube)	- - -	340	360
Max-Signal Peak Driving Power (approx.)	- - -	340	230
Max-Signal Nominal Driving Power	- - -	170	115
Max-Signal Plate Power Output	- - -	11,000	11,000
			13,000
		watts	watts

TYPICAL OPERATION CLASS AB₂ (Two tubes)

(Modulator service for 4000 and 5000 volt operation, to modulate one or two tubes, as shown under "Plate Modulated Radio Frequency Amplifier.")

D-C Plate Voltage	- - -	4000	5000	4000	5000	volts
D-C Grid Voltage (approx.)*	- - -	-155	-200	-145	-190	volts
Zero-Signal D-C Plate Current	- - -	0.4	0.4	0.6	0.5	amps
Max-Signal D-C Plate Current	- - -	1.35	1.13	2.70	2.26	amps
Effective Load, Plate to Plate	- - -	6600	10,000	3300	5000	ohms
Peak A-F Grid Input Voltage (per tube)	- - -	240	275	285	310	volts
Max-Signal Peak Driving Power	- - -	42	40	134	118	watts
Max-Signal Nominal Driving Power (approx.)	- - -	21	20	67	59	watts
Max-Signal Plate Power Output	- - -	3700	4000	7400	8000	watts
Will Modulate R. F. Final Input of	- - -	6670	7250	13,340	14,500	watts

*Adjust to give stated zero-signal plate current.

APPLICATION

► **Cooling**—A minimum air flow of 120 cubic feet per minute must be passed through the anode cooler. The pressure drop across the cooler at this rate of flow equals 1.0 inch of water when the tube is cold, and increases with rising temperature to 1.25 inches when the plate dissipation attains its rated maximum value of 2500 watts.

A minimum air flow of 6 cubic feet per minute must also be directed into the filament stem structure between the inner and outer filament terminals. Cooling air in the above quantities must be supplied to the anode cooler and the filament seals before filament voltage is applied, and the air flow should be maintained for at least one minute after the filament power has been removed. Simultaneous removal of all power and air (as in case of power failure) will not ordinarily injure the tube, but it is not recommended as a standard operating practice. Anode-cooler-core, grid- and filament-seal temperatures must not exceed 150° C.

The figures above are for an ambient temperature of 20° C at sea level and do not include duct or filter losses. Further information regarding operation at higher ambient temperatures or higher altitudes is available in an article entitled "Blower Selection for Forced Air Cooled Tubes", by A. G. Nekut, in the August, 1950, issue of "Electronics".

Filament Voltage—The filament voltage, as measured directly at the tube, should be 7.5 volts with maximum allowable variations due to line fluctuation of from 7.12 to 7.87 volts.

Bias Voltage—There is little advantage in using bias voltages in excess of those given under "Typical Operation", except in certain very specialized applications. Where bias is obtained from a grid resistor, suitable protective means must be provided to prevent excessive plate dissipation in the event of loss of excitation.

Plate Voltage—The plate-supply voltage for the 3X2500A3 should not exceed 6000 volts. In most cases there is little advantage in using plate-supply voltages higher than those given under "Typical Operation" for the power output desired.

In Class-C FM or Telegraphy service, a 0.1 henry choke, shunted by a spark gap, should be series connected between the plates of the amplifier tubes and the high-voltage-plate-supply capacitor to offer protection from transients and surges. In plate-modulated service, where a plate-modulation transformer is used, the protective choke is not normally required.

Grid Dissipation—The power dissipated by the grid of the 3X2500A3 must never exceed 150 watts. Grid dissipation may be calculated from the following expression:




$$P_g = e_{cmp} I_c$$

where P_g = Grid dissipation,
 e_{cmp} = Peak positive grid voltage, and
 I_c = D-c grid current.

e_{cmp} may be measured by means of a suitable peak voltmeter connected between filament and grid. Any suitable peak v.t.v.m. circuit may be used (one is shown in "Vacuum Tube Ratings", Eimac News, January 1945. This article is available, in reprint form on request).



In equipment in which the plate loading varies widely, such as oscillators used for radio-frequency heating, care should be taken to make certain that the grid dissipation does not exceed the maximum rating under any condition of loading.

In VHF operation, particularly above 75 Mc., the d-c grid current must not exceed 200 ma. under any conditions of plate loading. With lightly loaded conditions the grid driving power should be reduced so that the grid current does not exceed one-tenth of the plate current.

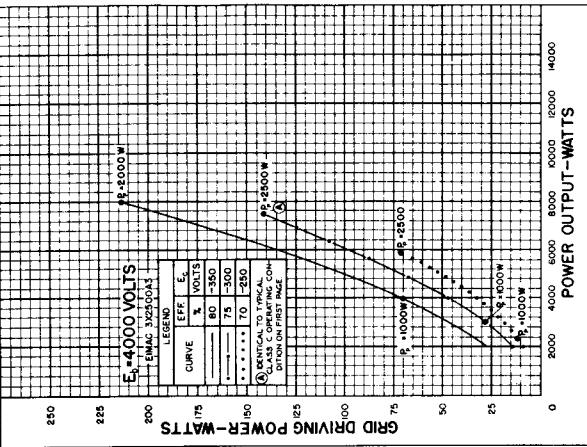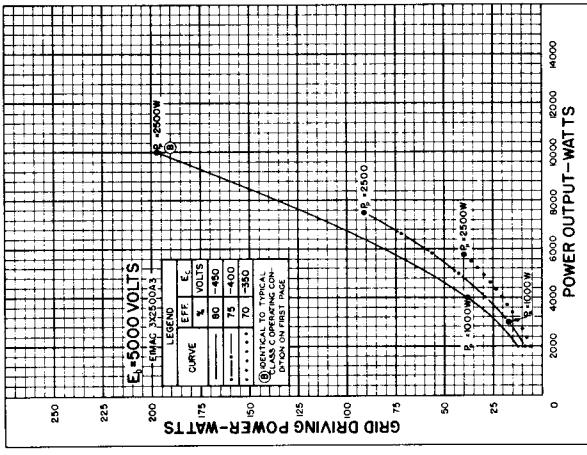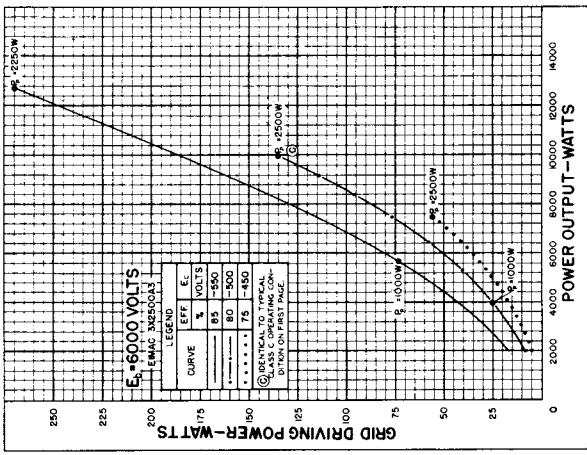


DRIVING POWER v.s. POWER OUTPUT

The three charts on this page show the relationship of plate efficiency, power output and approximate grid driving power at plate voltages of 4000, 5000 and 6000 volts. These charts show combined grid and bias losses only. The driving-power and power-output figures do not include circuit losses. The plate dissipation in watts is indicated by P_p. Points A, B, and C are identical to the typical Class C operating conditions shown on the first page under 4000, 5000 and 6000 volts respectively.

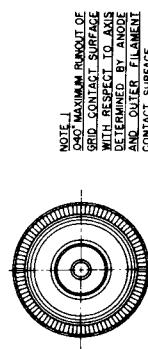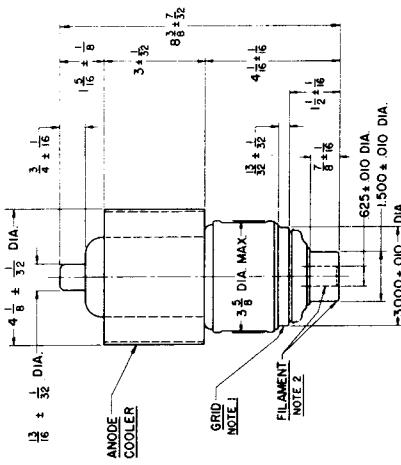

TYPICAL TUBE CONNECTORS AND STEM COOLING

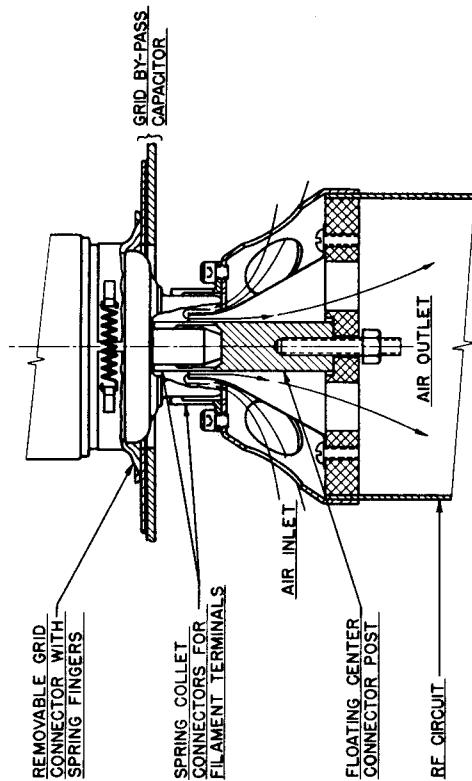

NOTE 1
.040 MAXIMUM RUNOUT OF GRID CONTACT SURFACE WITH RESPECT TO AXIS DETERMINED BY ANODE AND OUTER FILAMENT CONTACT SURFACE.

NOTE 2
.040 MAXIMUM RUNOUT OF INNER FILAMENT CONTACT SURFACE WITH RESPECT TO AXIS TO OUTER FILAMENT CONTACT SURFACE.

NOTE 3
.023 MAXIMUM CONTACT SURFACE WITH RESPECT TO AXIS TO OUTER FILAMENT CONTACT SURFACE.

