



**ELECTRONIC
INNOVATIONS
IN ACTION**

TUBES

— PRODUCT INFORMATION —

6V6-GTA

Beam Pentode

The 6V6-GTA is a beam-power pentode designed for use in the audio-frequency power output stage of television and radio receivers. In this application, it is capable of supplying high power output with high sensitivity, high efficiency, and low third and higher-order harmonic distortion. The 6V6-GTA may also be used as a triode-connected vertical-deflection amplifier in television receivers.

Except for heater ratings, the 6V6-GTA is identical to the 6V6-GT.

GENERAL

ELECTRICAL

Cathode - Coated Unipotential

Series	Parallel
Circuit*	Circuit†

Heater Voltage, AC or DC . . . 6.3 6.3 ± 0.6 § Volts
 Heater Current. 0.45 ± 0.03 § 0.45¶ Amperes
 Heater Warm-up Time, Average# . . . 11 --- Seconds
 Direct Interelectrode Capacitances, Approximate Δ
 Grid-Number 1 to Plate: (g1 to p). . . . 0.7 pf
 Input: g1 to (h + k + g2 + b.p.) . . . 9.0 pf
 Output: p to (h + k + g2 + b.p.) . . . 7.5 pf

MECHANICAL

Operating Position - Any

Envelope - T-9, Glass

Base - B6-81 or B7-7, Intermediate Shell Octal
 or B6-84 or B7-59, Short Intermediate Shell
 Octal

Outline Drawing - EIA 9-11 or 9-41

Maximum Diameter 1.281 Inches

Maximum Bulb Diameter . . . 1.188 Inches

Maximum Over-all Length. . . 3.313 Inches

Maximum Seated Height . . . 2.750 Inches


MAXIMUM RATINGS

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.


PHYSICAL DIMENSIONS

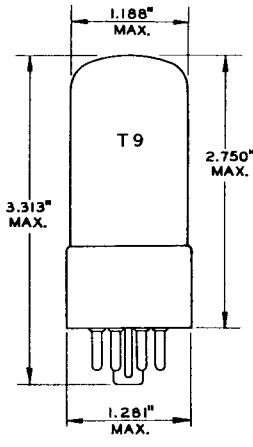

TERMINAL CONNECTIONS

- Pin 1 - No Connection
- Pin 2 - Heater
- Pin 3 - Plate
- Pin 4 - Grid Number 2 (Screen)
- Pin 5 - Grid Number 1
- Pin 6 - No Connection
- Pin 7 - Heater
- Pin 8 - Cathode and Beam Plates

BASING DIAGRAM

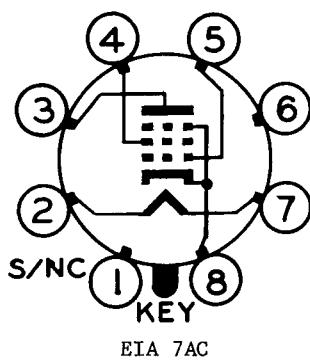

GENERAL ELECTRIC

Supersedes 6V6-GTA D and R Sheet dated 7-63

MAXIMUM RATINGS (Cont'd)

DESIGN-MAXIMUM VALUES UNLESS OTHERWISE INDICATED

	Class A, Amplifier	Vertical Deflection Amplifier** (Triode Connection)##	
DC Plate Voltage 350	350	Volts
Peak Positive Pulse Plate Voltage ---	1200\$§	Volts
Screen Voltage 315	---	Volts
Peak Negative Grid-Number 1 Voltage ---	275	Volts
Plate Dissipation¶¶ 14	10	Watts
Screen Dissipation. 2.2	---	Watts
DC Cathode Current. ---	40	Milliamperes
Peak Cathode Current ---	115	Milliamperes
Heater-Cathode Voltage			
Heater Positive with Respect to Cathode			
DC Component 100	100	Volts
Total DC and Peak. 200	200	Volts
Heater Negative with Respect to Cathode			
Total DC and Peak. 200	200	Volts
Grid-Number 1 Circuit Resistance			
With Fixed Bias 0.1	---	Megohms
With Cathode Bias 0.5	2.2	Megohms

CHARACTERISTICS AND TYPICAL OPERATION

CLASS A, AMPLIFIER

Plate Voltage 180	250	315	Volts
Screen Voltage 180	250	225	Volts
Grid-Number 1 Voltage -8.5	-12.5	-13	Volts
Peak AF Grid-Number 1 Voltage 8.5	12.5	13	Volts
Plate Resistance, approximate 50000	50000	80000	Ohms
Transconductance 3700	4100	3750	Micromhos
Zero-Signal Plate Current 29	45	34	Milliamperes
Maximum-Signal Plate Current 30	47	35	Milliamperes
Zero-Signal Screen Current 3.0	4.5	2.2	Milliamperes
Maximum-Signal Screen Current 4.0	7.0	6.0	Milliamperes
Load Resistance. 5500	5000	8500	Ohms
Total Harmonic Distortion, approximate 8	8	12	Percent
Maximum-Signal Power Output. 2.0	4.5	5.5	Watts

PUSH-PULL CLASS AB₁ AMPLIFIER, VALUES FOR TWO TUBES

Plate Voltage 250	285	Volts
Screen Voltage 250	285	Volts
Grid-Number 1 Voltage. -15	-19	Volts
Peak AF Grid-to-Grid Voltage 30	38	Volts
Zero-Signal Plate Current 70	70	Milliamperes
Maximum-Signal Plate Current 79	92	Milliamperes
Zero-Signal Screen Current 5.0	4.0	Milliamperes
Maximum-Signal Screen Current 13	13.5	Milliamperes
Effective Load Resistance, Plate-to-Plate 10000	8000	Ohms
Total Harmonic Distortion 5	3.5	Percent
Maximum-Signal Power Output. 10	14	Watts


CHARACTERISTICS AND TYPICAL OPERATION (Cont'd)

AVERAGE CHARACTERISTICS, TRIODE CONNECTION

NOTES

- * Operated with the heater in series with the heaters of other tubes having the same bogey heater current.
 - # Operated with the heater in parallel with the heaters of other tubes having the same bogey heater current.
 - § For parallel heater operation, the equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance; for series heater operation, the equipment designer should design the equipment so that heater current is centered at the specified bogey value, with heater supply variations restricted to maintain heater current within the specified tolerance.
 - ¶ Heater current of a bogey tube at $E_f = 6.3$ volts.
 - # The time required for the voltage across the heater to reach 80 percent of the bogey value after applying 4 times the bogey heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times the bogey heater voltage divided by the bogey heater current.
 - △ Without external shield.
 - ¢ Pin 1 is omitted on bases B6-81 and B6-84.
 - ** For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.
 - ## With screen connected to plate.
 - \$\$ Value given is to be considered as an Absolute-Maximum rating. In this case, the combined effect of supply voltage variation, manufacturing variation including components in the equipment, and adjustment of equipment controls should not cause the rated value to be exceeded.
 - ¶¶ In stages operating with grid-leak bias, an adequate cathode-bias resistor or other suitable means is required to protect the tube in the absence of excitation.


AVERAGE PLATE CHARACTERISTICS

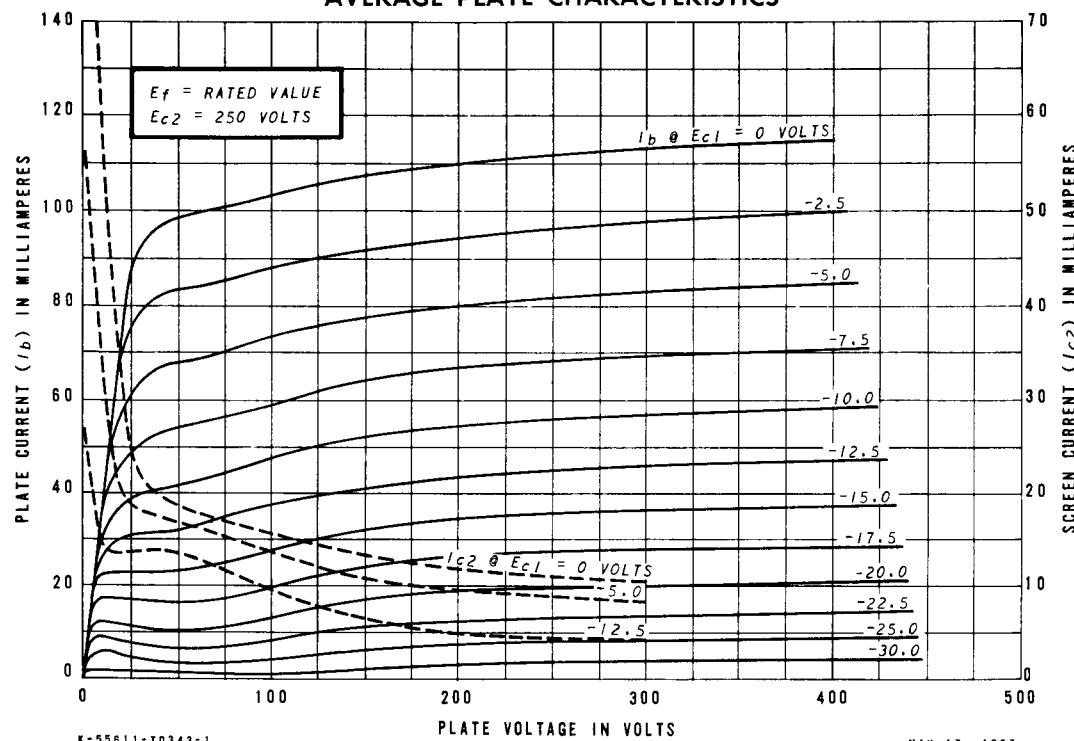

K-55611-TD343-1

MAY 17, 1967


AVERAGE PLATE CHARACTERISTICS

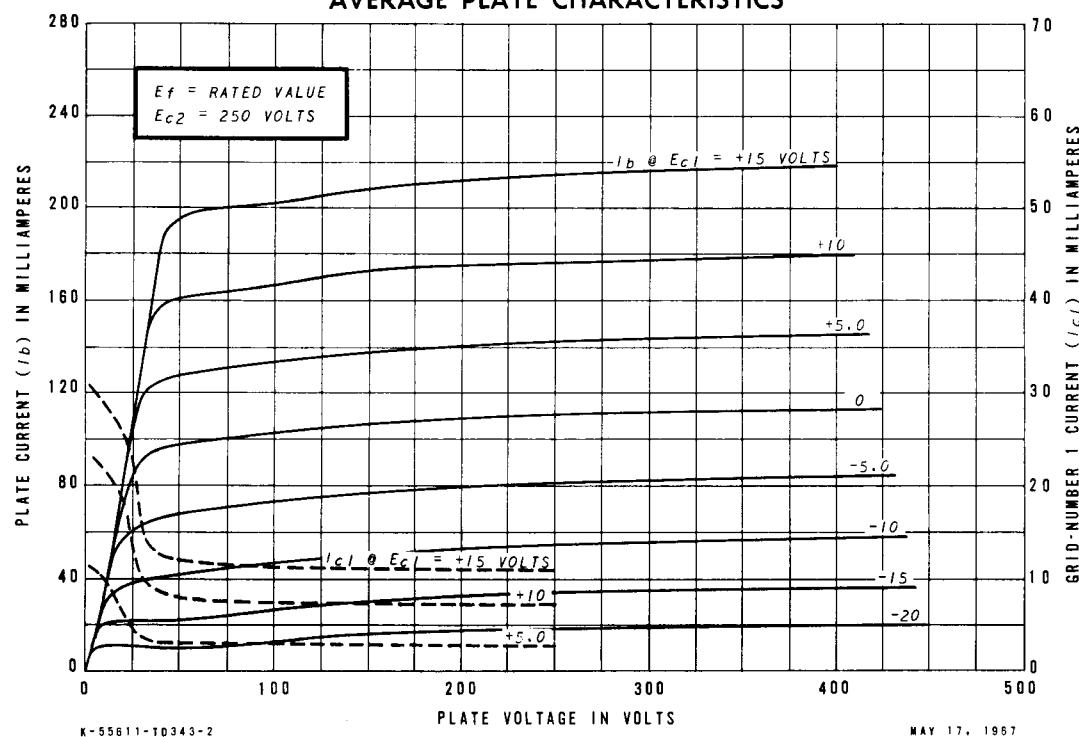


K-55611-TD343-2

MAY 17, 1967


AVERAGE PLATE CHARACTERISTICS

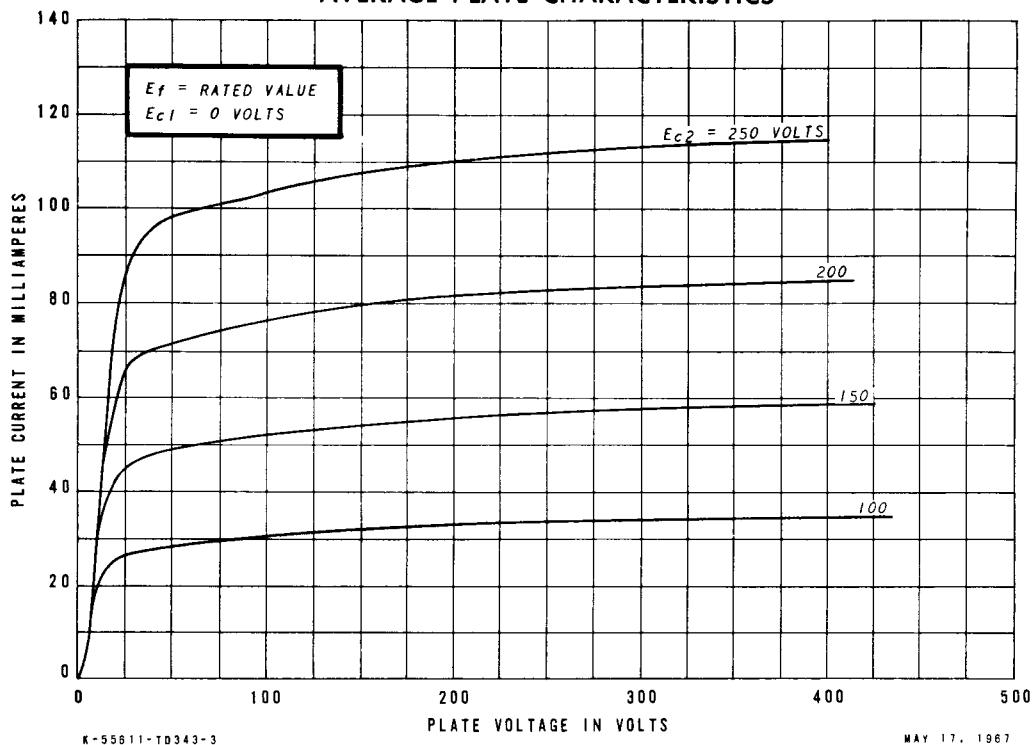

AVERAGE PLATE CHARACTERISTICS
TRIODE CONNECTION

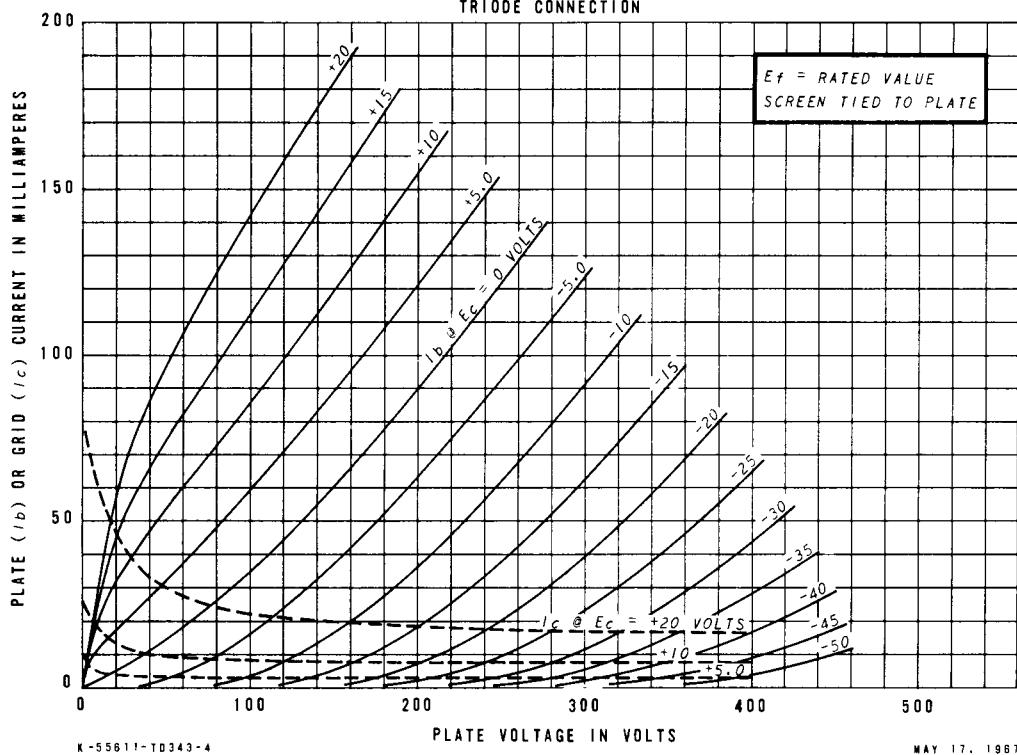


AVERAGE TRANSFER CHARACTERISTICS

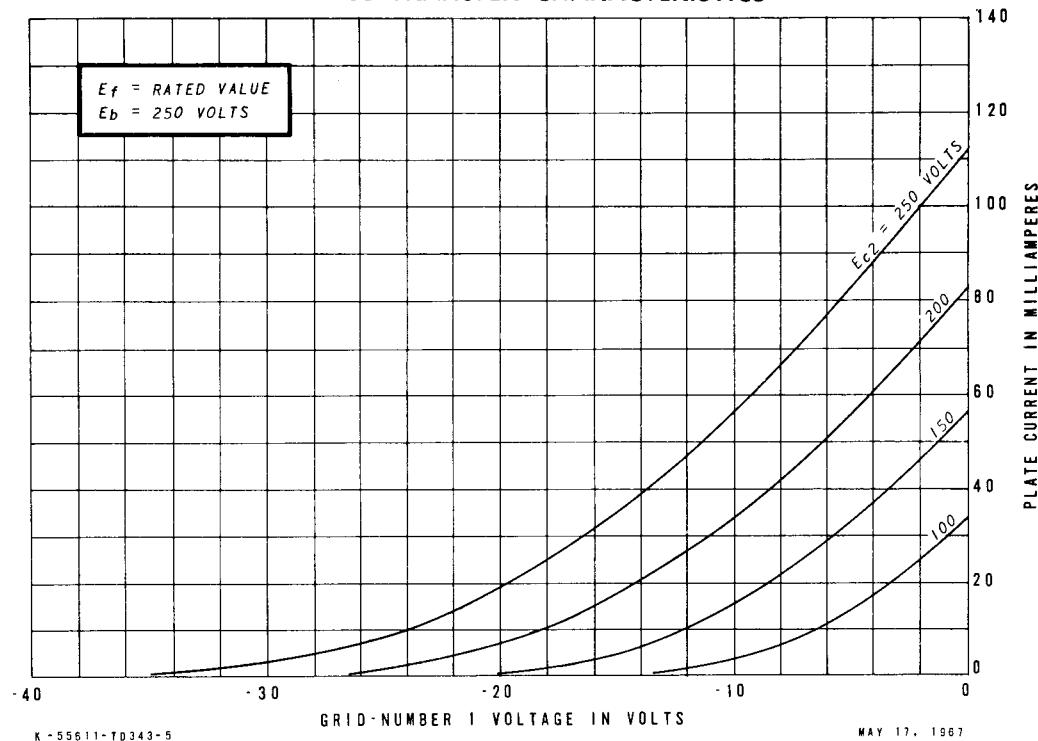

K - 55611-TD343-5

MAY 17, 1967

AVERAGE TRANSFER CHARACTERISTICS

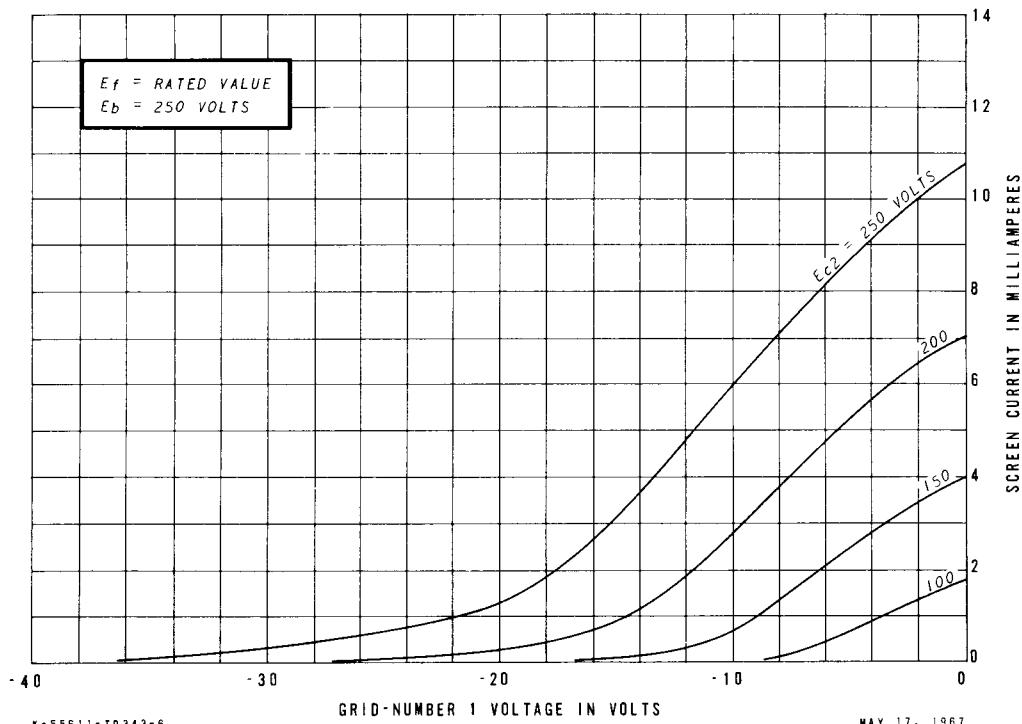

K - 55611-TD343-6

MAY 17, 1967

OPERATION CHARACTERISTICS

