

Mullard SCREENED TETRODE

DBS1

TENTATIVE DATA

Filament $V_f = 1.5$ V
 $I_f = 0.07$ A

Capacities $C_{ag1} = 0.07$ $\mu\mu\text{F}$
 $C_{g1} = 5.7$ $\mu\mu\text{F}$
 $C_a = 3.4$ $\mu\mu\text{F}$


Operating Conditions

V_a	120	120	V
V_{g2}	45	60	V
$-V_g$	2.0	2.7	V
I_a	0.8	1.5	mA
S	0.43	0.58	mA/V
R_i	0.65	0.5	$\text{M}\Omega$

Limiting Values

V_a max	120	V
V_{g2} max	60	V
R_{g1} max	2.0	$\text{M}\Omega$

Arrangement of electrodes and base connections.

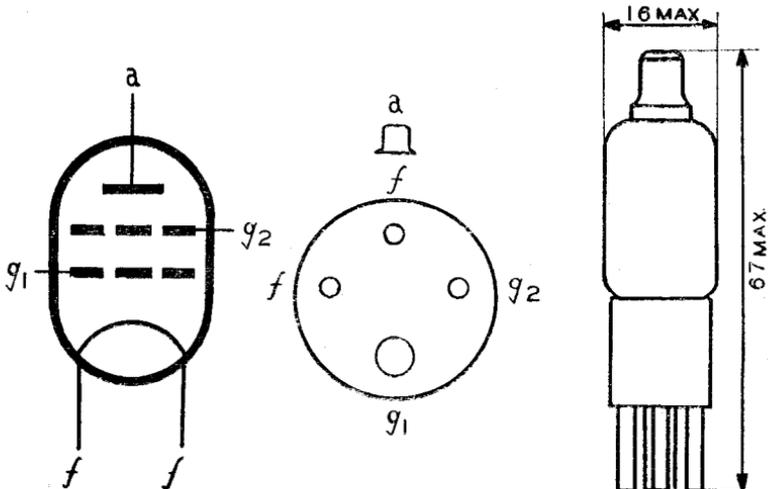

DBS1

DBS1

Mullard SCREENED TETRODE

