


V2 (REV B)

Ampeg



- NOTES:—ALL RESISTORS IN OHMS $\frac{1}{2}$ W 10% UNLESS OTHERWISE SPECIFIED.
 —ALL CAPACITORS IN MFD. & 400V UNLESS OTHERWISE SPECIFIED.
 —DC VOLTAGE READINGS WITH NO SIGNAL APPLIED USING A 2000Ω PER VOLT VOLTMETER.
 —NUMBERS IN PARENTHESIS REFER TO AMPEGS PART NO.
 —PARTS DESIGNATED BY * ARE IN 240V MODELS ONLY. THE P.T. FOR 240V MODELS HAS BLK. WIRE CONNECTED TO BLUE WIRE
 —DC VOLTAGE READINGS ARE POSITIVE WITH RESPECT TO CHASSIS GROUND UNLESS OTHERWISE SPECIFIED.
 —CIRCUIT OF CHASSIS MAY VARY SLIGHTLY FROM THAT SHOWN HERE DUE TO NORMAL PRODUCTION CHANGES.
 —D7-D8 ARE SILICON AX TYPE 1AMP 1400 VOLTS DIODES.

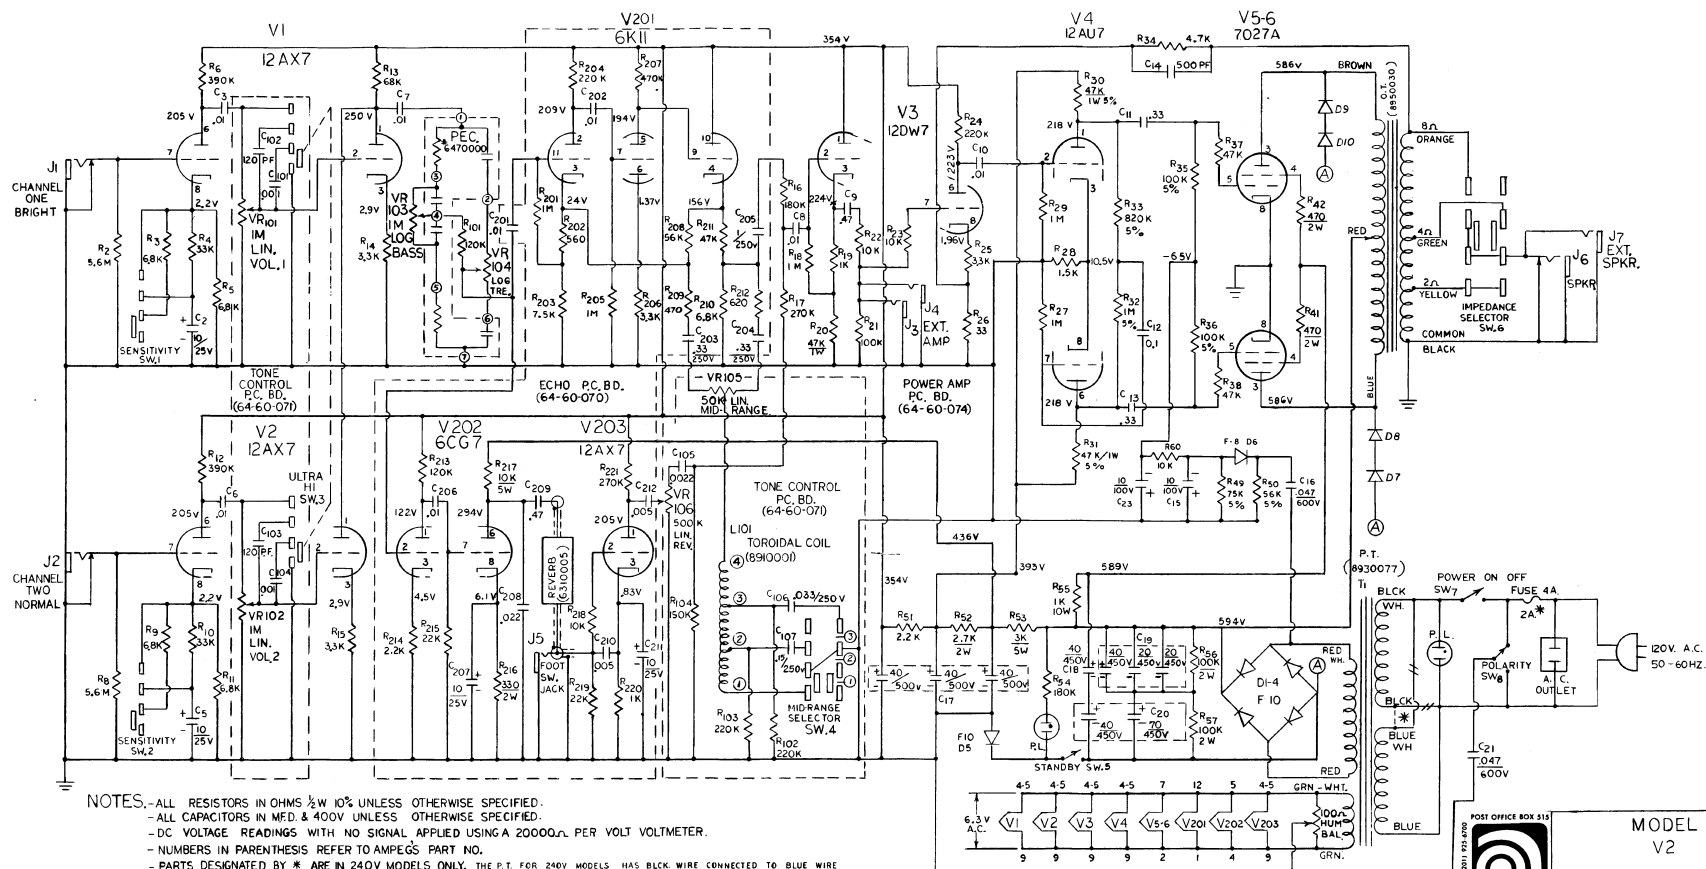

MODEL V2				
U.S. PATENT PENDING.				
DRN BY	DATE	DWG. NO.	PART	NO. REV.
CC	6/71	06800	400268	B