


TWIN-AMP 6G8-A

Fender

FENDER "TWIN-AMP" LAYOUT MODEL 6G8-A

NOTICE

VOLTAGES READ TO GROUND WITH ELECTRONIC
VOLTMETER. VALUES SHOWN $\pm$ OR $- 20\%$

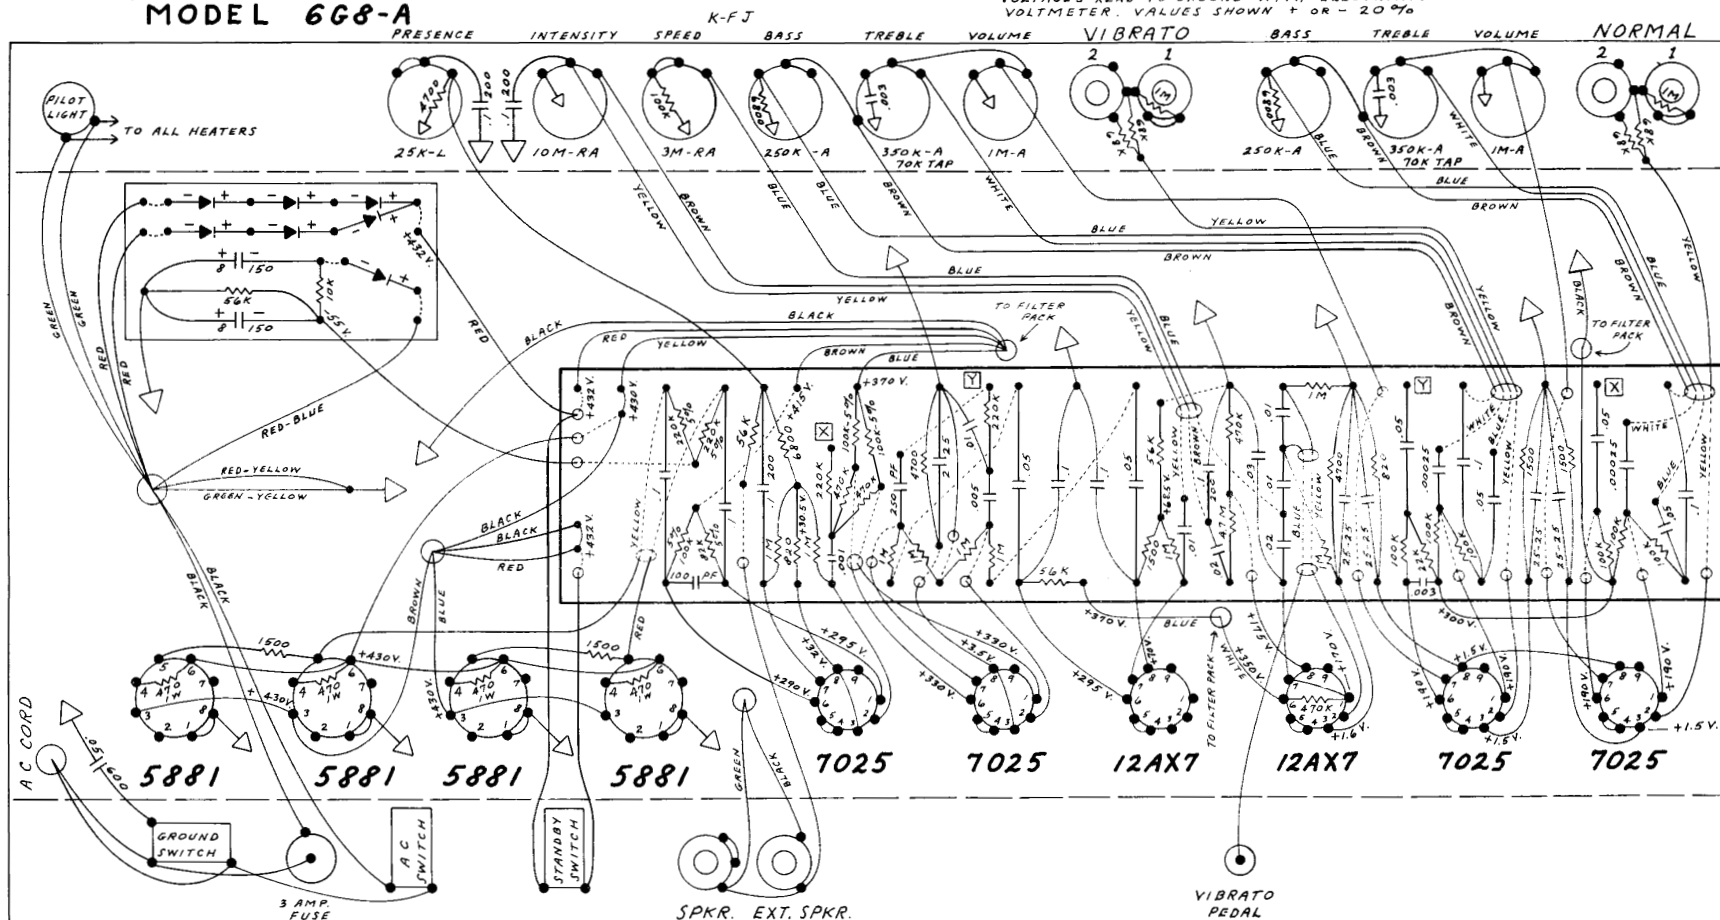

NOTE- ALL RESISTORS $\frac{1}{2}$ WATT, 10% TOLERANCE, IF NOT SPECIFIED.

NOTE- ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED.

FENDER "TWIN-AMP" SCHEMATIC

MODEL 6G8-A K-FJ

CIRCUIT PATENTS #2817708, #2973681
TONE CONTROL CIRCUITS PAT. PEND.

NOTICE

- 1- VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER. VALUES SHOWN + OR - 20%
- 2- ALL RESISTORS 1/2 WATT, 10% TOLERANCE IF NOT SPECIFIED.
- 3- ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED.

