



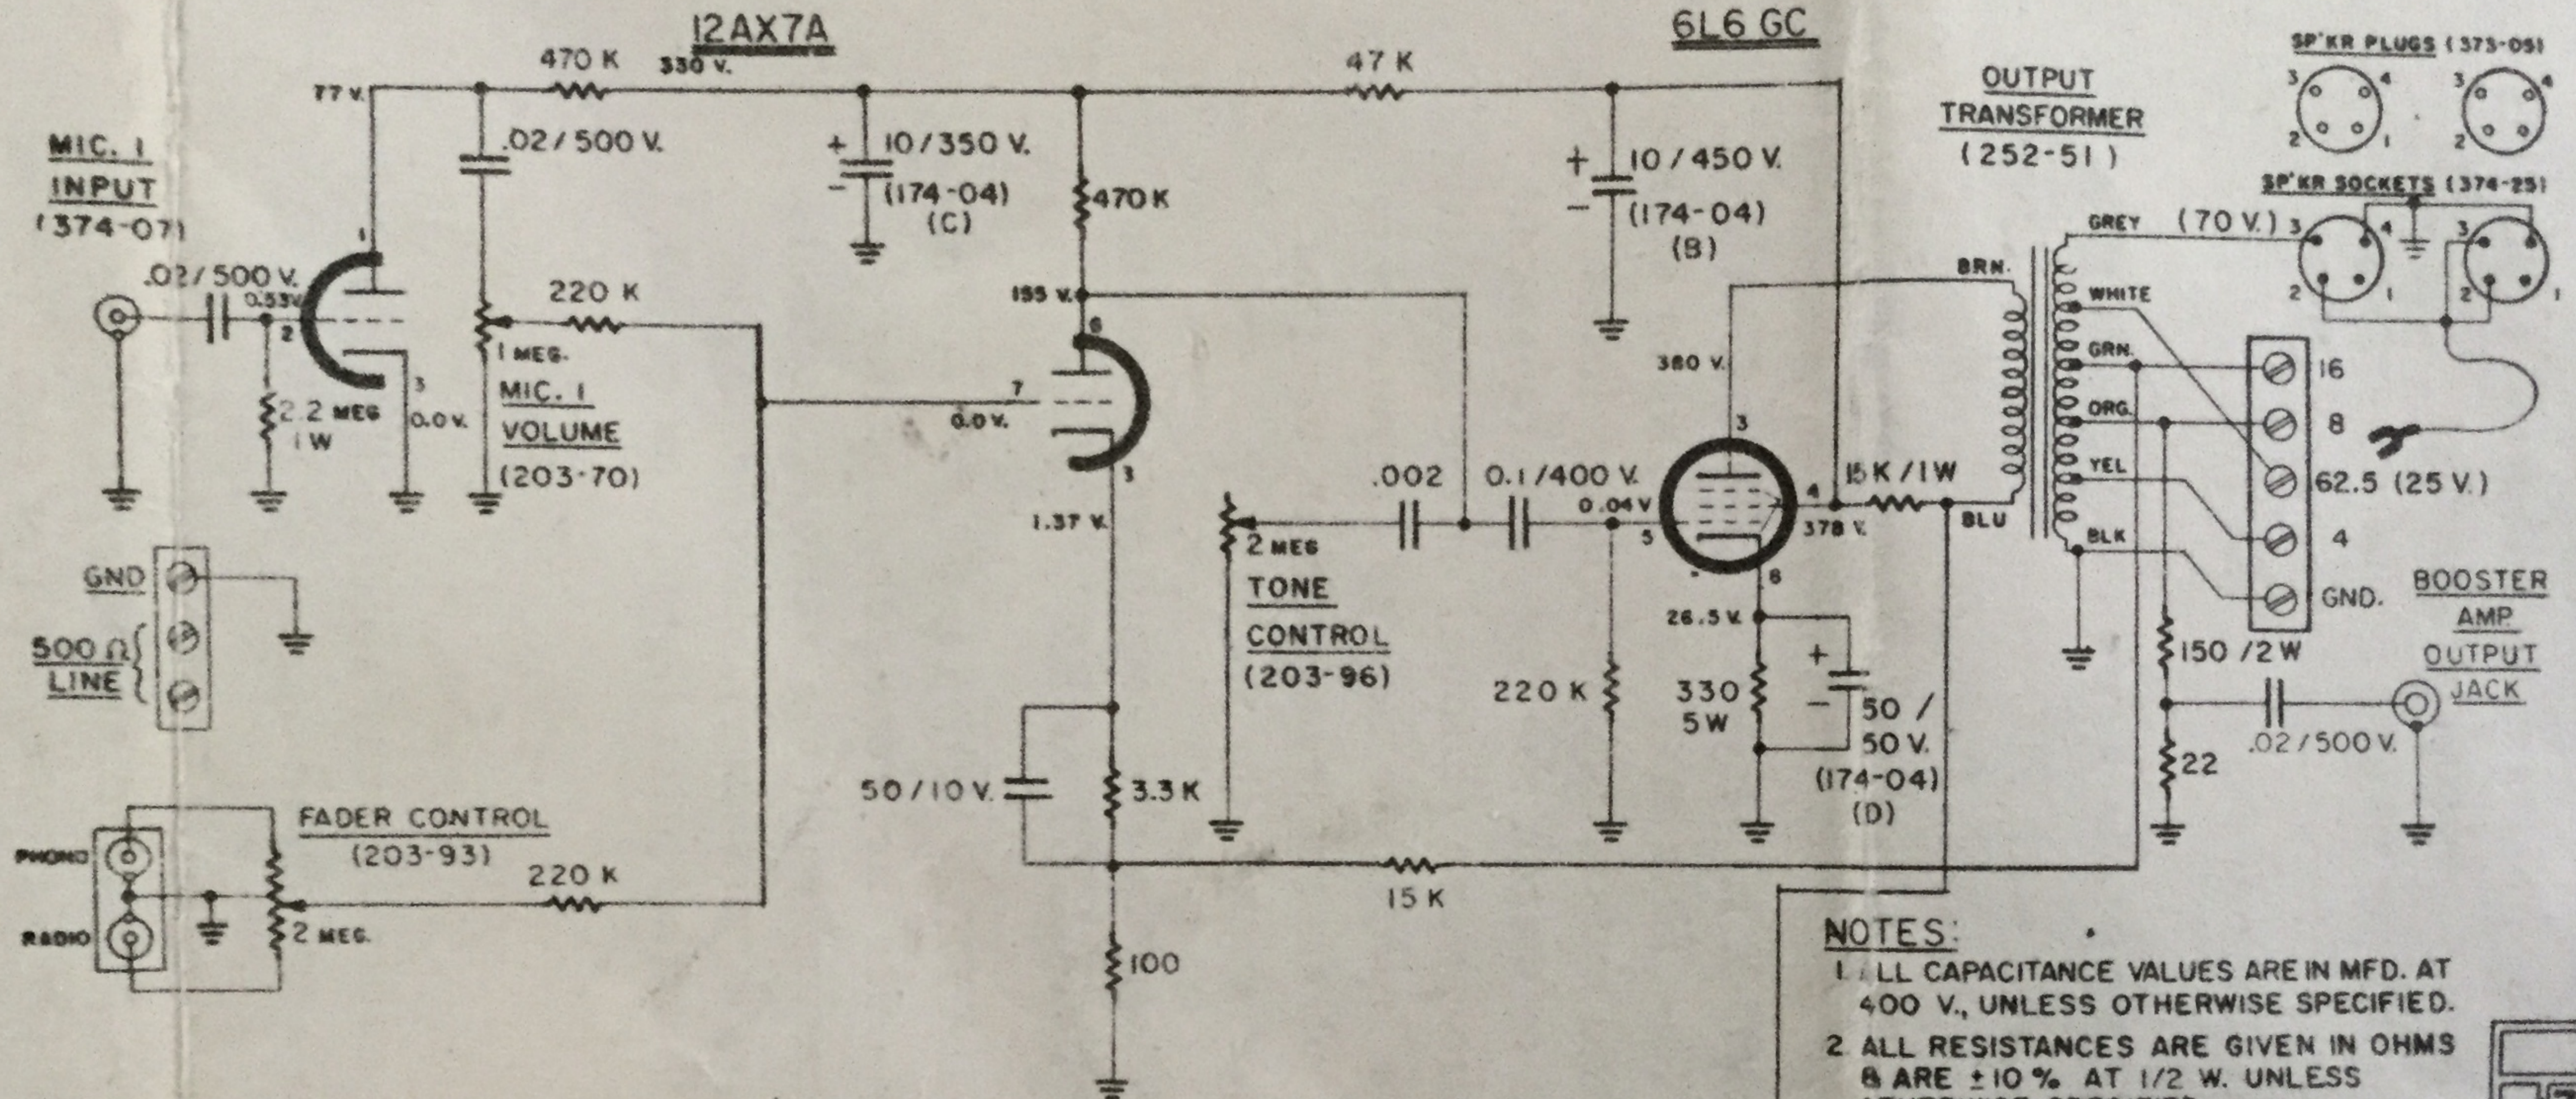


#### NOTES:

1. ALL CAPACITANCE VALUES ARE IN MFD. AT 400 V., UNLESS OTHERWISE SPECIFIED.
2. ALL RESISTANCES ARE GIVEN IN OHMS & ARE  $\pm 10\%$  AT 1/2 W. UNLESS OTHERWISE SPECIFIED.
3. NUMBERS IN PARENTHESES REFER TO THIS MANUFACTURER'S PART NUMBERS.
4. USE AMPHENOL CABLE CONNECTOR NO. 75MCIF FOR CONNECTION TO MIC. INPUT JACK. USE CINC-JONES CONNECTOR NO. 13A FOR CONNECTION TO PHONO & RADIO INPUTS. THESE CONNECTORS ARE NOT SUPPLIED WITH THIS EQUIPMENT.
5. TWO SPEAKER PLUGS, PART NO. (373-05) ARE SUPPLIED WITH EACH UNIT.
6. ALL VOLTAGES ARE D.C. VOLTAGE READINGS TO CHASSIS GROUND, TAKEN WITH A V.T.V.M.

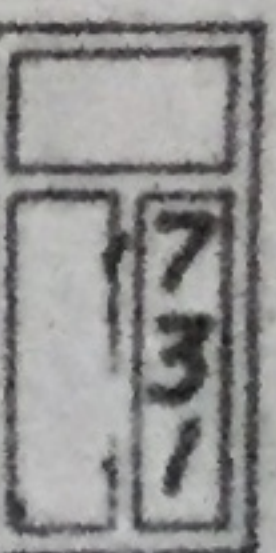

#### 6V4/EZ80

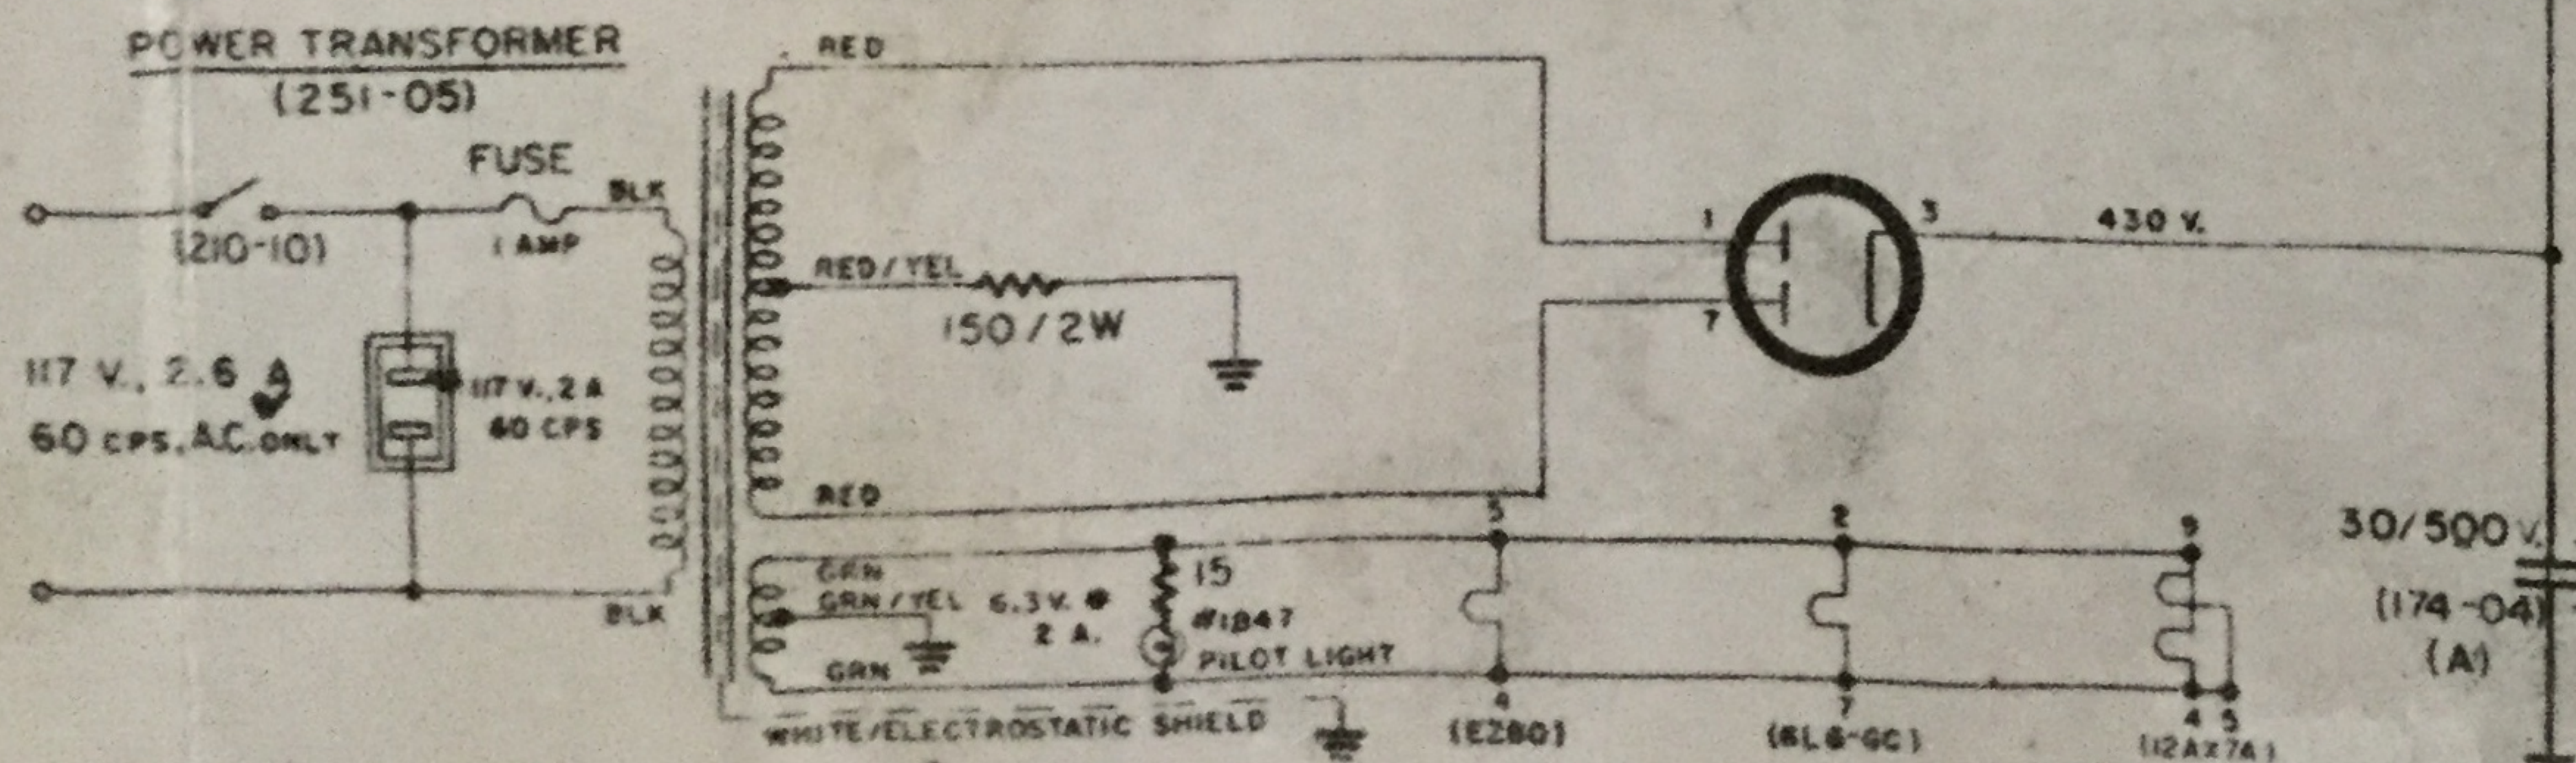

11 WATT  
PA AMPLIFIER MODEL FMA-11  
FANNON ELECTRONIC INDUSTRIES, INC.  
NEWARK, N.J.