

THE CSI HIGH SPEED ANGLE CENTRIFUGE



CS-26

- 20,000 RCF x g
- Two styles interchangeable rotors for maximum flexibility.
- Self-balancing precision rotors machined from special hand-forged duralumin alloy.
- Modern design unit housing with integral control panel and guard. Fully corrosion resistant.
- Tube angle 32°.
- Speed control fully adjustable.
- Low in first cost.
- Low in maintenance cost.

FOR INFORMATION WRITE DEPT. "S"



CUSTOM SCIENTIFIC INSTRUMENTS, INC.
Post Office Box 170 Arlington, N. J.




IMPORTANT IN
HIGH VACUUM WORK
APIEZON®
OILS, GREASES, WAXES

Apiezon products have the recognition of leading scientists who accord them top preference for high vacuum work. A bulletin just off the press describes the physical characteristics of a variety of special oils, greases and waxes for oil-diffusion pumps, sealing joints, stop cocks, etc. You should have a copy to augment your store of knowledge on the subject. Mailed free; simply ask for Bulletin 43-S.



JAMES G. BIDDLE CO.
1312 ARCH STREET, PHILADELPHIA, PA.

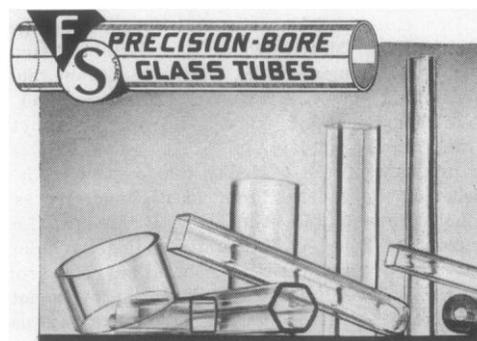

Cylindrical, Tapered or Square Shaped

F. S. Precision-Bore Glass Tubes are made to exact inside dimensions for application where interchangeability and precise bore are required.

Inside diameter: 0.216 mm (0.0085") to 100 mm (4") kept accurate within .01 to .001 mm ($\pm .0004"$ to $.00004"$).

For: Manometers, Viscosimeters, Flowmeters, Barometers, Gauges, Pumps and many other scientific, technical and industrial purposes.

Ask for Bulletin PB-298

Made of Pyrex or Kimble NC. glass

FISH-SCHURMAN CORPORATION
74 Portman Road, New Rochelle, N. Y.

Fish-Schurman 