

Letters

Handling Carcinogens

Like David H. Fine (Letters, 26 Jan., p. 329), we find it incredible that some manufacturers of *N*-nitrosamines can be "apparently unaware or unconcerned about the toxic nature of such volatile carcinogens, which are so hazardous that they should be handled under conditions as stringent as those required for radioactive materials." We too have received nitrosamine samples in quantities of 10 and 25 grams packed in glass bottles with only a simple screw cap and carrying no warning whatsoever about the carcinogenic properties and the rather volatile character of the contents.

We have informed the manufacturers and their local representatives of our concern about the absence of adequate warning labels and of precautions with regard to shipment.

This unawareness or lack of caution is not a general phenomenon, since another important distributor of *N*-nitrosamines, Schuchardt GmbH, Munich, ships these samples in closed glass ampoules, which are "canned," together with a porous absorbent material, in a metal container. Both the glass and the metal container bear warning labels with detailed information about the carcinogenic properties of the compound inside. An instructive warning leaflet accompanies the shipment. These precautions seem adequate and should be taken as an example by other manufacturers.

We should like to direct the attention of fellow workers to a recommended code of practice for laboratory staff, drafted in 1966 by the Chester Beatty Research Institute of the Royal Cancer Hospital, London, entitled: "Precautions for laboratory workers who handle carcinogenic aromatic amines." This code of practice also covers the nitrosamines. We would also like to mention that the staff of the U.S. National Cancer Institute's Carcinogenesis Program is presently mailing reply forms on these and other prob-

lems to those engaged in nitrosamine research.

All technical staff working with nitrosamines should be carefully instructed. For most laboratories, problems in personnel management may arise, since the code of practice recommends that young persons should not be asked to use the carcinogenic substances. Schuchardt GmbH goes even further with regard to some of the nitrosamines and recommends that all females under the age of 40 and all youthful persons should be excluded from work with these compounds. We try to adhere to the recommendations as much as possible, taking into consideration the frequency of the manipulations and the concentrations of the materials. More stringent precautions should definitely be taken in work with pure chemicals than with extremely dilute solutions.

We hope that manufacturers of carcinogenic chemicals will fully realize their specific responsibility, which does not only pertain to synthesis and purification, but also to shipment, and especially to packaging and labeling.

P. J. GROENEN

*Central Institute for Nutrition and Food Research TNO,
Utrechtseweg 48, Zeist, Netherlands*

Fuel Cells

Thomas Maugh's report on fuel cells (Research News, 22 Dec. 1972, p. 1273) presents an interesting review of the Pratt & Whitney Target program and its objectives. Unfortunately the claim that Pratt & Whitney aircraft is the only company actively pursuing a full-scale commercial fuel cell program is incorrect.

Exxon Enterprises, Inc., an affiliate of Exxon Corporation, and Alsthom, an affiliate of the French Compagnie Générale d'Electricité, are also engaged in a multimillion-dollar joint venture aimed at the development of commercial fuel cells. This Franco-American effort, un-

der way since 1970 at Alsthom's laboratory near Paris and at Exxon's research facilities in New Jersey, is focused on practical generators using methanol. The virtues of methanol as a clean, easily handled, commercially viable fuel which can be manufactured from coal or foreign gas supplies has recently received attention in the technical press.

The fuel cell itself is based on the pioneering thin cell concept of Alsthom's Bernard Warszawski, who showed how to pack five to ten times as much active electrode surface into the same volume as found in conventional fuel cells (1).

The Alsthom-Exxon program thus also promises to bring the fuel cell out of space into the hands of industry and the public.

C. E. HEATH

Opération Pile à Combustible Alsthom-Exxon, Laboratoire de Recherche et de Développement Alsthom, 9 Rue Ampère, 91301-Massy, France

Reference

1. B. Warszawski, *Entropie* 14, 33 (1967).

Thomas Maugh's discussion of fuel cells is restricted to their use as primary cells in which electricity is generated by electrochemical oxidation of fuels. However, the use of fuel cells or other cells as secondary batteries, that is, for storage of electric energy, was not discussed.

There is a great need for relatively cheap secondary batteries of high specific energy (watt hours per kilogram) in terms of conservation and better utilization of energy, as well as of reduction of air pollution. These aspects have been well recognized, for instance, in connection with electric cars (1). Also, the need for large energy capacity batteries in electric power substations and in other dispersed locations (in 10 to 20 megawatt blocks) has been recently emphasized (2). Even from these two examples, it is evident that research and development aimed at increasing the specific energy, decreasing the cost, and increasing the reliability and lifetime of secondary batteries is socially very relevant. Also, it is important to realize that the specific energies of present batteries are 5 to 10 times less than the theoretical values (3). Even when allowance is made for the weight of the electrolyte, cell housing, and so forth, there is still a large margin for increasing the specific energy.


The combination of great social need and inherent possibility for significant

We put a lot more into NALGENE CARBOYS

Nalgene® carboys are popular in laboratories everywhere.

Here's why:

- Only virgin, premium-grade plastics resins are used.
- Tubulations, threaded bosses and grips are integrally-molded with the rest of the carboy. Won't leak like the welded type.
- Our quick-action spigot is the most reliable and easiest to use—designed and made by Nalge.
- Tough polypropylene screw closures are leak-proof.
- Made of the right resins to stand up to chemicals and rough use.
- You have the widest choice of rectangular or round shapes in plain, tubulated or spigoted models with wide or narrow mouth in a range of sizes from 1 to 13 gal.

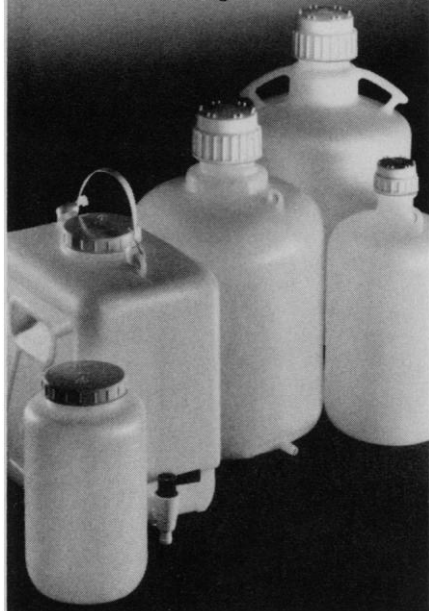

Order Nalgene carboys and large bottles from your laboratory supply dealer's catalog, or write for your 1973 Nalgene Catalog—it describes them all . . . Nalgene Labware Division, Dept. 4205A, P.O. Box 367, Rochester, New York 14602.



Nalgene® Labware . . .

the safe unbreakables—preferred by professionals.

technological and economical advances puts battery research and development in a unique position. This fact should be recognized when programs dealing with future energy R & D are formulated. A large-scale effort, with a multidisciplinary approach (electrochemistry, solid-state physics and chemistry, surface chemistry) to the solution of the pertinent problems, should be seriously considered.

AKOS G. REVESZ

COMSAT Laboratories,
Clarksburg, Maryland 20734

References

1. J. T. Salihi, *IEEE Spectrum* 9, 43 (1972).
2. Remarks by W. G. Meese on the new approach to R & D by the electric power industry; *IEEE Power Eng. Soc. Newsl.*, June 1972, p. 7.
3. E. J. Cairns and H. Shimotake, *Science* 164, 1347 (1969).

Psychological Response to Tornadoes

Sims and Baumann (30 June 1972, p. 1386) attribute the remarkably high number of tornado deaths in the South to the psychology of the population. While human response to potential danger is always a factor in survival, Sims and Baumann do not prove that response is the controlling factor in the case of tornadoes.

The sizes of the samples that are compared, 33 people in the North and 24 in the South, are unacceptably small, and the populations, exclusively female with elementary education and unknown religion, are not representative of the regions. It can be argued that the "watch the sky" Alabama approach is more prudent than watching the news on television. Pertinent questions about available safe shelters, timely warnings, and response to actual tornado sightings were not asked. Also it has not been proven that tornado victims in Alabama died without seeking shelter. The conventional refuge place, the southwest corner of a building, has been shown *not to be* the best place to survive a tornado (1).

We disagree with the statement that "no easy generalization relating housing type to tornado casualties is possible." Mehta *et al.* (2) and Reynolds (3) have shown by means of damage surveys that tornado damage and deaths can be reduced markedly by tighter building codes that require the anchoring of houses to foundations and the use of mobile-home tie-downs. Fujita (4) did not find an inverse relation between damage and structural strength,

but rather showed that these are local inhomogeneities in the tornadic wind field. The effect of open windows and impact of flying objects (perhaps from substandard houses) should also be considered.

The statement that "the most accurate measure of a tornado's ferocity is the length of its path" is an oversimplification. Fujita and Pearson (5) consider also the path width and severity of damage, and Reed (6) has shown that the average area destroyed per tornado reaches a peak in the South that is 2 to 4 times higher in Alabama than in Illinois.

The significance of Skagg's work (7) on the diurnal distribution of tornadoes appears to have been missed by the authors. In the South there is an earlier primary maximum (12 noon, local standard time) and a much flatter frequency distribution than elsewhere. Hence, there is a greater chance in the South of a nocturnal tornado striking an unaware population. Furthermore, the tornado death index as defined and used by Sims and Baumann is in fact not an index because it is expressed in units of square miles.

While the authors' statistics bear on all tornadoes, only 1.5 percent of them account for 85 percent of the deaths (8). Perhaps an analysis of the frequency of "intense" tornadoes would reveal a higher frequency for the South.

ROBERT DAVIES-JONES

JOSEPH GOLDEN

JOSEPH SCHAEFER

National Severe Storms Laboratory,
National Oceanic and Atmospheric
Administration, 1616 Halley Avenue,
Norman, Oklahoma 73069

References and Notes

1. J. R. Eagleman, *Mon. Weather Rev.* 95, 370 (1967).
2. K. C. Mehta, J. R. McDonald, J. E. Miner, A. J. Sanger, *Response of Structural Systems to the Lubbock Storm* (Texas Tech University: Storms Research Report No. 3, Lubbock, 1971).
3. G. W. Reynolds, *Bull. Amer. Meteorol. Soc.* 39, 14 (1958); G. W. Reynolds, *Proceedings, Tornado Conference* (University of Wisconsin, Milwaukee, 1970); G. W. Reynolds, *Summary Report, Conference on Wind Loads and Structures* (California Institute of Technology, Pasadena, 1970).
4. T. T. Fujita, *Weatherwise* 23, 4 (1970).
5. — and A. D. Pearson, *FPP Tornado Scale and Its Applications* (Satellite and Mesometeorology Research Project, Research Report No. 98, University of Chicago, Chicago, 1971).
6. J. W. Reed, *Preprints of the Seventh Conference on Severe Local Storms* (American Meteorological Society, Boston, Mass., 1971).
7. R. H. Skaggs, *Mon. Weather Rev.* 97, 103 (1967).
8. E. Kessler, *Bull. Amer. Meteorol. Soc.* 51, 926 (1970).
9. We wish to acknowledge Griffith Morgan for his contribution to this letter (Illinois State Water Survey, Urbana).