

With accelerator-driven thorium-uranium power plants consuming most high-level wastes, it should then be possible to handle remnant waste from nuclear electric power production with man-made containers (engineered storage) that would need to retain containment for only a few hundred years—an attractive alternative to storage of untransmuted waste for tens of thousands of years by reliance on geologic containment in deep underground repositories. We cannot be certain at this point that our technology can meet the objective of economically competitive electric power production without a long-term high-level waste stream. Therefore, worldwide programs to develop geologic storage should continue, if only to take care of existing waste. Eliminating wastes, rather than bequeathing them (no matter how well stored) to distant generations is, we believe, appealing.

The use of a subcritical system in a thorium-driven power plant would absolutely prevent a runaway chain reaction such as that which occurred at Chernobyl. A loss-of-coolant accident such as that which occurred at Three Mile Island could be prevented by passively draining the liquid fuel.

We welcome the developing interest at CERN in this field, which may in some part be the result of our many presentations to the European Community over the past 3 years. However, eliminating only actinide waste, but not fission product waste (which is the most difficult to confine by geologic storage), would not justify the development of this advanced technology. We believe the CERN group eventually will recognize the need to address the whole waste problem, and we expect that their approach will evolve toward using the same liquid fuel (molten salt) that was studied thoroughly at the Oak Ridge National Laboratory and elsewhere, and which we have adopted.

Charles D. Bowman

Los Alamos National Laboratory,
Los Alamos, NM 87545

Basic Research and Weather Prediction

The shortsightedness of current attacks on basic research (E. Marshall, "Senate turns up the heat on NSF," *News & Comment*, 17 Sept., p. 1512) is well illustrated by the National Weather Service's (NWS's) modernization program (R. A. Kerr, "Upgrade of storm warnings paying off," *Research News*, 15 Oct., p. 331). The concept and development of Doppler radars, which are at the heart of the NWS's

ongoing \$4.4-billion modernization program, and the demonstration of their utility for the detection of severe storms, were carried out by the meteorological basic research community in the 1950s through the 1980s. Now, within less than 2 years of the initial deployment of Doppler radars by the NWS, it has been shown that they greatly improve the operational forecasts of severe storms: forecasts are more accurate and there are significantly longer warning times for tornadoes.

However, in the immortal words of Al Jolson, "You ain't seen nothin' yet." Not, that is, if research into short-range weather prediction continues to be supported. The enormous quantity of high-quality data that will be provided by the NWS modernization program, when combined with a rapidly increasing understanding of weather systems and their representations by high-resolution numerical models, has the potential to provide spectacular improvements in short-range weather forecasts nationwide. A blueprint for realizing this potential has been developed by a multi-agency task force (1). Implementation of this program requires an investment of just a few percent of the cost of the NWS modernization program. The social and economic payoffs will be enormous. Let's get on with it!

Peter V. Hobbs

Department of Atmospheric Sciences,
University of Washington,
Seattle, WA 98195


References

1. *United States Weather Research Program: Implementation Plan* (Subcommittee on Atmospheric Research, Committee on Earth and Environmental Sciences, Department of Commerce, Washington, DC, in press).

Corrections and Clarifications

In the report "Carbon monoxide: A putative neural messenger" by A. Verma *et al.* (15 Jan. 1993, p. 381), the first full sentence in column 3 on page 381 should have read, "Like NO, CO is a noxious gas that activates guanylyl cyclase (8), and it has been postulated that CO, derived from heme by the action of heme oxygenase, has physiological functions (9)." Reference 9 should have referred to an article by G. S. Marks *et al.* [*Trends Pharmacol. Sci.* 12, 185 (1991)], which was erroneously included in reference 8. References 9 through 24 should have been numbered 10 through 25.

In the report "The drift of Saturn's north polar spot observed by the Hubble Space Telescope" by J. Caldwell *et al.* (16 Apr., p. 326), the revised System III rotation rate of the drift was incorrectly calculated. It should not have been "810.737° ± 0.008° per day," as stated (line 21, col. 1, p. 329), but rather "810.851° ± 0.008° per day."

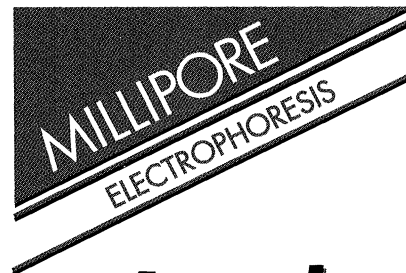

A gel that resists cracking...

Tired of your protein slab gels breaking or cracking? Try Duracryl™ acrylamide from Millipore. Its high tensile strength is double that of conventional gels, so it won't crack, break or tear – even in large format thin gels.¹

Silver-stained Duracryl gels produce monochromatic grey-black spots for superior laser scanner images – instead of the difficult to scan red-brown spots obtained with standard acrylamide gels.

For DNA sequencing, we also offer ultra high quality acrylamide stock solution (40%, 19:1 bis) with extremely low conductivity for excellent results with manual or automated sequencers.

Millipore acrylamides are made with high purity powders and Milli-Q® water, then further purified using chromatographic and membrane-based systems – techniques that Millipore knows a thing or two about.

...and a free offer that's hard to resist!

Don't just take our word for it. Try a free 100 mL bottle of Duracryl (30%, 0.8% bis) or acrylamide (40%, 19:1 bis). But call soon.

This offer expires March 31, 1994. Call 1-800-MILLIPORE or our fax on demand information retrieval system at 1-800-MILLIFX and request #1701.

MILLIPORE

Duracryl is a trademark of Millipore Corporation.
Milli-Q is a registered trademark of
Millipore Corporation

¹ *BioTechniques*, 12(4), 580 (1992)