


RB9

Service Information

Laney
POWER TO THE MUSIC
www.laney.co.uk

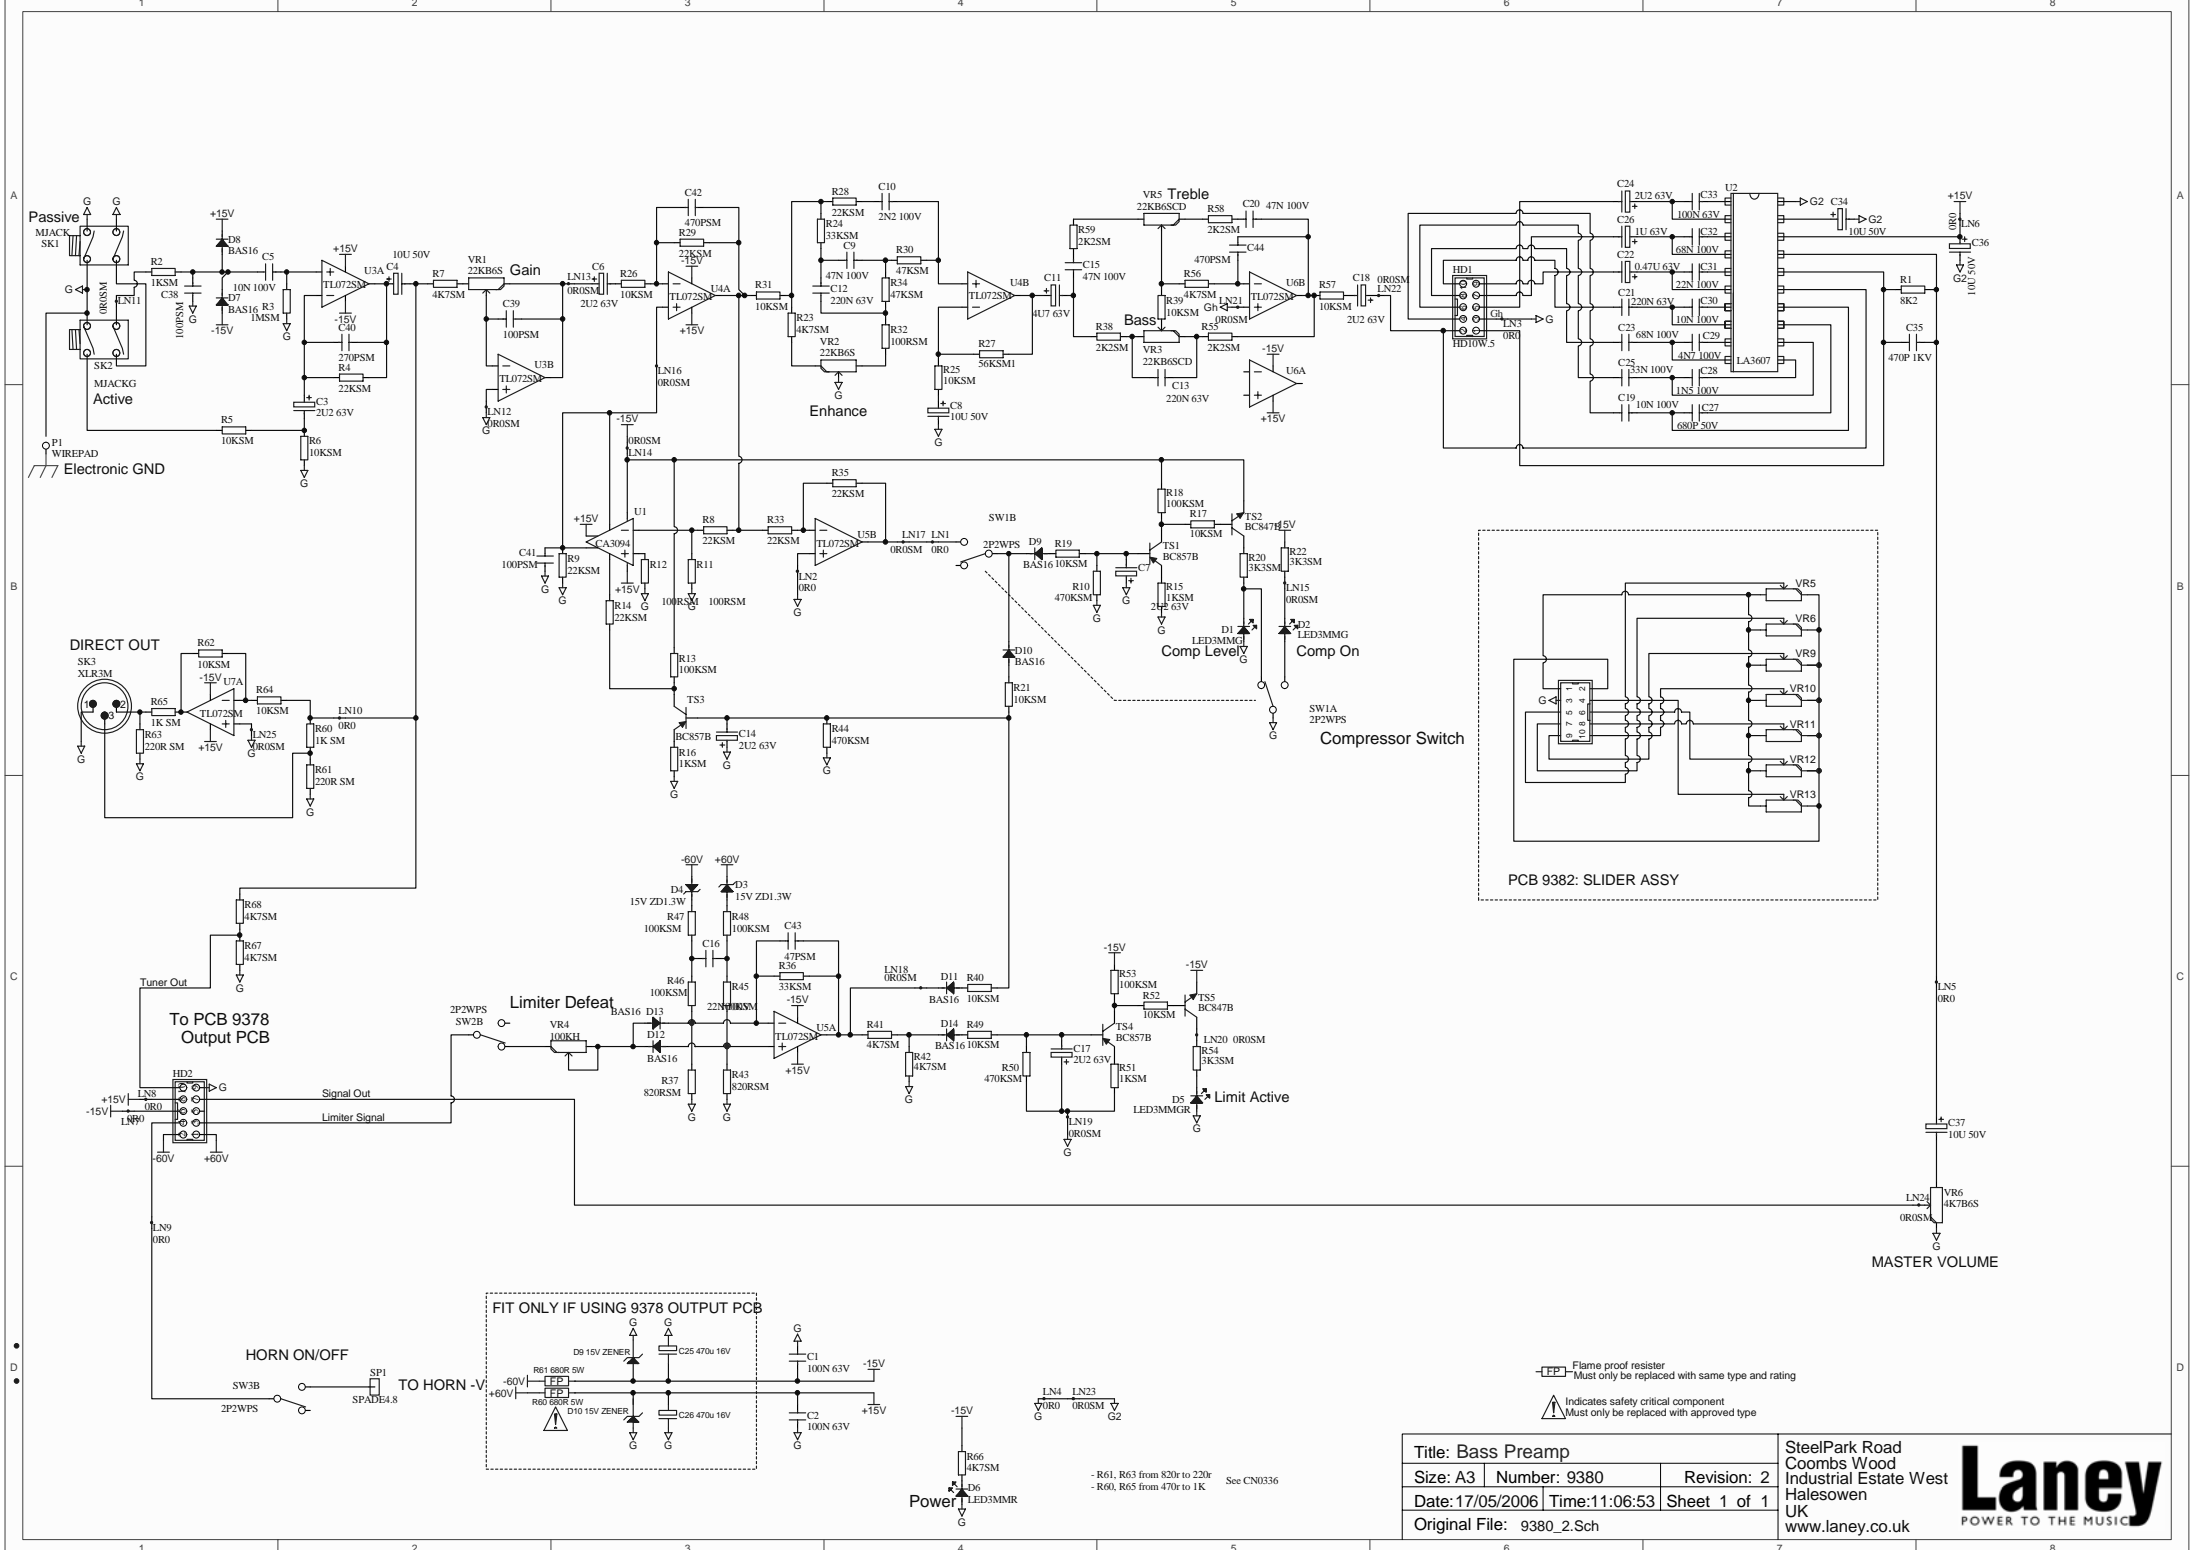


Title: Bass Preamp		
Size: A3	Number: 9380	Revision: 2
Date: 17/05/2006	Time: 11:06:53	Sheet 1 of 1
Original File: 9380_2.Sch		

SteelPark Road
Coombs Wood
Industrial Estate West
Halesowen
UK
www.laney.co.uk

Laney
POWER TO THE MUSIC

- R61, R63 from 820k to 220k
- R60, R65 from 470k to 1K
See CN0336



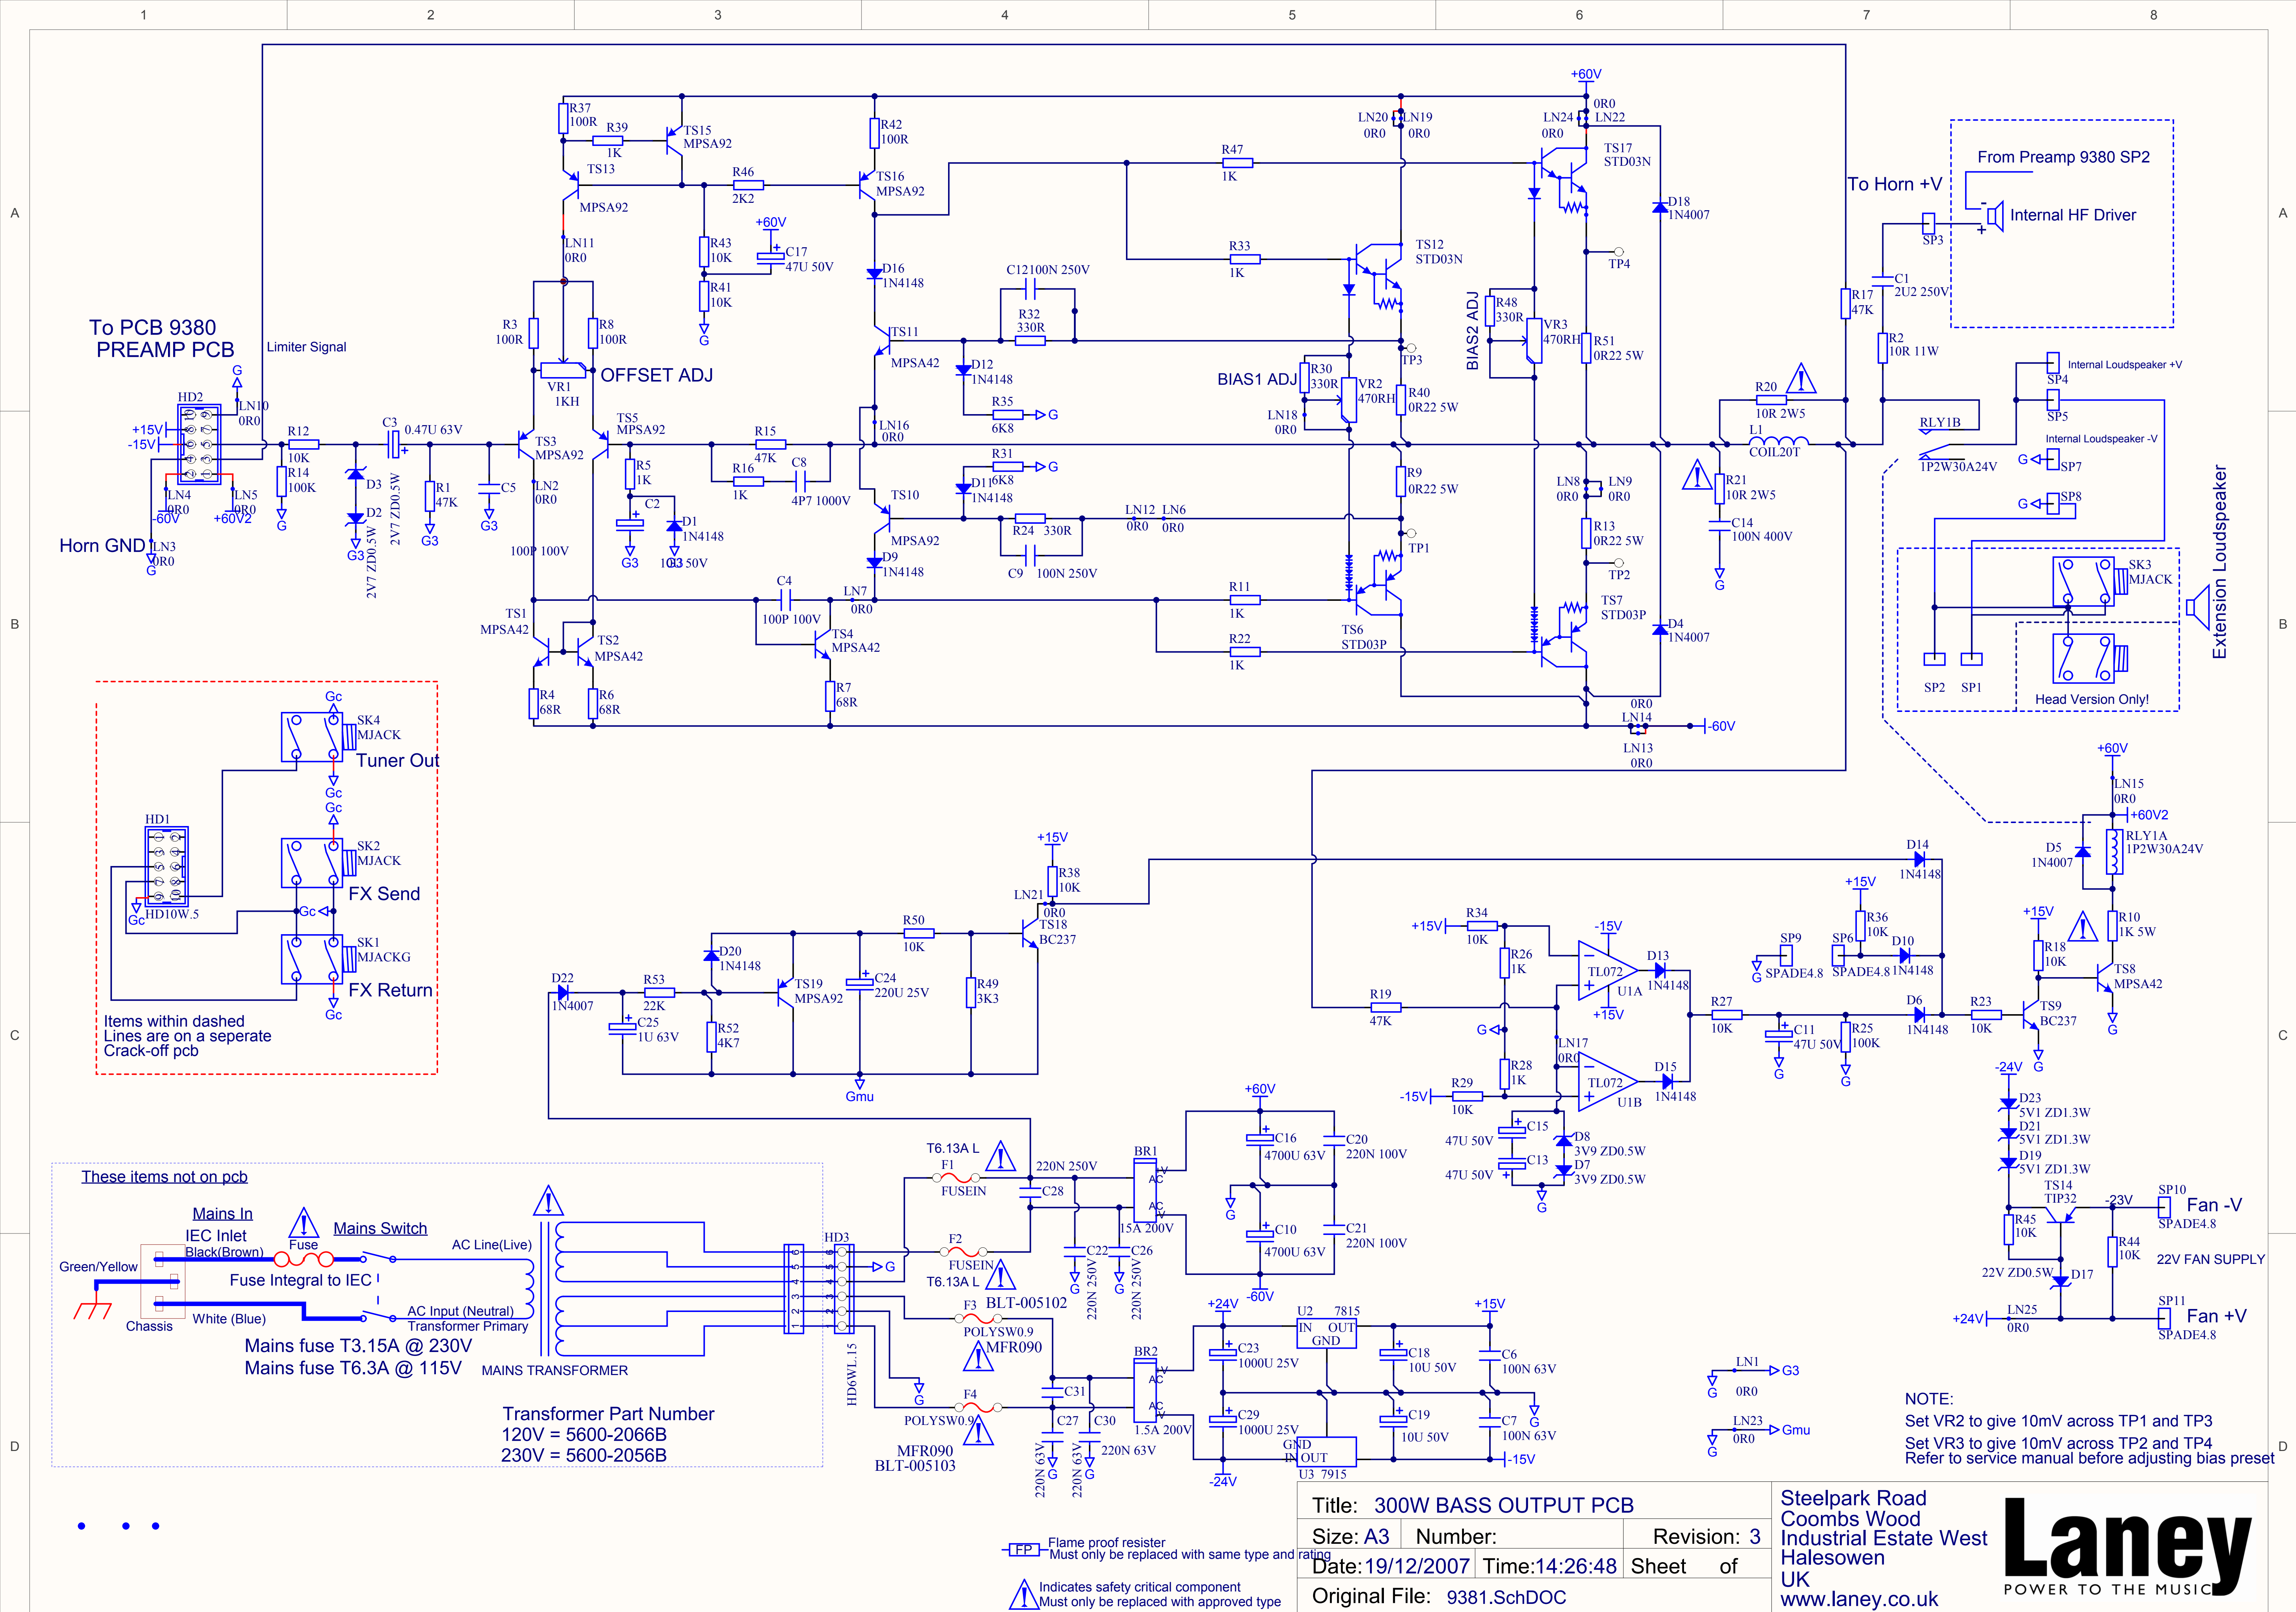

RB9 SPARE PARTS LIST

Laney

Model No.		RB9	
SPARES ITEM		DESCRIPTION	PART No.
Mains Transformer	100V	5600-2060B 300W 100V Mains Transformer	006212
	120V	5600-2057B 300W 120V Mains Transformer	006169
	230V	5600-2036B 300W 230V Mains Transformer	006198
Switch	Power	5A DPDT Rocker Switch	530027
Mains Fuse	100-120V	T6.3A 20mm Spiral Wound	005594
	220-240V	T3.15A 20mm Spiral Wound	540021
Corner	Front/Back	Black Non Hooked Type	007035
Jack Sockets		1/4 Jack Socket - Mono - Gold	005096
		1/4 Jack Socket PCB Mount	005002
PCB's	9380	Bass Pre Amp PCB Complete	007031
	Pots	VR1/2 22K Lin 6mm Spline	004061
		VR3/5 22K Lin 6mm Spline Centre Detent	004099
		VR6 4K7 Lin 6mm Spline	004072
	Switch	SW1/2 2P2W Push Switch	005017
	9381	300W Output PCB Complete	007014
	9382	Slider Assy PCB Complete	007162
Badge	1	Large Laney Badge	10056
	2	Richter Badge	007160
Control Knob		Small, Round Chrome -Deep Knurl	005650
Handle		Black Strap Handle	10100
Mains Inlet Socket		IEC Mains Inlet Socket Fused	005005
Mains Lead		Country Dependant	
Feet		Screw on Rubber Feet	10059
Cabinet		Carcass Plus Fittings RB9	007158
Output / Safety Critical Device	1	SAP15N Darlington Power (NPN) OBSOLETE	003807
	2	SAP15P Darlington Power (PNP) OBSOLETE	003808
	1	STD03N Darlington Power (NPN) Replacement for above	003817
	2	STD03P Darlington Power (PNP) Replacement for above	003818
		0R22 5% 5W Emitter Resistor (1 Reqd.for each STD Dev	007036
		If you experience difficulty fitting, contact Laney service	
	3	4700uF 63V Radial Capacitor	002006
	4	0.9A Poly Switch MFR090	005103
	5	1000uF 25V Radial Capacitor	002009
	6	10R 2W5 Resistor	001500
	7	1K 5W Resistor	001701
Direct Inj. Socket		XLR 3M 90 Deg. Socket Male	005624
Fan		24V DC 80mm Fan	007012
Manual		RB9 User Manual	007159