## INTEGRATED CIRCUITS

# DATA SHEET

## 74F456

Octal buffer/driver with parity, non-inverting (3-State)

Product specification Supersedes data of 1999 Jan 08 IC15 Data Handbook





## Octal buffer/driver with parity, non-inverting (3-State)

74F456

### **FEATURES**

- High impedance NPN base inputs for reduced loading (40μA in High and Low states)
- 74F456 combines 74F244 and 74F280A functions in one package
- 74F456 is a center pin version of the 74F656A
- Non-Inverting
- 3-State outputs sink 64mA and source 15mA
- 24-pin plastic Slim DIP (300 mil) package
- Broadside pinout simplifies PC board layout

### **DESCRIPTION**

The 74F456 is an octal buffer and line driver with parity generation/checking designed to be employed as memory address drivers, clock drivers and bus-oriented transmitters/receivers. These parts include parity generator/checker to improve PC board density.

TYPE	TYPICAL PROPAGATION DELAY	TYPICAL SUPPLY CURRENT (TOTAL)
74F456	7.5ns	64mA

### **ORDERING INFORMATION**


DESCRIPTION		PKG DWG#
24-pin plastic Slim DIP (300mil)	N74F456N	SOT222-1
24-pin plastic SOL	N74F456D	SOT137-1

### INPUT AND OUTPUT LOADING AND FAN-OUT TABLE


PINS	DESCRIPTION	74F(U.L.) HIGH/LOW	LOAD VALUE HIGH/LOW
D0-D7	Data inputs	2.0/0.066	40μΑ/40μΑ
PI	Parity input	1.0/0.033	20μΑ/20μΑ
OE0, OE1	Output Enable inputs (active Low)	1.0/0.033	20μΑ/20μΑ
ΣΕ, ΣΟ	Parity outputs	750/106.7	15mA/64mA
Q0-Q7	Data outputs	750/106.7	15mA/64mA

NOTE: One (1.0) FAST Unit Load (U.L.) is defined as 20μA in the High state and 0.6mA in the Low state.

### **PIN CONFIGURATION**

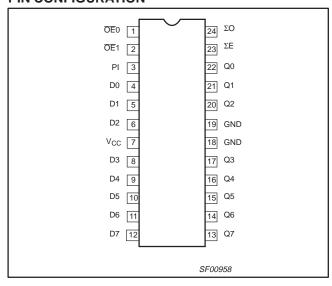


### **LOGIC SYMBOL**

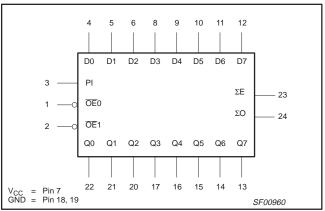

## Octal buffer/driver with parity, non-inverting (3-State)

74F456

### LOGIC SYMBOL (IEEE/IEC)

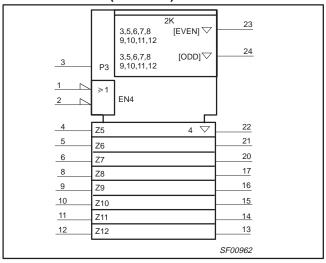

### **FUNCTION TABLE**

	OUTPUTS		
OE0	OE1	Dn	Qn
L	L	L	L
L	L	Н	Н
Н	X	Х	Z
Х	Н	Х	Z

H = High voltage level
L = Low voltage level
Z = High impedance "off" state
X = Don't care

### **FUNCTION TABLE for PARITY OUTPUTS**


INPUTS	OUTPUTS			
Number of inputs, High (PI, D0 - D7)	ΣΕ	ΣΟ		
Even - 0, 2, 4, 6, 8	Н	L		
Odd - 1, 3, 5, 7, 9	L	Н		
Any OEn = High	Z	Z		

H = High voltage level

L = Low voltage level
Z = High impedance "off" state
X = Don't care

74F456

### **LOGIC DIAGRAM**

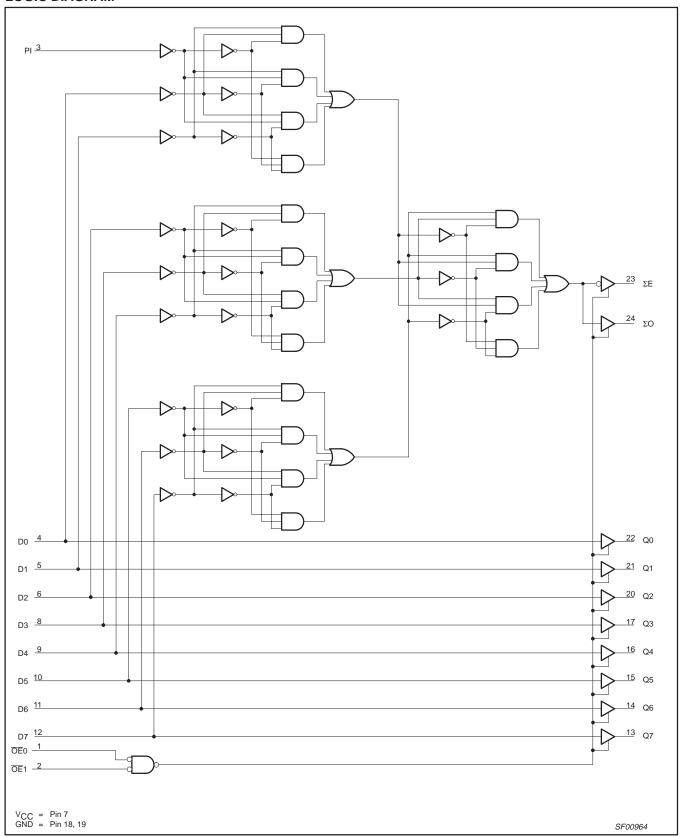

2000 Aug 01 4

## Octal buffer/driver with parity, non-inverting (3-State)

74F456

### **ABSOLUTE MAXIMUM RATINGS**

(Operation beyond the limits set forth in this table may impair the useful life of the device. Unless otherwise noted these limits are over the operating free-air temperature range.)

SYMBOL	PARAMETER	RATING	UNIT
V <sub>CC</sub>	Supply voltage	-0.5 to +7.0	V
V <sub>IN</sub>	Input voltage	-0.5 to +7.0	V
I <sub>IN</sub>	Input current	−30 to +5	mA
V <sub>OUT</sub>	Voltage applied to output in High output state	–0.5 to +V <sub>CC</sub>	V
I <sub>OUT</sub>	Current applied to output in Low output state	128	mA
T <sub>amb</sub>	Operating free-air temperature range	0 to +70	°C
T <sub>stg</sub>	Storage temperature range	-65 to +150	°C

### **RECOMMENDED OPERATING CONDITIONS**

CVMDOL	DADAMETED					
SYMBOL	PARAMETER	MIN	NOM	MAX	UNIT	
V <sub>CC</sub>	Supply voltage	4.5	5.0	5.5	V	
V <sub>IH</sub>	High-level input voltage	2.0			V	
V <sub>IL</sub>	Low-level input voltage			0.8	V	
I <sub>IK</sub>	Input clamp current			-18	mA	
I <sub>OH</sub>	High-level output current			-15	mA	
I <sub>OL</sub>	Low-level output current			64	mA	
T <sub>amb</sub>	Operating free-air temperature range	0		70	°C	

2000 Aug 01 5

## Octal buffer/driver with parity, non-inverting (3-State)

74F456

### DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

OVMDOL	DADAMETED	PARAMETER TEST CONDITIONS <sup>1</sup>					LIMITS		
SYMBOL	PARAMETER		l ies	MIN	TYP <sup>2</sup>	MAX	UNIT		
		$V_{CC} = MIN, I_{OU} = -3mA$		±10%V <sub>CC</sub>	2.4			V	
V <sub>OH</sub>	High-level output voltage		$V_{IL} = MAX$ ,	I <sub>OH</sub> =–3mA	±5%V <sub>CC</sub>	2.7	3.3		V
			$V_{IH} = MIN$	I <sub>OH</sub> =–15mA	±10%V <sub>CC</sub>	2.0			V
	l and land antenderal		$V_{CC} = MIN,$ $V_{II} = MAX,$	I MAN	±10%V <sub>CC</sub>			0.55	V
V <sub>OL</sub>	Low-level output voltage		$V_{IH} = IVIAX,$ $V_{IH} = MIN$	I <sub>OL</sub> = MAX	±5%V <sub>CC</sub>		0.42	0.55	V
V <sub>IK</sub>	Input clamp voltage	V <sub>CC</sub> = MIN, I <sub>I</sub>	$V_{CC} = MIN, I_I = I_{IK}$				-1.2	V	
I <sub>I</sub>	Input current at maximum input	Input current at maximum input voltage			V <sub>CC</sub> = 0.0V, V <sub>I</sub> = 7.0V				μΑ
L	High-level input current	Dn	\/ NAAY \	V MAY V 0.7V				40	μΑ
IH	High-lever input current	$V_{CC} = MAX, V_I = 2.7V$					20	μΑ	
L.	Low-level input current	Dn	V <sub>CC</sub> = MAX, V	/. = 0.5\/				-40	μΑ
IIL	Low-level input current	PI, <del>OE</del> n	VCC = IVIAX, V	/  = 0.5 v				-20	μΑ
I <sub>OZH</sub>	Off-state output current High-level voltage applied		V <sub>CC</sub> = MAX, V	/ <sub>O</sub> = 2.7V				50	μΑ
I <sub>OZL</sub>	Off-state output current Low-level voltage applied		V <sub>CC</sub> = MAX, V	/ <sub>O</sub> = 0.5V				-50	μΑ
I <sub>OS</sub>	Short-circuit output current <sup>3</sup>		$V_{CC} = MAX$	V <sub>CC</sub> = MAX		-100		-225	mA
		I <sub>CCH</sub>					50	80	mA
I <sub>CC</sub>	Supply current (total)	I <sub>CCL</sub>	V <sub>CC</sub> = MAX				78	110	mA
		I <sub>CCZ</sub>					63	90	mA

For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
 All typical values are at V<sub>CC</sub> = 5V, T<sub>amb</sub> = 25°C.

### **AC ELECTRICAL CHARACTERISTICS**

					LIM	ITS		
SYMBOL	PARAMETER	TEST CONDITION	l T <sub>a</sub>	/ <sub>CC</sub> = +5\ <sub>mb</sub> = +25 0pF, R <sub>L</sub> =	°C	V <sub>CC</sub> = +5 T <sub>amb</sub> = 0°C C <sub>L</sub> = 50pF,	UNIT	
			MIN	TYP	MAX	MIN	MAX	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay Dn to Qn	Waveform 1	2.0 2.5	4.5 5.0	6.5 7.0	2.0 2.5	7.0 7.5	ns
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay Dn to $\Sigma E, \Sigma O$	Waveform 1, 2	5.5 5.5	10.0 11.0	13.0 14.5	5.5 5.5	14.0 16.5	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Output Enable time to High or Low level	Waveform 3 Waveform 4	2.5 4.0	4.0 8.0	8.0 10.5	2.5 4.0	9.0 11.5	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Output Disable time from High or Low level	Waveform 3 Waveform 4	1.5 2.0	4.0 5.0	6.5 7.5	1.5 2.0	7.5 8.0	ns


Not more than one output should be shorted at a time. For testing I<sub>OS</sub>, the use of high-speed test apparatus and/or sample-and-hold techniques are preferable in order to minimize internal heating and more accurately reflect operational values. Otherwise, prolonged shorting of a High output may raise the chip temperature well above normal and thereby cause invalid readings in other parameter tests. In any sequence of parameter tests, I<sub>OS</sub> tests should be performed last.

## Octal buffer/driver with parity, non-inverting (3-State)


74F456

### **AC WAVEFORMS**


For all waveforms,  $V_M = 1.5V$ .

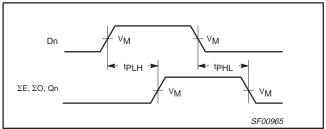


Waveform 1. Propagation Delay, Non-Inverting Outputs

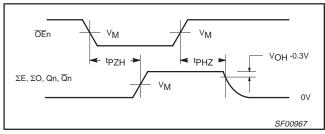

Waveform 3. 3-State Output Enable Time to High Level and Output Disable Time from High Level

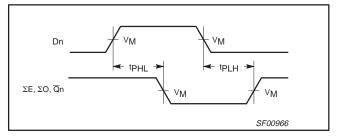


Waveform 2. Propagation Delay, Inverting Outputs

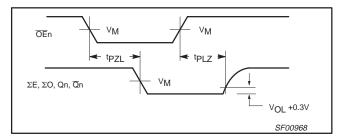

Waveform 4. 3-State Output Enable Time to Low Level and Output Disable Time from Low Level

### **TEST CIRCUIT AND WAVEFORMS**

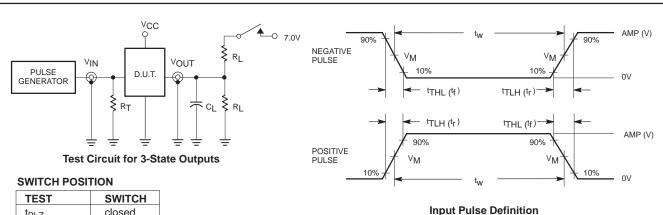

TEST	SWITCH
t <sub>PLZ</sub>	closed
t <sub>PZL</sub>	closed
All other	open

### **DEFINITIONS:**

R<sub>L</sub> = Load resistor;

see AC electrical characteristics for value.  $C_L = Load$  capacitance includes jig and probe capacitance;

see AC electrical characteristics for value.

RT = Termination resistance should be equal to Z<sub>OUT</sub> of pulse generators.

family	INP	UT PU	LSE REQU	IREMEN	TS	
family	amplitude	V <sub>M</sub>	rep. rate	t <sub>w</sub>	t <sub>TLH</sub>	t <sub>THL</sub>
74F	3.0V 1.5V		1MHz	500ns	2.5ns	2.5ns

SF00777


2000 Aug 01 7


## Octal buffer/driver with parity, non-inverting (3-State)

74F456

### DIP24: plastic dual in-line package; 24 leads (300 mil)

SOT222-1

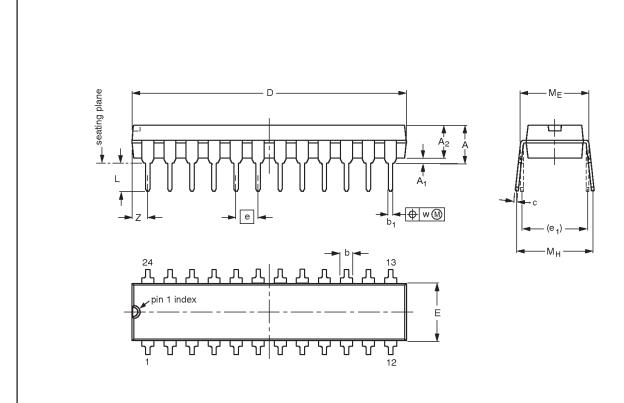



### DIMENSIONS (millimetre dimensions are derived from the original inch dimensions)

UNIT	A max.	A <sub>1</sub> min.	A <sub>2</sub> max.	b	b <sub>1</sub>	С	D <sup>(1)</sup>	E <sup>(1)</sup>	e	e <sub>1</sub>	L	ME	Мн	w	Z <sup>(1)</sup> max.
mm	4.70	0.38	3.94	1.63 1.14	0.56 0.43	0.36 0.25	31.9 31.5	6.73 6.48	2.54	7.62	3.51 3.05	8.13 7.62	10.03 7.62	0.25	2.05
inches	0.185	0.015	0.155	0.064 0.045	0.022 0.017	0.014 0.010	1.256 1.240	0.265 0.255	0.100	0.300	0.138 0.120	0.32 0.30	0.395 0.300	0.01	0.081

### Note

1. Plastic or metal protrusions of 0.01 inches maximum per side are not included.


OUTLINE		REFER	EUROPEAN	ISSUE DATE		
VERSION	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE
SOT222-1		MS-001AF				95-03-11

## Octal buffer/driver with parity, non-inverting (3-State)

74F456

### SO24: plastic small outline package; 24 leads; body width 7.5 mm

SOT137-1

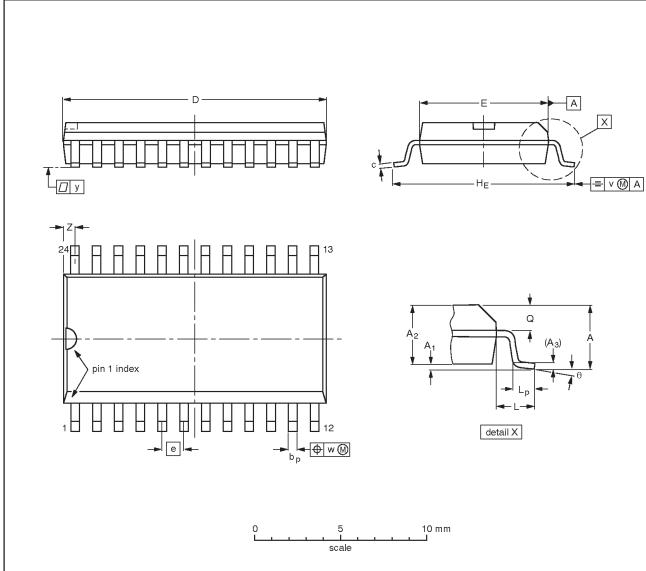

### DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A <sub>1</sub>	A <sub>2</sub>	А3	bр	С	D <sup>(1)</sup>	E <sup>(1)</sup>	е	HE	L	Lp	Q	v	w	у	z <sup>(1)</sup>	θ
mm	2.65	0.30 0.10	2.45 2.25	0.25	0.49 0.36	0.32 0.23	15.6 15.2	7.6 7.4	1.27	10.65 10.00	1.4	1.1 0.4	1.1 1.0	0.25	0.25	0.1	0.9 0.4	8°
inches	0.10	0.012 0.004	0.096 0.089	0.01	0.019 0.014	0.013 0.009	0.61 0.60	0.30 0.29	0.050	0.419 0.394	0.055	0.043 0.016	0.043 0.039	0.01	0.01	0.004	0.035 0.016	0°

### Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

OUTLINE		REFER	RENCES	EUROPEAN	ISSUE DATE		
VERSION	IEC	JEDEC	EIAJ	PROJECTION	ISSUE DATE		
SOT137-1	075E05	MS-013AD			<del>-95-01-24</del> 97-05-22		

## Octal buffer/driver with parity, non-inverting (3-State)

74F456

### Data sheet status

Data sheet status	Product status	Definition [1]
Objective specification	Development	This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.
Preliminary specification	Qualification	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

<sup>[1]</sup> Please consult the most recently issued datasheet before initiating or completing a design.

### **Definitions**

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

### **Disclaimers**

**Life support** — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors 811 East Arques Avenue P.O. Box 3409 Sunnyvale, California 94088–3409 Telephone 800-234-7381 © Copyright Philips Electronics North America Corporation 2000 All rights reserved. Printed in U.S.A.

Date of release: 08-00

Document order number: 9397-750 -07378

Let's make things better.

Philips Semiconductors



