


Silicon PIN Diode

BA 585

- Current-controlled RF resistor for switching and attenuating applications.
- Frequency range 1 MHz ... 2 GHz

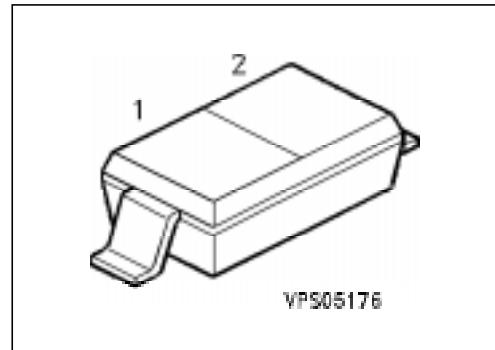

Type	Marking	Ordering Code (tape and reel)	Pin Configuration	Package ¹⁾
BA 585	white R	Q62702-A859		SOD-123

Maximum Ratings

Parameter	Symbol	Values	Unit
Reverse voltage	V_R	50	V
Forward current	I_F	50	mA
Operation temperature range	T_{op}	- 55 ... + 125	°C
Storage temperature range	T_{stg}	- 55 ... + 150	

Thermal Resistance


Junction - ambient	$R_{th JA}$	≤ 450	K/W
--------------------	-------------	------------	-----

¹⁾ For detailed information see chapter Package Outlines.

Electrical Characteristicsat $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Forward voltage $I_F = 50 \text{ mA}$	V_F	—	—	1.1	V
Reverse current $V_R = 30 \text{ V}$	I_R	—	—	50	nA
Diode capacitance $f = 1 \text{ MHz}, V_R = 10 \text{ V}$ $f = 100 \text{ MHz}, V_R = 0 \text{ V}$	C_T	— —	0.28 0.23	0.6 0.4	pF
Forward resistance $f = 100 \text{ MHz}$ $I_F = 1.5 \text{ mA}$ $I_F = 10 \text{ mA}$	r_f	— —	22 5	40 7	Ω
Zero bias conductance $f = 100 \text{ MHz}, V_R = 0 \text{ V}$	g_p	—	70	—	μS
Series inductance	L_s	—	2.8	—	nH

Diode capacitance $C_T = f(V_R)$
 $f = 1 \text{ MHz} / f = 100 \text{ MHz}$

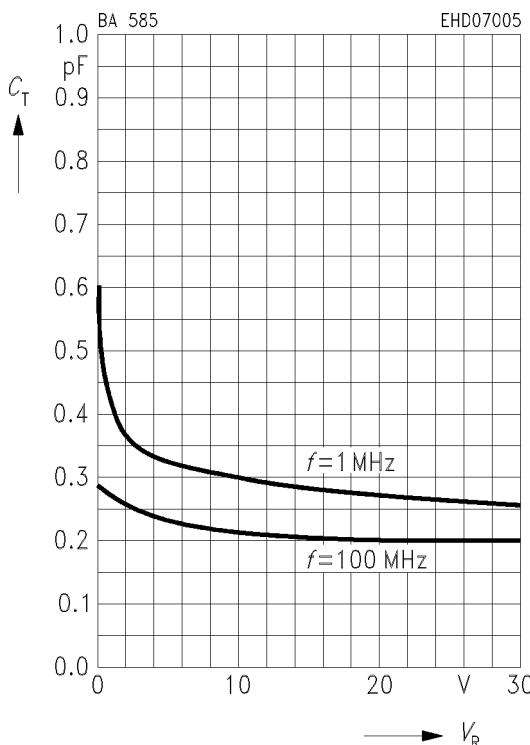

Forward resistance $r_f = f(I_F)$
 $f = 100 \text{ MHz}$

