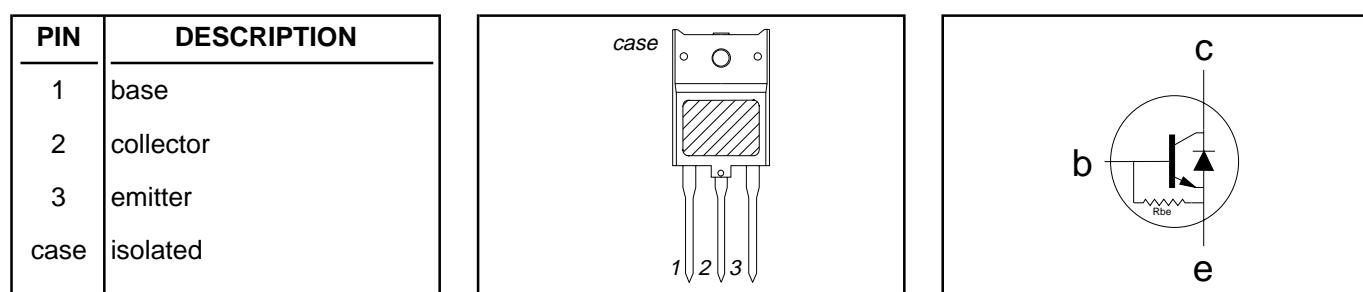


**Silicon Diffused Power Transistor****BU2725DX****GENERAL DESCRIPTION**

High voltage, high-speed switching npn transistor in a plastic full-pack envelope intended for use in horizontal deflection circuits of colour television receivers. Designed to withstand  $V_{CES}$  pulses up to 1700V.

**QUICK REFERENCE DATA**

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$V_{CESM}$	Collector-emitter voltage peak value	$V_{BE} = 0 \text{ V}$	-	1700	V
$I_C$	Collector current (DC)		-	12	A
$I_{CM}$	Collector current peak value		-	30	A
$P_{tot}$	Total power dissipation	$T_{hs} \leq 25 \text{ }^\circ\text{C}$	-	45	W
$V_{CEsat}$	Collector-emitter saturation voltage	$I_C = 7.0 \text{ A}; I_B = 1.75 \text{ A}$	-	1.0	V
$I_{Csat}$	Collector saturation current	$f = 16 \text{ kHz}$	7.0	-	A
$t_s$	Storage time	$I_{Csat} = 7.0 \text{ A}; f = 16 \text{ kHz}$	1.5	2	$\mu\text{s}$

**PINNING - SOT399****PIN CONFIGURATION****SYMBOL****LIMITING VALUES**

Limiting values in accordance with the Absolute Maximum Rating System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{CESM}$	Collector-emitter voltage peak value	$V_{BE} = 0 \text{ V}$	-	1700	V
$I_C$	Collector current (DC)		-	12	A
$I_{CM}$	Collector current peak value		-	30	A
$I_B$	Base current (DC)		-	12	A
$I_{BM}$	Base current peak value		-	20	A
$-I_{B(AV)}$	Reverse base current	average over any 20 ms period	-	200	mA
$-I_{BM}$	Reverse base current peak value <sup>1</sup>		-	9	A
$P_{tot}$	Total power dissipation	$T_{hs} \leq 25 \text{ }^\circ\text{C}$	-	45	W
$T_{stg}$	Storage temperature		-65	150	$^\circ\text{C}$
$T_j$	Junction temperature		-	150	$^\circ\text{C}$

**ESD LIMITING VALUES**

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_c$	Electrostatic discharge capacitor voltage	Human body model (250 pF, 1.5 k $\Omega$ )	-	10	kV

<sup>1</sup> Turn-off current.

## Silicon Diffused Power Transistor

BU2725DX

**THERMAL RESISTANCES**

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$R_{th\ j-hs}$	Junction to heatsink	without heatsink compound	-	3.7	K/W
$R_{th\ j-hs}$	Junction to heatsink	with heatsink compound	-	2.8	K/W
$R_{th\ j-a}$	Junction to ambient	in free air	35	-	K/W

**ISOLATION LIMITING VALUE & CHARACTERISTIC** $T_{hs} = 25^\circ C$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{isol}$	Repetitive peak voltage from all three terminals to external heatsink	R.H. $\leq 65\%$ ; clean and dustfree	-		2500	V
$C_{isol}$	Capacitance from T2 to external heatsink	$f = 1\text{ MHz}$	-	22	-	pF

**STATIC CHARACTERISTICS** $T_{hs} = 25^\circ C$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$I_{CES}$	Collector cut-off current <sup>2</sup>	$V_{BE} = 0\text{ V}; V_{CE} = V_{CESMmax}$	-	-	1.0	mA
$I_{CES}$		$V_{BE} = 0\text{ V}; V_{CE} = V_{CESMmax}$	-	-	2.0	mA
$I_{EBO}$	Emitter cut-off current	$T_j = 125^\circ C$	-	110	-	mA
$B_{VEBO}$	Emitter-base breakdown voltage	$V_{EB} = 7.5\text{ V}; I_C = 0\text{ A}$	7.5	13.5	-	V
$R_{EB}$	Base-emitter resistance	$I_B = 1\text{ mA}$		70	-	$\Omega$
$V_{CESat}$	Collector-emitter saturation voltage	$V_{EB} = 7.5\text{ V}$	-	-	1.0	V
$V_{BEsat}$	Base-emitter saturation voltage	$I_C = 7.0\text{ A}; I_B = 1.75\text{ A}$	0.78	0.86	0.95	V
$V_F$	Diode forward voltage	$I_C = 7.0\text{ A}; I_B = 1.75\text{ A}$		1.4	2.2	V
$h_{FE}$	DC current gain	$I_F = 7\text{ A}$	-	19	-	V
$h_{FE}$		$I_C = 1\text{ A}; V_{CE} = 5\text{ V}$	3.8	5.8	7.8	
		$I_C = 7\text{ A}; V_{CE} = 1\text{ V}$				

**DYNAMIC CHARACTERISTICS** $T_{hs} = 25^\circ C$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$t_s$	Switching times (16 kHz line deflection circuit)	$I_{Csat} = 7.0\text{ A}; L_C = 650\text{ }\mu\text{H}; C_{fb} = 18\text{ nF}; V_{CC} = 162\text{ V}; I_{B(end)} = 1.3\text{ A}; L_B = 2\text{ }\mu\text{H}; -V_{BB} = 4\text{ V};$			
$t_f$	Turn-off storage time Turn-off fall time		1.5 0.14	2 0.3	$\mu\text{s}$

<sup>2</sup> Measured with half sine-wave voltage (curve tracer).

## Silicon Diffused Power Transistor

BU2725DX

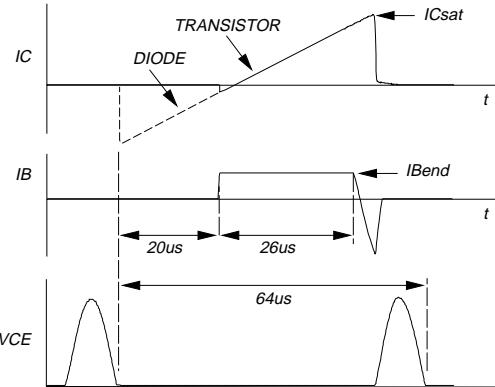


Fig.1. Switching times waveforms (16 kHz).

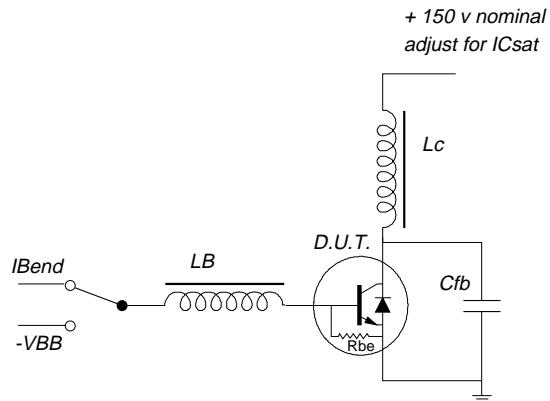


Fig.3. Switching times test circuit.






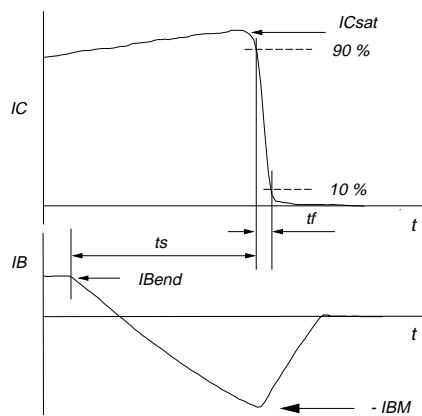


Fig.2. Switching times definitions.

Fig.4. DC current gain.  $h_{FE} = f (I_C)$   
Parameter  $T_{hs}$   
(Low and high gain)

## Silicon Diffused Power Transistor

BU2725DX

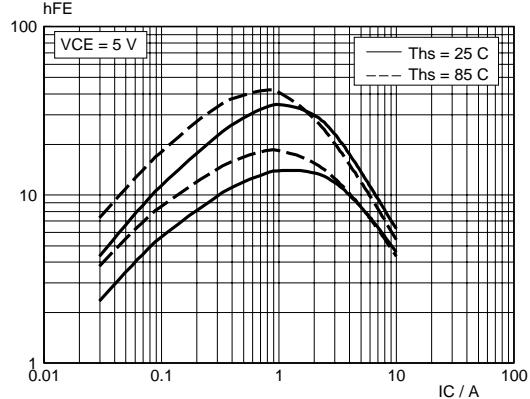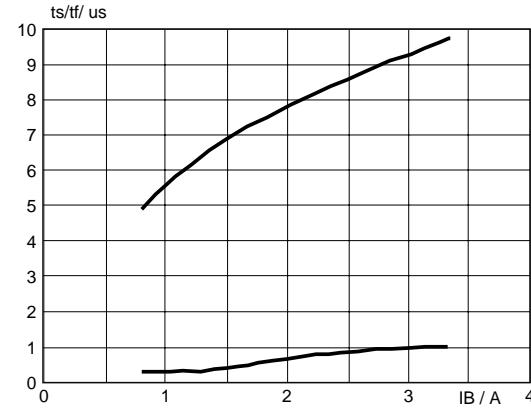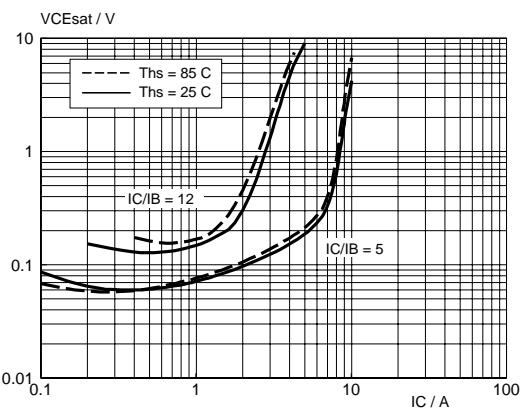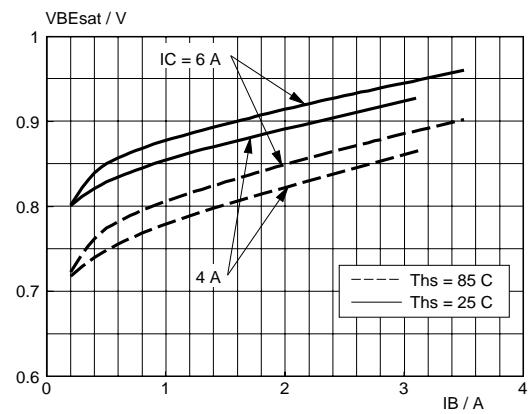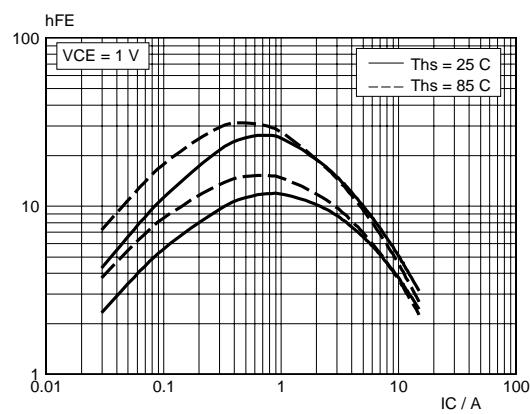

## Silicon Diffused Power Transistor

BU2725DX

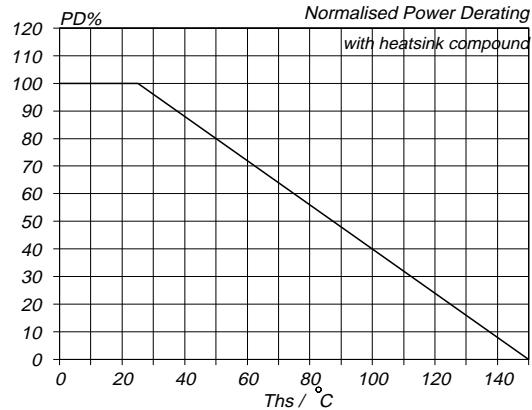


Fig.9. Normalised power dissipation.  
 $PD\% = 100 \cdot PD/PD \text{ at } 25^\circ \text{C} = f(T_{hs})$

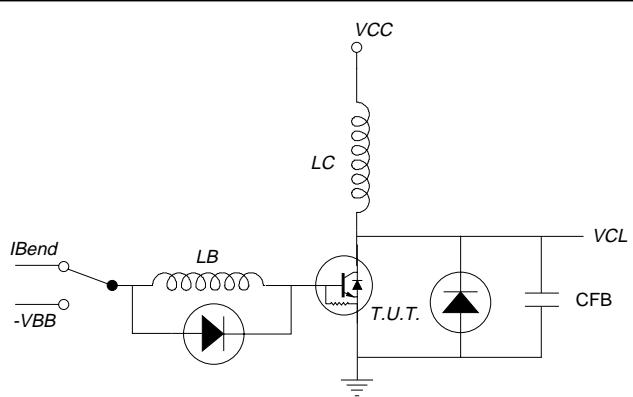


Fig.11. Test Circuit RBSOA.  
 $V_{CC} = 150 \text{ V}$ ;  $-V_{BB} = 1 - 4 \text{ V}$ ;  
 $L_C = 1 \text{ mH}$ ;  $V_{CL} = 1500 \text{ V}$ ;  $L_B = 0.5 - 2 \mu\text{H}$ ;  
 $C_{FB} = 1 - 3 \text{ nF}$ ;  $I_{B(\text{end})} = 0.8 - 4 \text{ A}$

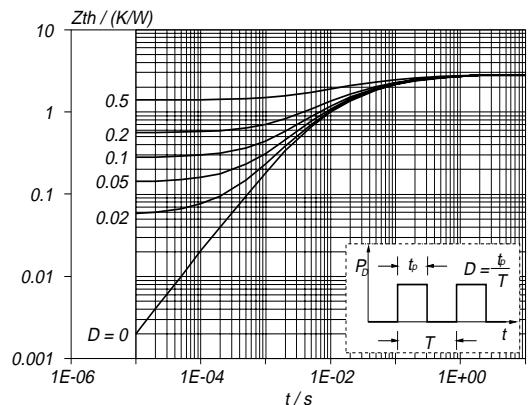


Fig.10. Transient thermal impedance.  
 $Z_{th(j-hs)} = f(t)$ ; parameter  $D = t_p/T$

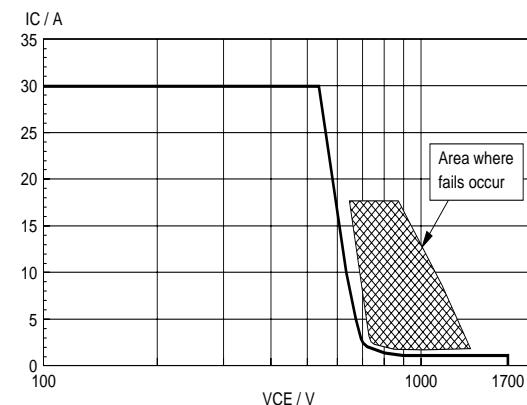


Fig.12. Reverse bias safe operating area.  $T_j \leq T_{j\max}$

## Silicon Diffused Power Transistor

BU2725DX

**MECHANICAL DATA***Dimensions in mm*

Net Mass: 5.88 g

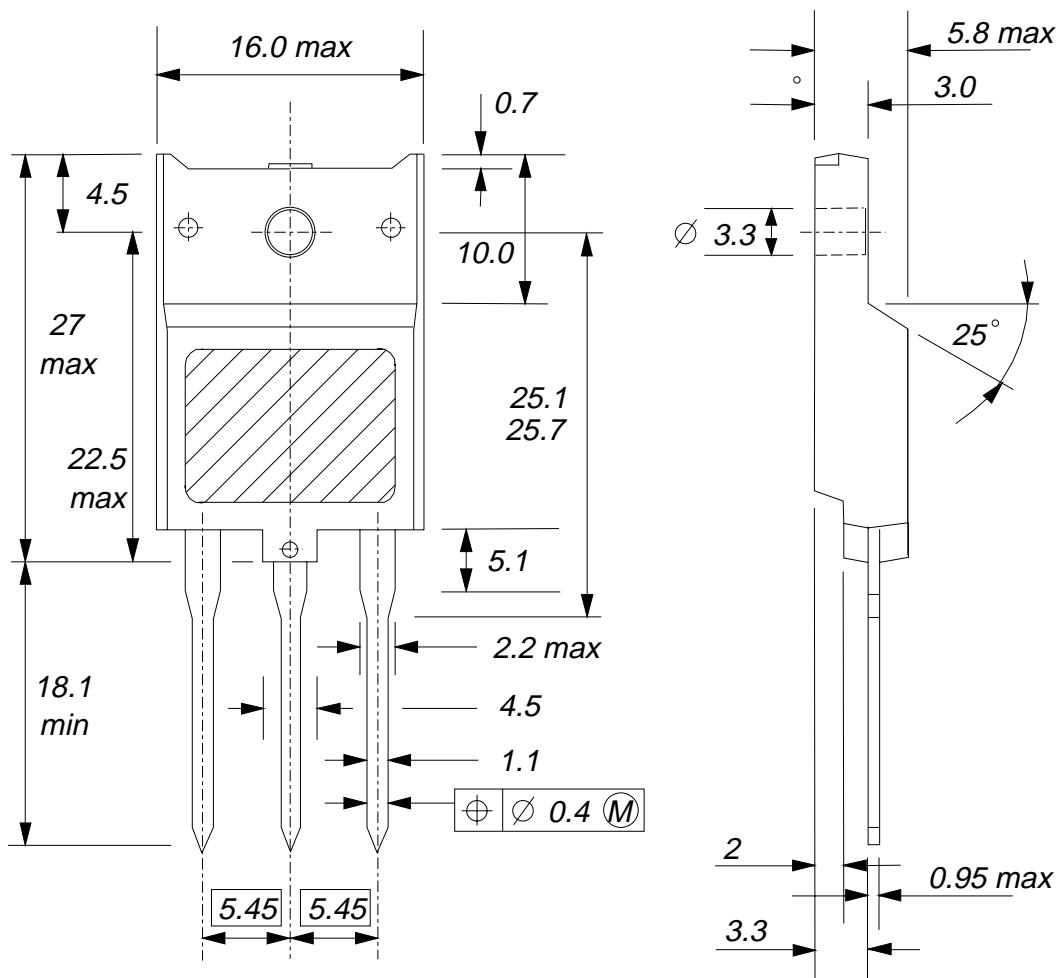


Fig.13. SOT399; The seating plane is electrically isolated from all terminals.

**Notes**

1. Refer to mounting instructions for F-pack envelopes.
2. Epoxy meets UL94 V0 at 1/8".

**Silicon Diffused Power Transistor****BU2725DX****DEFINITIONS**

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	
<b>© Philips Electronics N.V. 1997</b>	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

**LIFE SUPPORT APPLICATIONS**

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.