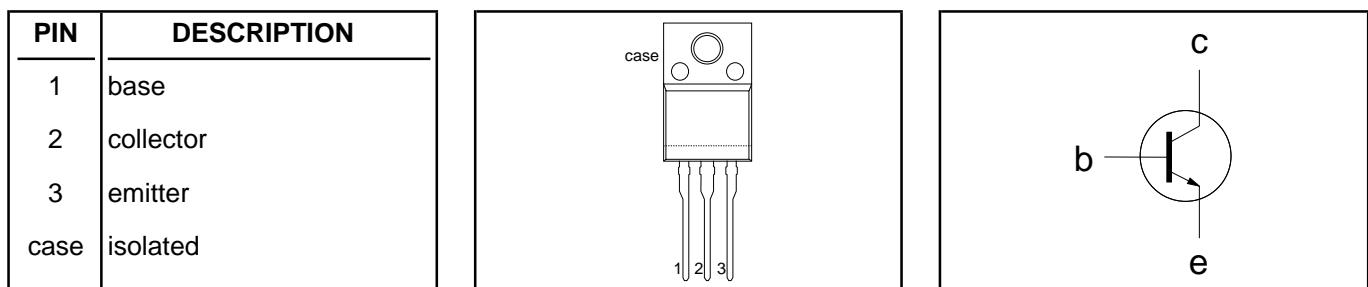


Silicon Diffused Power Transistor**BUJ303AX****GENERAL DESCRIPTION**

High-voltage, high-speed planar-passivated npn power switching transistor in a plastic full-pack envelope intended for use in high frequency electronic lighting ballast applications, converters, inverters, switching regulators, motor control systems, etc.

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
V_{CESM}	Collector-emitter voltage peak value	$V_{BE} = 0 \text{ V}$	-	1000	V
V_{CBO}	Collector-Base voltage (open emitter)		-	1000	V
V_{CEO}	Collector-emitter voltage (open base)		-	500	V
I_C	Collector current (DC)		-	5	A
I_{CM}	Collector current peak value		-	10	A
P_{tot}	Total power dissipation	$T_{hs} \leq 25 \text{ }^\circ\text{C}$	-	32	W
V_{CEsat}	Collector-emitter saturation voltage	$I_C = 3 \text{ A}; I_B = 0.6 \text{ A}$	0.25	1.5	V
h_{FEsat}	DC current gain	$I_C = 3 \text{ A}; V_{CE} = 5 \text{ V}$	12	-	
t_f	Fall time	$I_C=2.5\text{A}, I_{B1}=0.5\text{A}$	145	160	ns

PINNING - SOT186A**PIN CONFIGURATION****SYMBOL****LIMITING VALUES**

Limiting values in accordance with the Absolute Maximum Rating System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CESM}	Collector to emitter voltage	$V_{BE} = 0 \text{ V}$	-	1000	V
V_{CEO}	Collector to emitter voltage (open base)		-	500	V
V_{CBO}	Collector to base voltage (open emitter)		-	1000	V
I_C	Collector current (DC)		-	5	A
I_{CM}	Collector current peak value		-	10	A
I_B	Base current (DC)		-	2	A
I_{BM}	Base current peak value		-	4	A
P_{tot}	Total power dissipation	$T_{hs} \leq 25 \text{ }^\circ\text{C}$	-	32	W
T_{stg}	Storage temperature		-65	150	$^\circ\text{C}$
T_j	Junction temperature		-	150	$^\circ\text{C}$

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
R_{thj-hs}	Junction to heatsink	with heatsink compound	-	3.95	K/W
R_{thj-a}	Junction to ambient	in free air	55	-	K/W

Silicon Diffused Power Transistor

BUJ303AX

ISOLATION LIMITING VALUE & CHARACTERISTIC $T_{hs} = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{isol}	R.M.S. isolation voltage from all three terminals to external heatsink	$f = 50-60 \text{ Hz}$; sinusoidal waveform; $R.H. \leq 65\%$; clean and dustfree	-		2500	V
C_{isol}	Capacitance from T2 to external heatsink	$f = 1 \text{ MHz}$	-	10	-	pF

STATIC CHARACTERISTICS $T_{hs} = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CES}	Collector cut-off current ¹	$V_{BE} = 0 \text{ V}$; $V_{CE} = V_{CESMmax}$	-	-	1.0	mA
I_{CES}		$V_{BE} = 0 \text{ V}$; $V_{CE} = V_{CESMmax}$; $T_j = 125^\circ\text{C}$	-	-	2.0	mA
I_{CBO}	Collector cut-off current ¹	$V_{CBO} = V_{CESMmax}$ (1000V)	-	-	0.1	mA
I_{CEO}		$V_{CEO} = V_{CEOMmax}$ (500V)	-	-	0.1	mA
I_{EBO}	Emitter cut-off current	$V_{EB} = 9 \text{ V}$; $I_c = 0 \text{ A}$	-	-	0.1	mA
V_{CEO}	Collector-emitter sustaining voltage	$I_B = 0 \text{ A}$; $I_c = 100 \text{ mA}$; $L = 25 \text{ mH}$	500	-	-	V
V_{CESat}	Collector-emitter saturation voltages	$I_c = 3 \text{ A}$; $I_B = 0.6 \text{ A}$	-	0.25	1.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_c = 3 \text{ A}$; $I_B = 0.6 \text{ A}$	-	0.97	1.3	V
h_{FE}	DC current gain	$I_c = 5 \text{ mA}$; $V_{CE} = 5 \text{ V}$	10	22	35	
h_{FE}		$I_c = 500 \text{ mA}$; $V_{CE} = 5 \text{ V}$	14	25	35	
h_{FEsat}	DC current gain	$I_c = 2.5 \text{ A}$; $V_{CE} = 5 \text{ V}$	10	13.5	17	
		$I_c = 3 \text{ A}$; $V_{CE} = 5 \text{ V}$	-	12	-	

DYNAMIC CHARACTERISTICS $T_{hs} = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
t_{on}	Switching times (resistive load)	$I_{Con} = 2.5 \text{ A}$; $I_{Bon} = -I_{Boff} = 0.5 \text{ A}$; $R_L = 75 \text{ ohms}$; $V_{BB2} = 4 \text{ V}$			
t_s	Turn-on time		0.5	0.7	μs
t_f	Turn-off storage time		3.3	4	μs
	Turn-off fall time		0.33	0.45	μs
t_s	Switching times (inductive load)	$I_{Con} = 2.5 \text{ A}$; $I_{Bon} = 0.5 \text{ A}$; $L_B = 1 \mu\text{H}$; $-V_{BB} = 5 \text{ V}$			
t_f	Turn-off storage time		1.4	1.6	μs
	Turn-off fall time		145	160	ns
t_s	Switching times (inductive load)	$I_{Con} = 2.5 \text{ A}$; $I_{Bon} = 0.5 \text{ A}$; $L_B = 1 \mu\text{H}$; $-V_{BB} = 5 \text{ V}$; $T_j = 100^\circ\text{C}$			
t_f	Turn-off storage time		1.7	1.9	μs
	Turn-off fall time		160	200	ns

¹ Measured with half sine-wave voltage (curve tracer).

Silicon Diffused Power Transistor

BUJ303AX

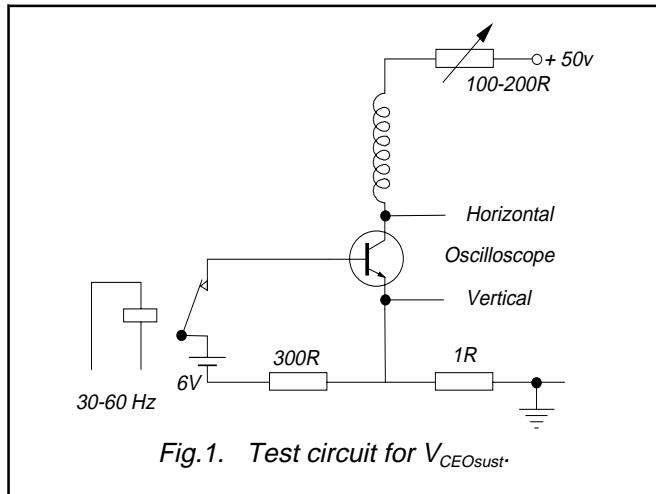
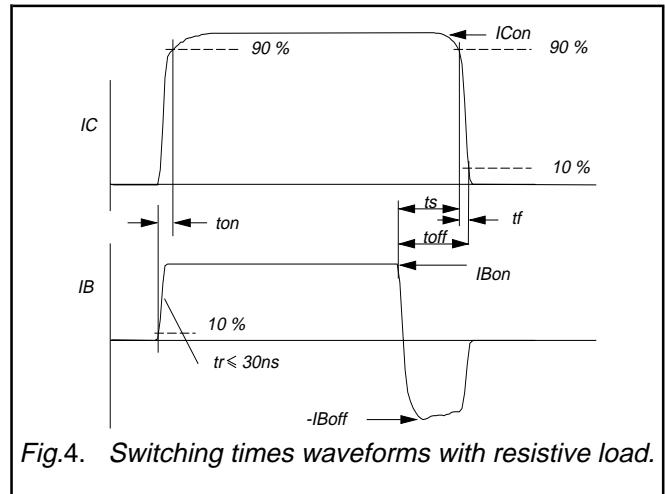
Fig.1. Test circuit for V_{CEO} sust.

Fig.4. Switching times waveforms with resistive load.

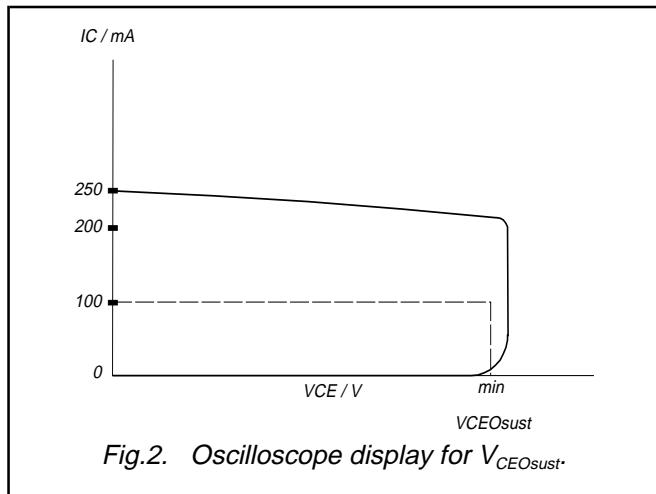
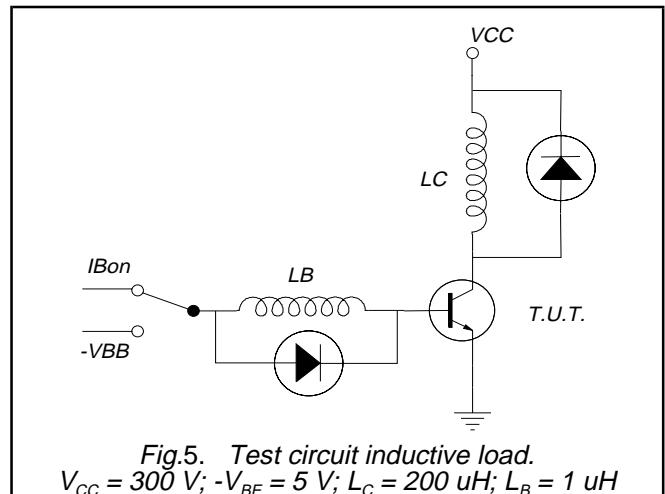
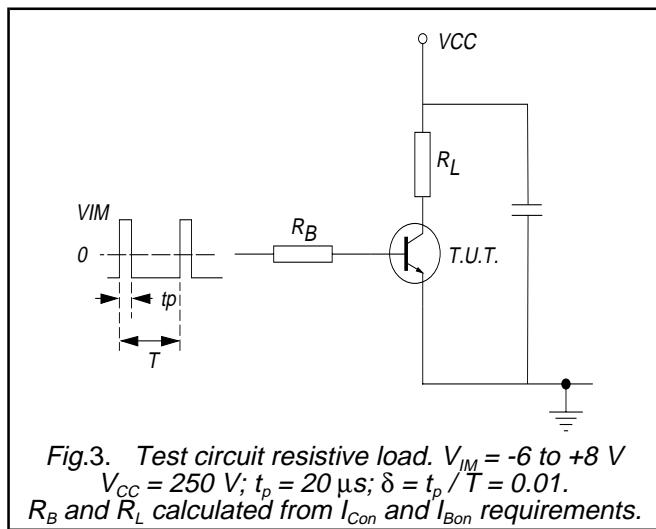
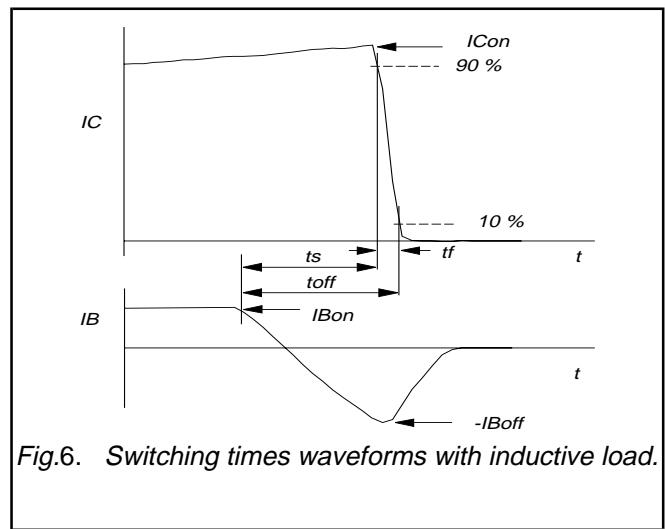
Fig.2. Oscilloscope display for V_{CEO} sust.Fig.5. Test circuit inductive load.
 $V_{CC} = 300\text{ V}$; $-V_{BE} = 5\text{ V}$; $L_C = 200\text{ }\mu\text{H}$; $L_B = 1\text{ }\mu\text{H}$ Fig.3. Test circuit resistive load. $V_{IM} = -6$ to $+8\text{ V}$
 $V_{CC} = 250\text{ V}$; $t_p = 20\text{ }\mu\text{s}$; $\delta = t_p/T = 0.01$.
 R_B and R_L calculated from I_{Con} and I_{Bon} requirements.

Fig.6. Switching times waveforms with inductive load.

Silicon Diffused Power Transistor

BUJ303AX

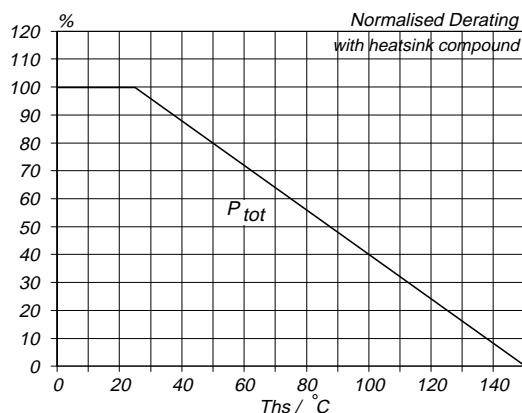


Fig.7. Normalised power dissipation.
 $PD\% = 100 \cdot PD/PD_{25^\circ C} = f(T_{hs})$

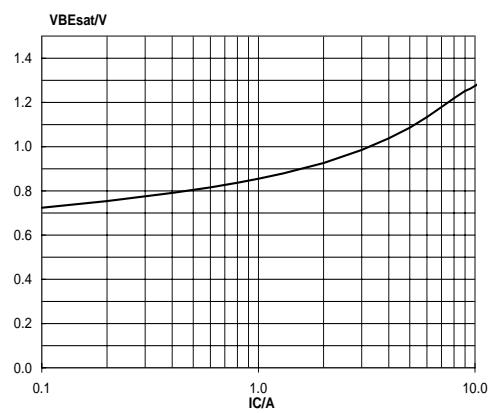


Fig.10. Base-Emitter saturation voltage.
Solid lines = typ values, $V_{BEsat} = f(IC)$; at $IC/IB = 4$.

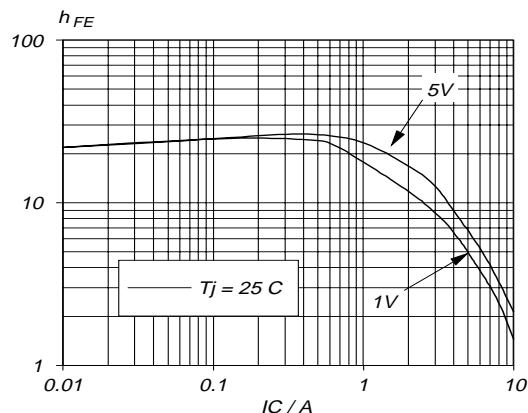


Fig.8. Typical DC current gain. $h_{FE} = f(I_C)$
parameter V_{CE}

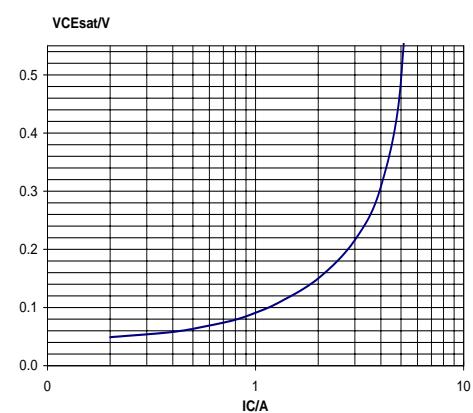


Fig.11. Collector-Emitter saturation voltage.
Solid lines = typ values, $V_{CEsat} = f(IC)$; at $IC/IB = 4$.

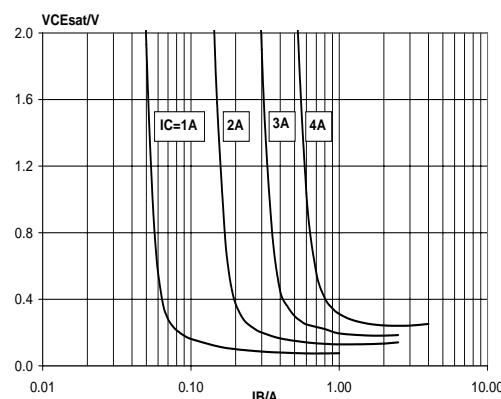


Fig.9. Collector-Emitter saturation voltage.
Solid lines = typ values, $V_{CEsat} = f(IB)$; $T_j=25^\circ C$.

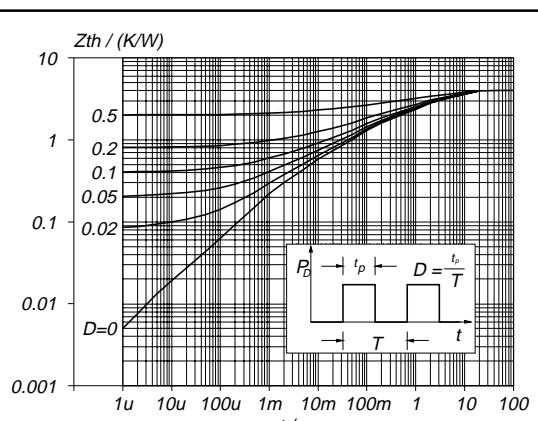


Fig.12. Transient thermal impedance.
 $Z_{thj-hs} = f(t)$; parameter $D = t_p/T$

Silicon Diffused Power Transistor

BUJ303AX

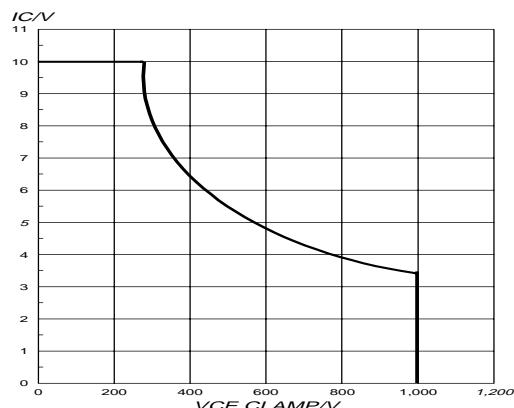
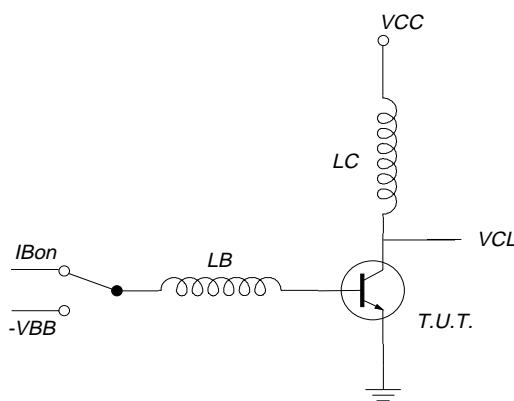
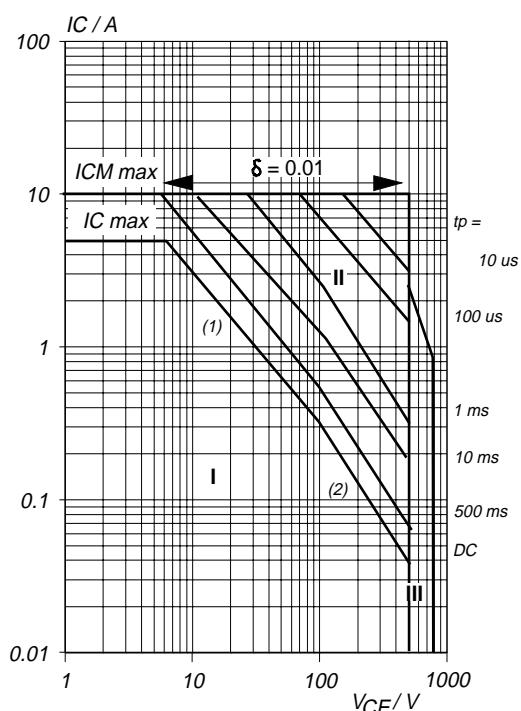
Fig.13. Reverse bias safe operating area. $T_j \leq T_{j\ max}$ 

Fig.14. Test circuit for reverse bias safe operating area.
 $V_{cl} \leq 1000V$; $V_{cc} = 150V$; $V_{BB} = -5V$; $L_B = 1\mu H$;
 $L_c = 200\mu H$

Fig.15. Forward bias safe operating area. $T_{hs} \leq 25^\circ C$

- (1) $P_{tot\ max}$ and $P_{tot\ peak\ max}$ lines.
- (2) Second breakdown limits.
- I Region of permissible DC operation.
- II Extension for repetitive pulse operation.
- III Extension during turn-on in single transistor converters provided that $R_{BE} \leq 100\ \Omega$ and $t_p \leq 0.6\ \mu s$.
- NB: Mounted with heatsink compound and 30 ± 5 newton force on the centre of the envelope.

Silicon Diffused Power Transistor

BUJ303AX

MECHANICAL DATA

Dimensions in mm

Net Mass: 2 g

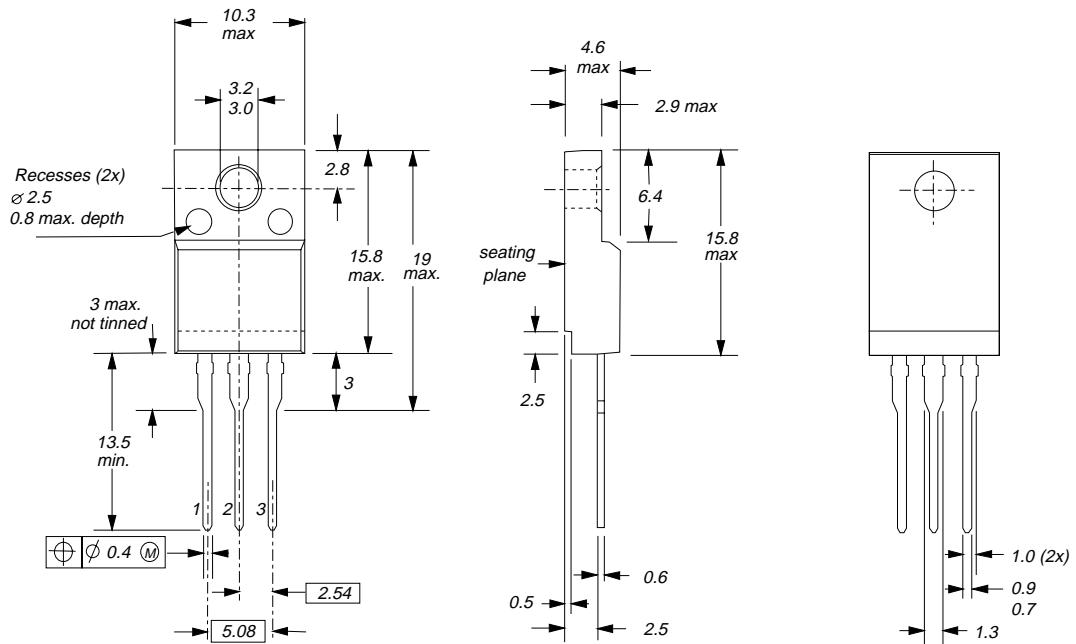


Fig. 16. SOT186A; The seating plane is electrically isolated from all terminals.

Notes

1. Refer to mounting instructions for F-pack envelopes.
2. Epoxy meets UL94 V0 at 1/8".

Silicon Diffused Power Transistor**BUJ303AX****DEFINITIONS**

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	
© Philips Electronics N.V. 1998	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.