
### DISCRETE SEMICONDUCTORS

## DATA SHEET



# **BY328**Damper diode

Product specification Supersedes data of May 1996 File under Discrete Semiconductors, SC01 1996 Sep 30





Damper diode BY328

#### **FEATURES**

- · Glass passivated
- High maximum operating temperature
- · Low leakage current
- · Excellent stability
- · Available in ammo-pack
- Also available with preformed leads for easy insertion.


#### **APPLICATIONS**

 Damper diode in high frequency horizontal deflection circuits up to 38 kHz.

#### **DESCRIPTION**

Rugged glass package, using a high temperature alloyed construction.

This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

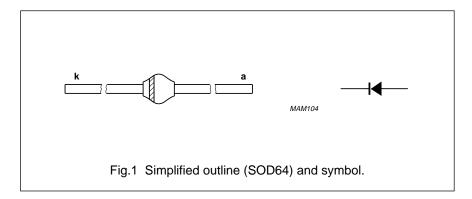

#### **LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V <sub>RSM</sub>	non-repetitive peak reverse voltage		_	1500	V
V <sub>RRM</sub>	repetitive peak reverse voltage		_	1500	V
V <sub>R</sub>	continuous reverse voltage		_	1400	V
I <sub>FWM</sub>	working peak forward current	T <sub>tp</sub> = 55 °C; lead length = 10 mm see Fig.2	_	6.0	А
		T <sub>amb</sub> = 55 °C; PCB mounting (see Fig.5); see Fig.2	_	4.7	А
		T <sub>amb</sub> = 55 °C; PCB mounting (see Fig.4); see Fig 2	_	3.0	А
I <sub>FRM</sub>	repetitive peak forward current		_	10	Α
I <sub>FSM</sub>	non-repetitive peak forward current	t = 10 ms half sinewave; $T_j = T_{j \text{ max}}$ prior to surge; $V_R = V_{RRMmax}$	_	60	A
T <sub>stg</sub>	storage temperature		<b>−65</b>	+175	°C
Tj	junction temperature		-65	+150	°C

Damper diode BY328

#### **ELECTRICAL CHARACTERISTICS**

 $T_j = 25$  °C; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
V <sub>F</sub>	forward voltage	$I_F = 5 \text{ A}; T_j = T_{j \text{ max}}; \text{ see Fig.3}$	1.35	V
		I <sub>F</sub> = 5 A; see Fig.3	1.45	V
I <sub>R</sub>	reverse current	V <sub>R</sub> = V <sub>Rmax</sub> ; T <sub>j</sub> = 150 °C	150	μΑ
t <sub>rr</sub>	reverse recovery time	when switched from $I_F$ = 0.5 A to $I_R$ = 1 A; measured at $I_R$ = 0.25 A; see Fig.6	500	ns
t <sub>fr</sub>	forward recovery time	when switched to $I_F = 5$ A in 50 ns; $T_j = T_{j \text{ max}}$ ; see Fig.7	500	ns

#### THERMAL CHARACTERISTICS


SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R <sub>th j-tp</sub>	thermal resistance from junction to tie-point	lead length = 10 mm	25	K/W
R <sub>th j-a</sub>	thermal resistance from junction to ambient	note 1	75	K/W
		mounted as shown in Fig.5	40	K/W

#### Note

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer ≥40 μm, see Fig.4. For more information please refer to the *"General Part of Handbook SC01"*.

Damper diode BY328

#### **GRAPHICAL DATA**

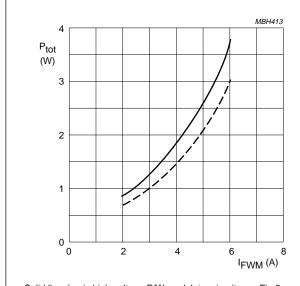


Solid line: basic high-voltage E/W modulator circuit; see Fig.8.

Dotted line: basic conventional horizontal deflection circuit; see Fig.9.


Curves include power dissipation due to switching losses.

Fig.2 Maximum total power dissipation as a function of working peak forward current.



Dotted line:  $T_j = 150 \,^{\circ}\text{C}$ ; solid line:  $T_j = 25 \,^{\circ}\text{C}$ .

Fig.3 Forward current as a function of forward voltage; maximum values.

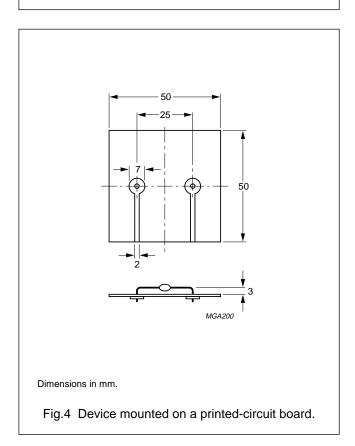



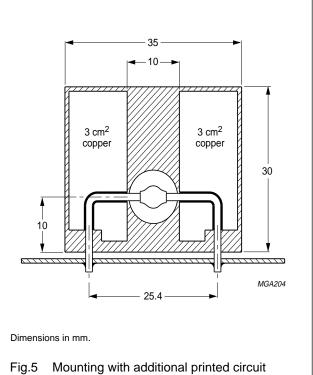


Fig.5 Mounting with additional printed circuit board for heat sink purposes.

1996 Sep 30

Damper diode BY328

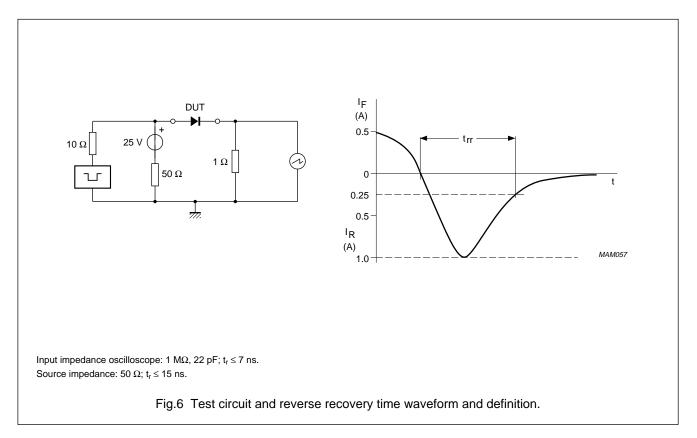

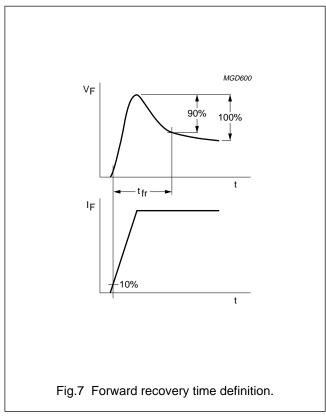


Damper diode BY328


#### APPLICATION INFORMATION


For horizontal deflection circuits, two basic applications are shown in Figs 8 and 9.

The maximum allowable total power dissipation for the diode can be calculated from the thermal resistance  $R_{th j-a}$  and the difference between  $T_{j max}$  and  $T_{amb max}$  in the application. The maximum  $I_{FWM}$  can then be taken from Fig.2.

The basic application waveforms in Fig.10 relate to the circuit in Fig.8. In the circuit in Fig.9 the forward conduction time of the diode is shorter, allowing a higher I<sub>FWM</sub> (see Fig.2).

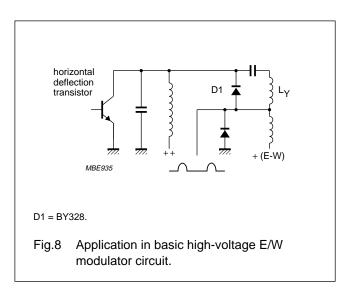




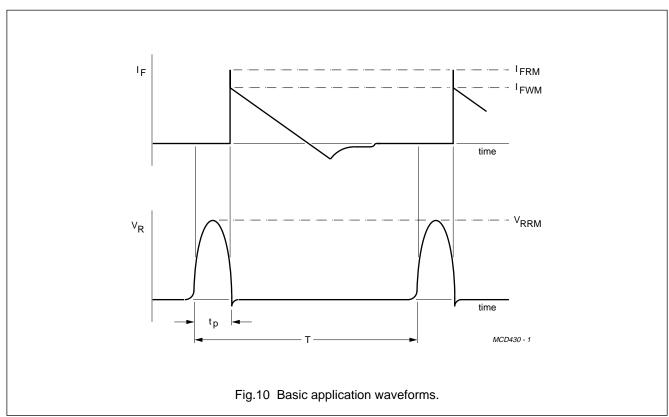

Damper diode BY328

#### **PACKAGE OUTLINE**

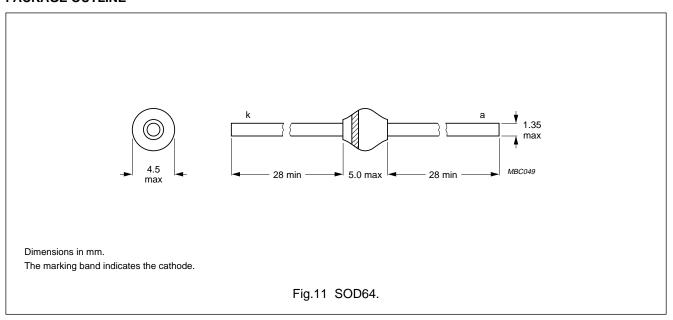

#### **DEFINITIONS**

Data Sheet Status		
Objective specification	This data sheet contains target or goal specifications for product development.	
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.	
Product specification	This data sheet contains final product specifications.	
Limiting values		

Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

#### **Application information**

Where application information is given, it is advisory and does not form part of the specification.

#### LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.