

GSCC-7.007BS

BATTERY SAVER

Туре	V _i	Vo	lo
GSCC-7.007BS	10,5 to 16,0V	6,75 V	700 mA


DESCRIPTION

The GSCC-7.007BS is a switch mode constant current battery saver for 5 cell NiCd or NiMH batteries. The input energy is supplied by the car cigar lighter plug and the battery is charged by 0.7A constant current.

Two versions of the INPUT PLUG ADAPTOR are available:

WASHER TIP VERSION: GSCC-7.007BS-E (Ordering Number)

SPRING-LOADED TIP VERSION: GSCC-7.007BS-A (Ordering Number) (See page 2 for mechanical data)




ELECTRICAL CHARACTERISTICS (T_{amb} = 25°C unless otherwise specified)


Symbol	Parameter	Test Conditions	Min	Тур	Max	Unit
Vi	Input Voltage	I ₀ = 0.7A Vbatt = 5 to 6.75V	10.5		16.0	V
lo	Output Charge Current	V _i = 10.5V to 16V Vbatt = 5.0 to 6.75V	650	700	750	mA
Vo	Output Limiting Voltage	Vi = 10.5 to 16V	6.5	6.75	7.00	V
Тор	Operating Ambient Temperature Range		- 20		+70	°C
Tstg	Storage Temperature Range		- 25		+85	°C

June 1994 1/3

CONNECTION DIAGRAM AND MECHANICAL DATA

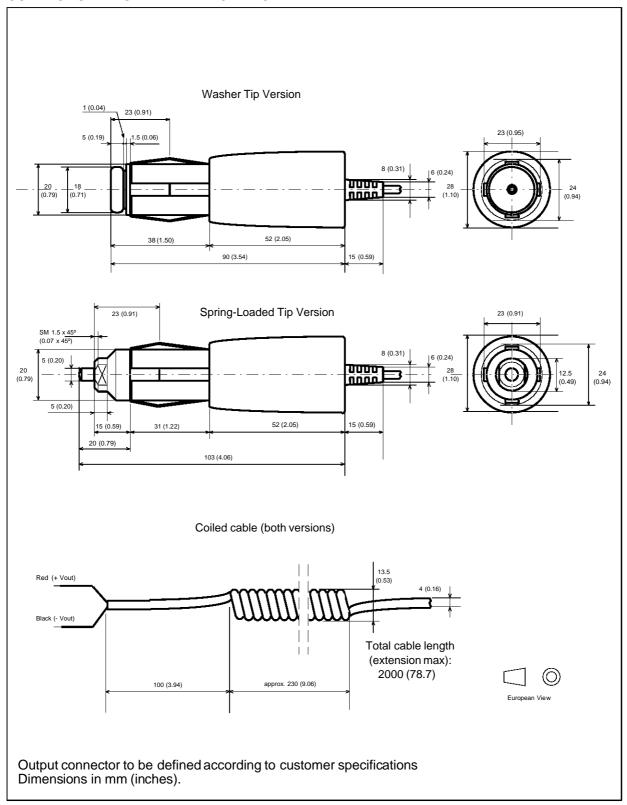

CHARGE CHARACTERISTICS

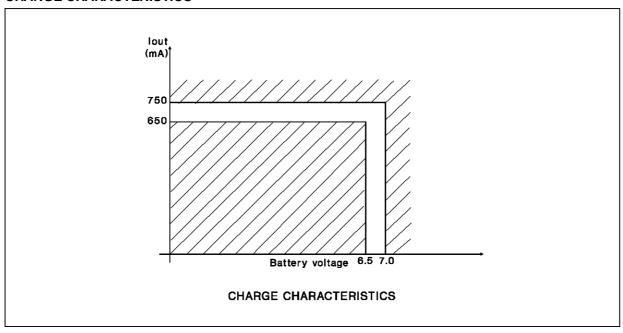

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

