


## TrenchMOS™ transistor Logic level FET

**PHP42N03LT, PHB42N03LT**

### FEATURES

- 'Trench' technology
- Very low on-state resistance
- Fast switching
- Stable off-state characteristics
- High thermal cycling performance
- Low thermal resistance

### SYMBOL



### QUICK REFERENCE DATA

$V_{DSS} = 30 \text{ V}$

$I_D = 42 \text{ A}$

$R_{DS(ON)} \leq 26 \text{ m}\Omega (V_{GS} = 5 \text{ V})$

$R_{DS(ON)} \leq 23 \text{ m}\Omega (V_{GS} = 10 \text{ V})$

### GENERAL DESCRIPTION

N-channel enhancement mode logic level field-effect power transistor in a plastic envelope using 'trench' technology. The device has very low on-state resistance. It is intended for use in dc to dc converters and general purpose switching applications.


The PHP42N03LT is supplied in the SOT78 (TO220AB) conventional leaded package.

The PHB42N03LT is supplied in the SOT404 surface mounting package.


### PINNING

PIN	DESCRIPTION
1	gate
2	drain <sup>1</sup>
3	source
tab	drain

### SOT78 (TO220AB)

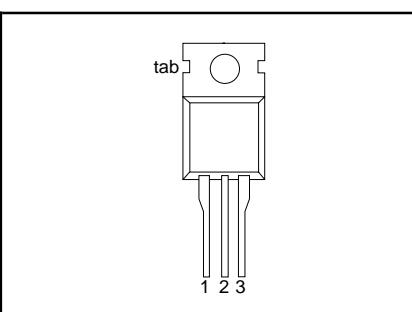

### SOT404

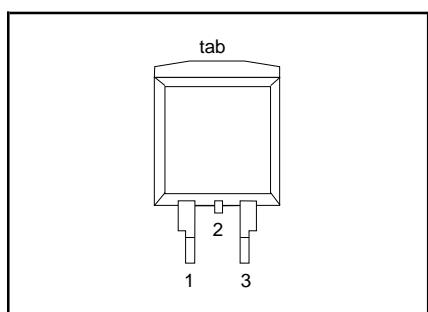

### LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{DSS}$	Drain-source voltage	$T_j = 25 \text{ }^\circ\text{C to } 175 \text{ }^\circ\text{C}$	-	30	V
$V_{DGR}$	Drain-gate voltage	$T_j = 25 \text{ }^\circ\text{C to } 175 \text{ }^\circ\text{C}; R_{GS} = 20 \text{ k}\Omega$	-	30	V
$V_{GS}$	Gate-source voltage		-	$\pm 15$	V
$I_D$	Continuous drain current	$T_{mb} = 25 \text{ }^\circ\text{C}; V_{GS} = 5 \text{ V}$	-	42	A
		$T_{mb} = 100 \text{ }^\circ\text{C}; V_{GS} = 5 \text{ V}$	-	30	A
$I_{DM}$	Pulsed drain current	$T_{mb} = 25 \text{ }^\circ\text{C}$	-	168	A
$P_D$	Total power dissipation	$T_{mb} = 25 \text{ }^\circ\text{C}$	-	86	W
$T_j, T_{stg}$	Operating junction and storage temperature	$T_{mb} = 25 \text{ }^\circ\text{C}$	-55	175	$^\circ\text{C}$

TrenchMOS™ transistor  
Logic level FET

PHP42N03LT, PHB42N03LT

### THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th\ j\text{-mb}}$	Thermal resistance junction to mounting base		-	-	1.75	K/W
$R_{th\ j\text{-a}}$	Thermal resistance junction to ambient	SOT78 package, in free air SOT404 package, pcb mounted, minimum footprint	-	60 50	- -	K/W K/W

### ELECTRICAL CHARACTERISTICS

$T_j = 25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(\text{BR})\text{DSS}}$	Drain-source breakdown voltage	$V_{GS} = 0 \text{ V}; I_D = 0.25 \text{ mA}; T_j = -55^\circ\text{C}$	30	-	-	V
$V_{GS(\text{TO})}$	Gate threshold voltage	$V_{DS} = V_{GS}; I_D = 1 \text{ mA}$ $T_j = 175^\circ\text{C}$	27 1 0.5	- 1.5 -	2	V
$R_{DS(\text{ON})}$	Drain-source on-state resistance	$V_{GS} = 10 \text{ V}; I_D = 25 \text{ A}$ $V_{GS} = 5 \text{ V}; I_D = 25 \text{ A}$ $V_{GS} = 5 \text{ V}; I_D = 25 \text{ A}; T_j = 175^\circ\text{C}$	- - -	16 20 48	23 26 mΩ	mΩ
$g_{fs}$ $I_{DSS}$	Forward transconductance Zero gate voltage drain current	$V_{DS} = 25 \text{ V}; I_D = 25 \text{ A}$ $V_{DS} = 30 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 175^\circ\text{C}$	8	27 0.05	- 10	S μA
$I_{GSS}$	Gate source leakage current	$V_{GS} = \pm 5 \text{ V}; V_{DS} = 0 \text{ V}$	-	-	500 100	μA nA
$Q_{g(\text{tot})}$ $Q_{gs}$ $Q_{gd}$	Total gate charge Gate-source charge Gate-drain (Miller) charge	$I_D = 20 \text{ A}; V_{DD} = 24 \text{ V}; V_{GS} = 10 \text{ V}$	- - -	40 7 10	-	nC nC nC
$t_{d\ on}$ $t_r$ $t_{d\ off}$ $t_f$	Turn-on delay time Turn-on rise time Turn-off delay time Turn-off fall time	$V_{DD} = 15 \text{ V}; I_D = 25 \text{ A}; V_{GS} = 5 \text{ V}; R_G = 5 \Omega$ Resistive load	- - - -	12 80 35 31	20 130 60 45	ns ns ns ns
$L_d$ $L_d$	Internal drain inductance Internal drain inductance	Measured tab to centre of die Measured from drain lead to centre of die (SOT78 package only)	- -	3.5 4.5	-	nH nH
$L_s$	Internal source inductance	Measured from source lead to source bond pad	-	7.5	-	nH
$C_{iss}$ $C_{oss}$ $C_{rss}$	Input capacitance Output capacitance Feedback capacitance	$V_{GS} = 0 \text{ V}; V_{DS} = 25 \text{ V}; f = 1 \text{ MHz}$	- - -	1050 270 140	-	pF pF pF

**TrenchMOS™ transistor  
Logic level FET**

**PHP42N03LT, PHB42N03LT**

**REVERSE DIODE LIMITING VALUES AND CHARACTERISTICS**

$T_j = 25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$I_S$	Continuous source current (body diode)		-	-	45	A
$I_{SM}$	Pulsed source current (body diode)		-	-	180	A
$V_{SD}$	Diode forward voltage	$I_F = 25 \text{ A}; V_{GS} = 0 \text{ V}$ $I_F = 40 \text{ A}; V_{GS} = 0 \text{ V}$	-	0.95 1.0	1.2	V
$t_{rr}$ $Q_{rr}$	Reverse recovery time Reverse recovery charge	$I_F = 40 \text{ A}; -dI_F/dt = 100 \text{ A}/\mu\text{s};$ $V_{GS} = -10 \text{ V}; V_R = 25 \text{ V}$	-	52 0.08	-	ns $\mu\text{C}$

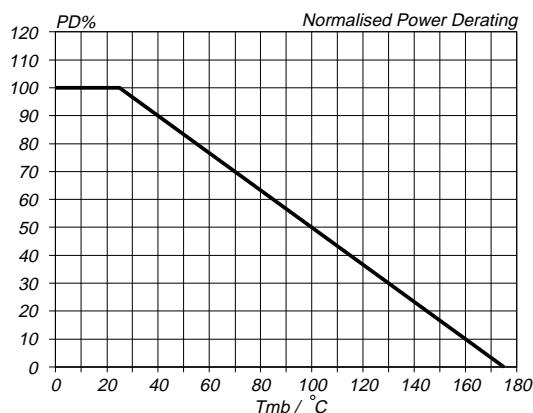


Fig.1. Normalised power dissipation.  
 $PD\% = 100 \cdot P_D/P_{D, 25^\circ\text{C}} = f(T_{mb})$

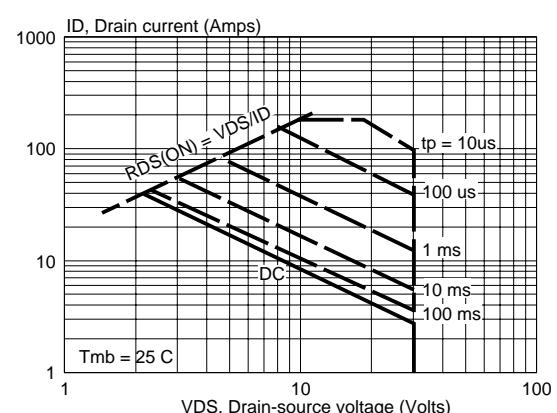


Fig.3. Safe operating area  
 $I_D \& I_{DM} = f(V_{DS})$ ;  $I_{DM}$  single pulse; parameter  $t_p$

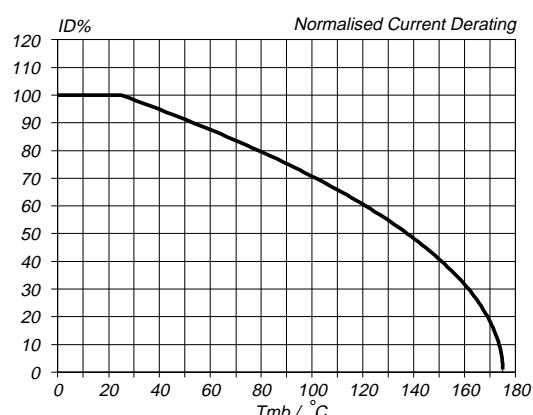


Fig.2. Normalised continuous drain current.  
 $ID\% = 100 \cdot I_D/I_{D, 25^\circ\text{C}} = f(T_{mb})$ ; conditions:  $V_{GS} \geq 5 \text{ V}$

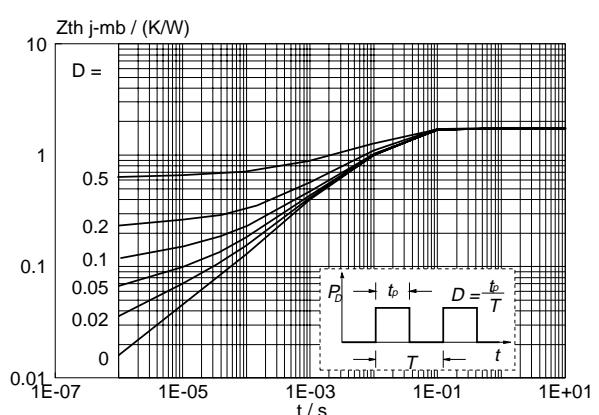


Fig.4. Transient thermal impedance.  
 $Z_{th j-mb} = f(t)$ ; parameter  $D = t_p/T$

## TrenchMOS™ transistor Logic level FET

**PHP42N03LT, PHB42N03LT**

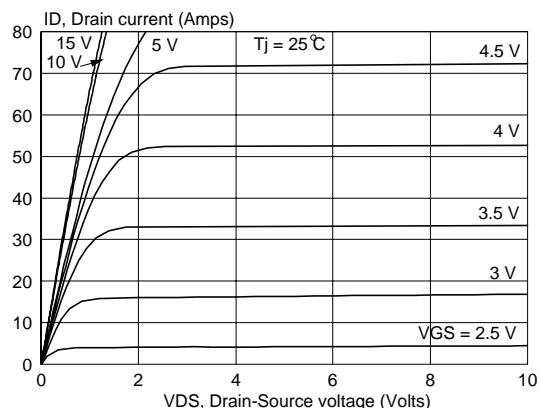


Fig.5. Typical output characteristics  
 $I_D = f(V_{DS})$ ; parameter  $V_{GS}$

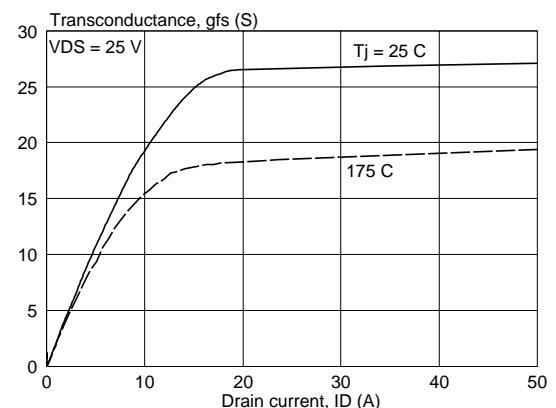


Fig.8. Typical transconductance  
 $g_{fs} = f(I_D)$

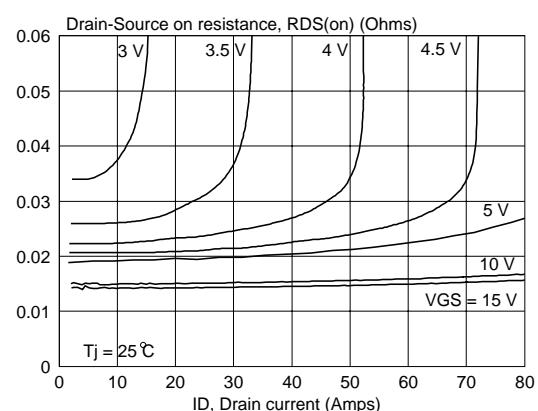


Fig.6. Typical on-state resistance  
 $R_{DS(ON)} = f(I_D)$ ; parameter  $V_{GS}$

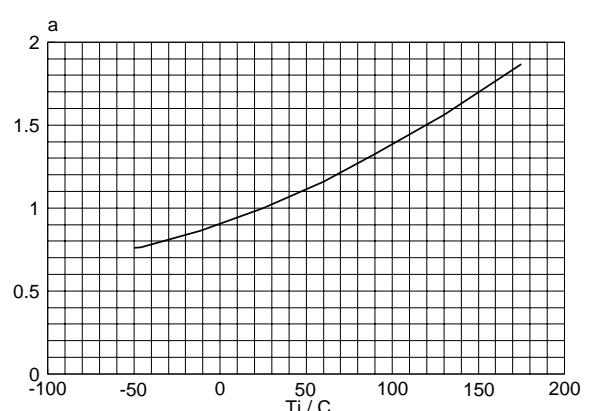


Fig.9. Normalised drain-source on-state resistance.  
 $a = R_{DS(ON)}/R_{DS(ON)25^\circ C} = f(T_j)$

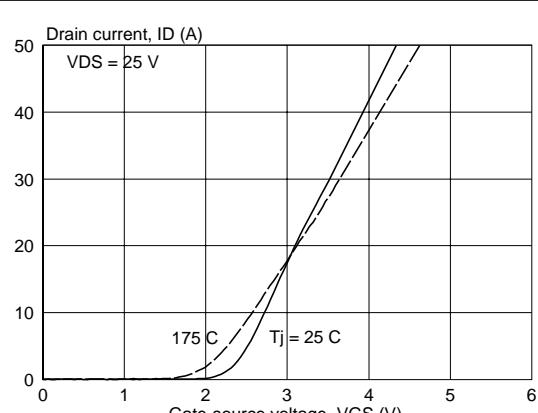


Fig.7. Typical transfer characteristics.  
 $I_D = f(V_{GS})$

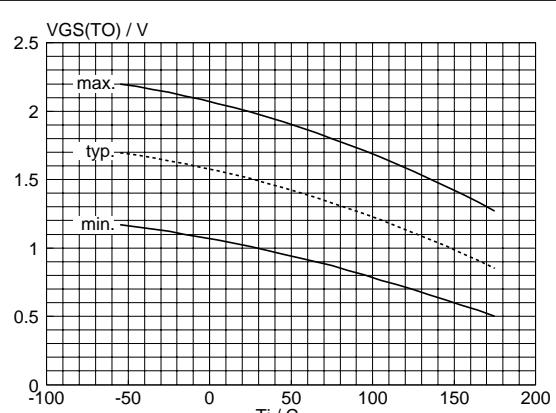


Fig.10. Gate threshold voltage.  
 $V_{GS(TO)} = f(T_j)$ ; conditions:  $I_D = 1 \text{ mA}$ ;  $V_{DS} = V_{GS}$

**TrenchMOS™ transistor  
Logic level FET**

**PHP42N03LT, PHB42N03LT**

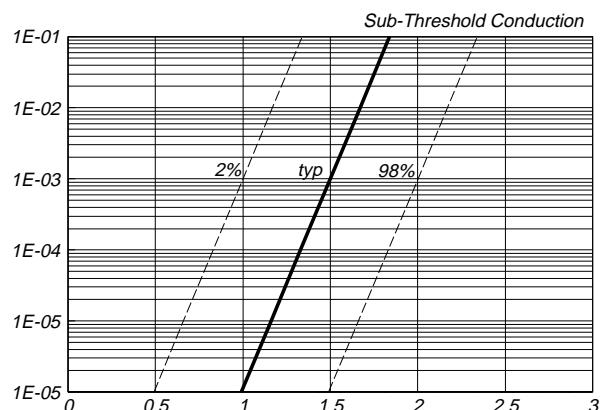


Fig.11. Sub-threshold drain current.  
 $I_D = f(V_{GS})$ ;  $V_{DS} = V_{GS}$

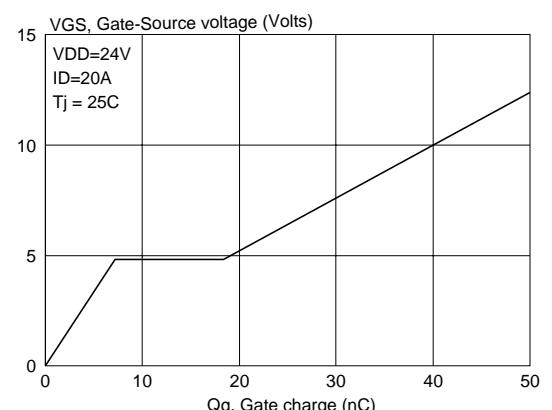


Fig.13. Typical turn-on gate-charge characteristics.  
 $V_{GS} = f(Q_g)$

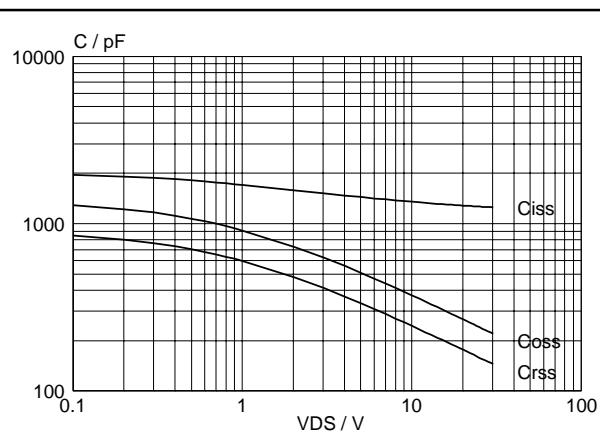


Fig.12. Typical capacitances,  $C_{iss}$ ,  $C_{oss}$ ,  $C_{rss}$ .  
 $C = f(V_{DS})$ ;  $V_{GS} = 0$  V;  $f = 1$  MHz

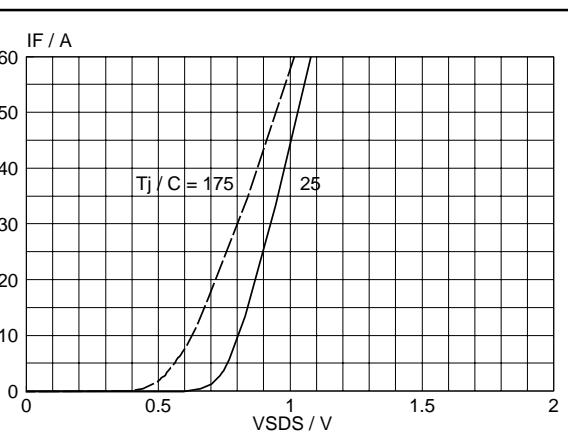


Fig.14. Typical reverse diode current.  
 $I_F = f(V_{SDS})$

TrenchMOS™ transistor  
Logic level FET

PHP42N03LT, PHB42N03LT

## MECHANICAL DATA

*Dimensions in mm*

Net Mass: 2 g

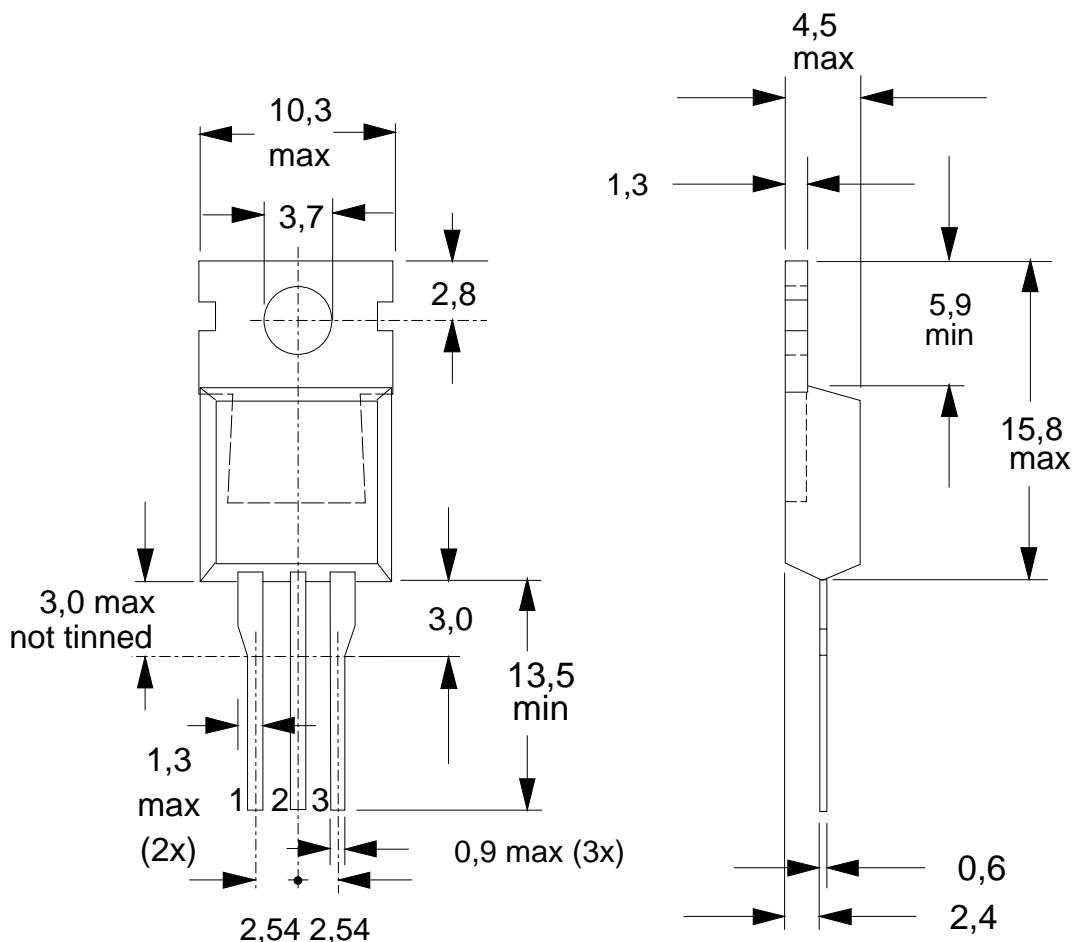


Fig.15. SOT78 (TO220AB); pin 2 connected to mounting base.

### Notes

1. Observe the general handling precautions for electrostatic-discharge sensitive devices (ESDs) to prevent damage to MOS gate oxide.
2. Refer to mounting instructions for SOT78 (TO220) envelopes.
3. Epoxy meets UL94 V0 at 1/8".

TrenchMOS™ transistor  
Logic level FET

PHP42N03LT, PHB42N03LT

## MECHANICAL DATA

*Dimensions in mm*

Net Mass: 1.4 g

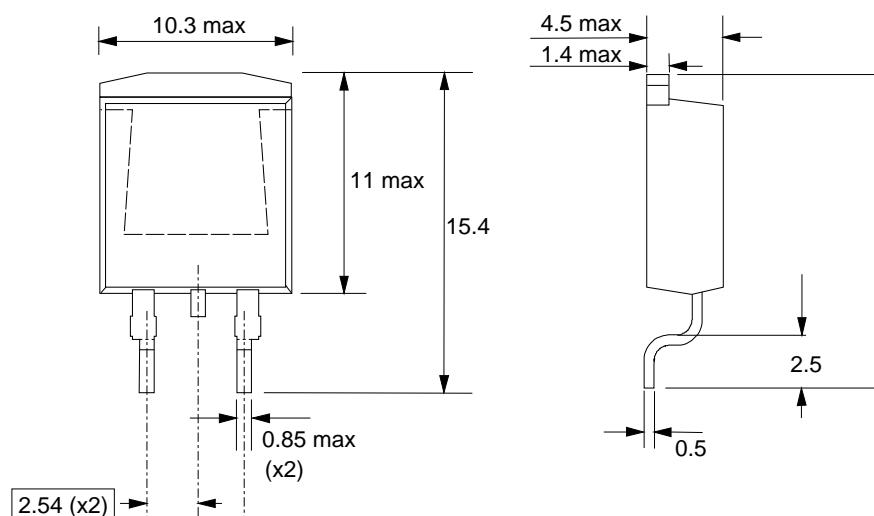


Fig.16. SOT404 : centre pin connected to mounting base.

## MOUNTING INSTRUCTIONS

*Dimensions in mm*

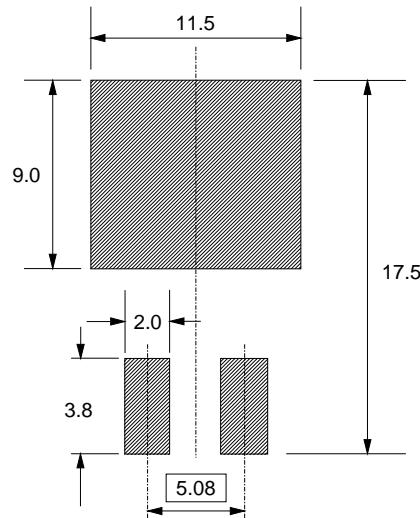


Fig.17. SOT404 : soldering pattern for surface mounting.

### Notes

1. Observe the general handling precautions for electrostatic-discharge sensitive devices (ESDs) to prevent damage to MOS gate oxide.
2. Epoxy meets UL94 V0 at 1/8".

TrenchMOS™ transistor  
Logic level FET

PHP42N03LT, PHB42N03LT

## DEFINITIONS

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	
<b>© Philips Electronics N.V. 1998</b>	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

## LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.