# **Dual D Type Master-Slave Flip-Flop**

The MC10H131 is a MECL 10H part which is a functional/pinout duplication of the standard MECL 10K family part, with 100% improvement in clock speed and propagation delay and no increase in power–supply current.

- Propagation Delay, 1.0 ns Typical
- Power Dissipation, 235 mW Typical
- Improved Noise Margin 150 mV (Over Operating Voltage and Temperature Range)
- Voltage Compensated
- MECL 10K-Compatible

#### **MAXIMUM RATINGS**

Characteristic	Symbol	Rating	Unit
Power Supply (V <sub>CC</sub> = 0)	VEE	-8.0 to 0	Vdc
Input Voltage (V <sub>CC</sub> = 0)	V <sub>I</sub>	0 to V <sub>EE</sub>	Vdc
Output Current — Continuous — Surge	l <sub>out</sub>	50 100	mA
Operating Temperature Range	TA	0 to +75	°C
Storage Temperature Range — Plastic — Ceramic	T <sub>stg</sub>	-55 to +150 -55 to +165	°C °C

# ELECTRICAL CHARACTERISTICS (VEE = -5.2 V ±5%) (See Note)

		0	<b>)</b> °	2	5°	7	′5°	
Characteristic	Symbol	Min	Max	Min	Max	Min	Max	Unit
Power Supply Current	ΙE	-	62	1	56	-	62	mA
Input Current High Pins 6, 11 Pin 9 Pins 7, 10 Pins 4, 5, 12, 13	<sup>I</sup> inH	1111	530 660 485 790	1111	310 390 285 465	1111	310 390 285 465	μА
Input Current Low	l <sub>inL</sub>	0.5	_	0.5	1	0.3	1	μΑ
High Output Voltage	Vон	-1.02	-0.84	-0.98	-0.81	-0.92	-0.735	Vdc
Low Output Voltage	V <sub>OL</sub>	-1.95	-1.63	-1.95	-1.63	-1.95	-1.60	Vdc
High Input Voltage	VIH	-1.17	-0.84	-1.13	-0.81	-1.07	-0.735	Vdc
Low Input Voltage	$V_{IL}$	-1.95	-1.48	-1.95	-1.48	-1.95	-1.45	Vdc


#### AC PARAMETERS


Propagation Delay Clock, CE Set, Reset	<sup>t</sup> pd	0.8 0.6	1.6 1.6	0.8 0.7	1.7 1.7	0.8 0.7	1.8 1.8	ns
Rise Time	t <sub>r</sub>	0.6	2.0	0.6	2.0	0.6	2.2	ns
Fall Time	t <sub>f</sub>	0.6	2.0	0.6	2.0	0.6	2.2	ns
Set-up Time	t <sub>set</sub>	0.7	1	0.7	ı	0.7	_	ns
Hold Time	<sup>t</sup> hold	0.8	ı	0.8	ı	0.8	_	ns
Toggle Frequency	f <sub>tog</sub>	250	_	250	_	250	_	MHz

### NOTE:


Each MECL 10H series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50–ohm resistor to -2.0 volts.

# MC10H131



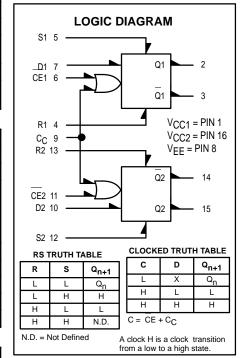

# DIP PIN ASSIGNMENT



Pin assignment is for Dual-in-Line Package. For PLCC pin assignment, see the Pin Conversion Tables on page 6–11 of the Motorola MECL Data Book (DL122/D).

## **APPLICATION INFORMATION**


The MC10H131 is a dual master—slave type D flip—flop. Asynchronous Set ( $\S$ ) and Reset (R) override Clock (C<sub>C</sub>) and Clock Enable (CE) inputs. Each flip—flop may be clocked separately by holding the common clock in the new low state and using the enable inputs for the clocking function. If the common clock is to be used to clock the flip—flop, the Clock Enable inputs must be in the low state.

In this case, the enable inputs perform the function of controlling the common clock.


The output states of the flip—flop change on the positive transition of the clock. A change in the information present at the data (D) input will not affect the output information at any other time due to master slave construction.

MOTOROLA 2–70

#### **OUTLINE DIMENSIONS**

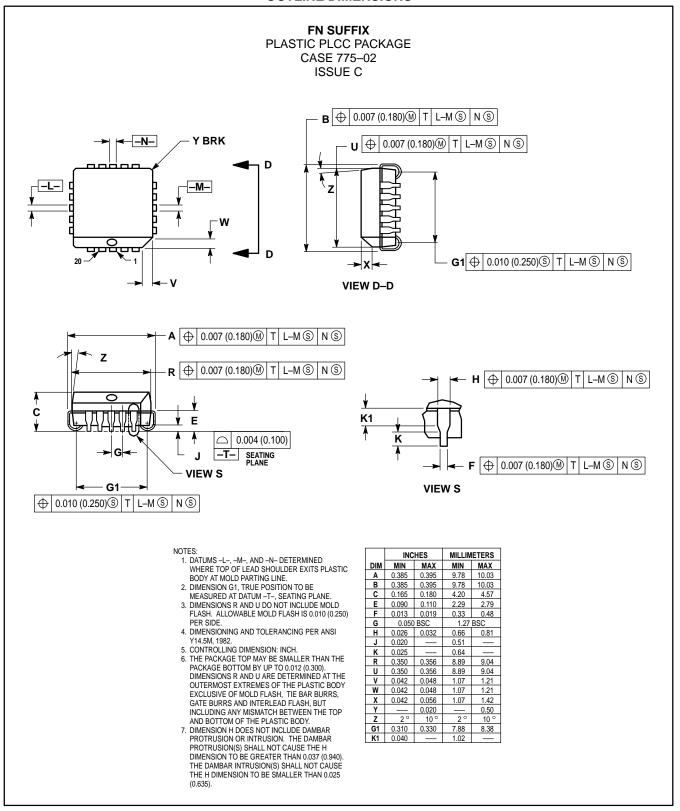


#### **OUTLINE DIMENSIONS**

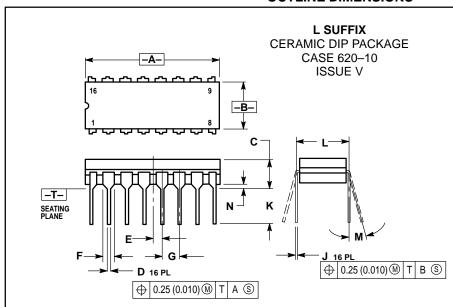

#### NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
- DIMENSION F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC

	INC	HES	MILLIN	IETERS	
DIM	MIN	MAX	MIN	MAX	
Α	0.750	0.785	19.05	19.93	
В	0.240	0.295	6.10	7.49	
С		0.200		5.08	
D	0.015	0.020	0.39	0.50	
Е	0.050 BSC		1.27 BSC		
F	0.055	0.065	1.40	1.65	
G	0.100	BSC	2.54 BSC		
Н	0.008	0.015	0.21	0.38	
K	0.125	0.170	3.18	4.31	
L	0.300 BSC		7.62 BSC		
M	0°	15°	0°	15°	
N	0.020	0.040	0.51	1.01	

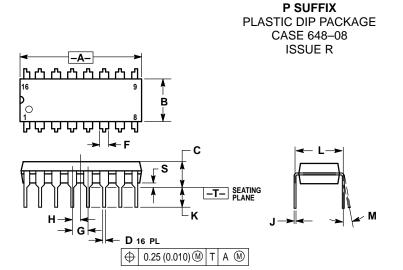

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ANSI
- Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL
- DIMENSION B DOES NOT INCLUDE MOLD FLASH.
- ROUNDED CORNERS OPTIONAL

	INC	HES	MILLIM	IETERS	
DIM	MIN	MAX	MIN	MAX	
Α	0.740	0.770	18.80	19.55	
В	0.250	0.270	6.35	6.85	
С	0.145	0.175	3.69	4.44	
D	0.015	0.021	0.39	0.53	
F	0.040	0.70	1.02	1.77	
G	0.100	BSC	2.54 BSC		
Н	0.050	BSC	1.27 BSC		
J	0.008	0.015	0.21	0.38	
K	0.110	0.130	2.80	3.30	
L	0.295	0.305	7.50	7.74	
M	0°	10°	0°	10 °	
S	0.020	0.040	0.51	1.01	

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typical parameters, including or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and (A) are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

#### How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



