Advance Information

Power Manager[™] Gallium Arsenide Power Rectifier

... ideally suited for high frequency power supplies, free wheeling diodes, and as polarity protection diodes, these state-of-the-art devices have the following features:


- Planar Epitaxial Construction
- Nitride Passivation for Stable Blocking Characteristics
- Monolithic Dual Die Available (MGR2018CT)
- Epoxy Meets UL94, Vo @ 1/8"
- Hyperfast and Soft Reverse Recovery Over Specified Temperature Range (15 ns)

Mechanical Characteristics

- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: MGR1018

MGR1018

GALLIUM ARSENIDE RECTIFIER 10 AMPERES 180 VOLTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	VRRM VRWM VR	180	V
DC Forward Current (T _C = 110°C)	IDC	10	А
Peak Repetitive Forward Current (At Rated V _R , Square Wave, 20 kHz, T _C = 85°C)	I _{FRM}	20	А
Non-Repetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	IFSM	60	А
Operating Junction Temperature and Storage Temperature	T _J , T _{stq}	-55 to 175	°C

THERMAL CHARACTERISTICS

Thermal Resistance – Junction to Case	$R_{\theta JC}$	4.3	°C/W
 Junction to Ambient 	$R_{\theta JA}$	64	

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1), see Figure 2	VF	T _J =25°C	T _J =125°C	V
$(I_F = 10 \text{ A})$ $(I_F = 5 \text{ A})$		1.4 1.1	1.5 1.1	
Maximum Instantaneous Reverse Current, see Figure 4	IR	T _J =25°C	T _J =125°C	μΑ
$(V_R = 180 \text{ V})$ $(V_R = 90 \text{ V})$		25 1	685 120	
Typical Reverse Recovery Time (2)	t _{rr}	T _J =25°C	T _J =125°C	ns
(V _R = 150 V, I _F = 5 A, di/dt = 200 A/μs) (V _R = 150 V, I _F = 10 A, di/dt = 200 A/μs)		12.6 13	12.4 12.7	
Typical Peak Reverse Recovery Current	I _{RM}	T _J =25°C	T _J =125°C	А
(V _R = 150 V, I _F = 5 A, di/dt = 200 A/μs) (V _R = 150 V, I _F = 10 A, di/dt = 200 A/μs)		1.5 1.6	1.6 1.7	

Note: This data sheet contains advance information only and is subject to change without notice.



⁽¹⁾ Pulse Test: Pulse Width = 300 μ s, Duty Cycle \leq 2.0%.

⁽²⁾ trr measured projecting from 25% of IRM to ground.

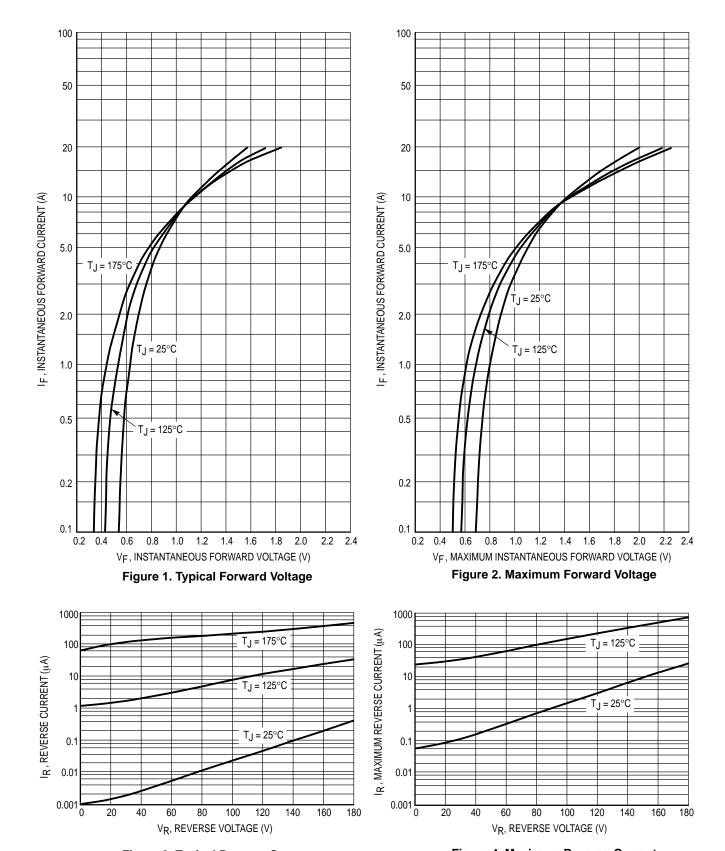


Figure 3. Typical Reverse Current

Figure 4. Maximum Reverse Current

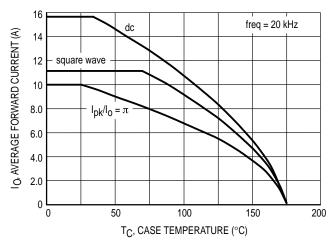


Figure 5. Current Derating Per Leg

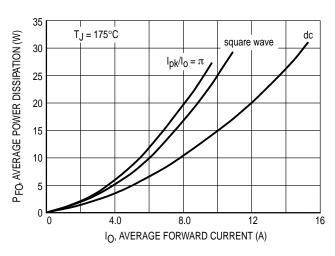


Figure 6. Forward Power Dissipation Per Leg

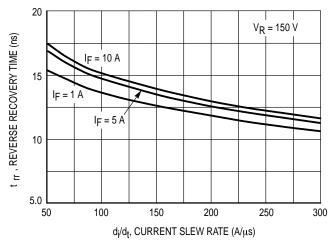


Figure 7. Typical t_{rr} Characteristics, $T_J = 25^{\circ}C$

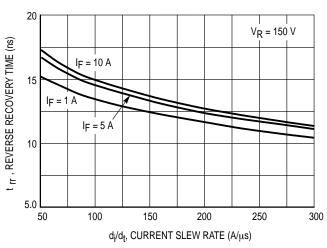


Figure 8. Typical t_{rr} Characteristics, $T_J = 125^{\circ}C$

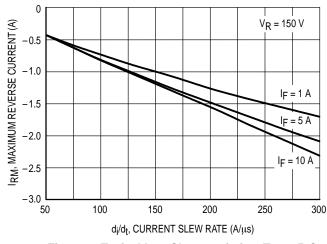


Figure 9. Typical IRM Characteristics, T_J = 25°C

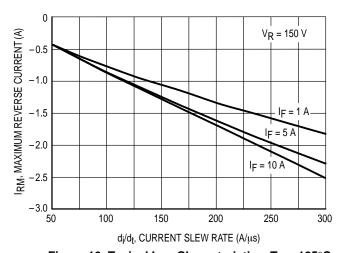


Figure 10. Typical I_{RM} Characteristics, $T_J = 125$ °C

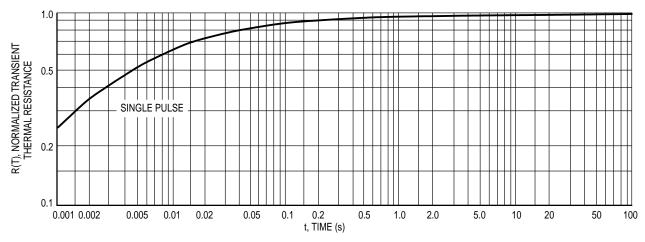


Figure 11. Typical Thermal Response


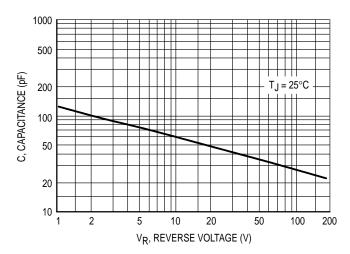


Figure 12. Typical Capacitance

PACKAGE DIMENSIONS

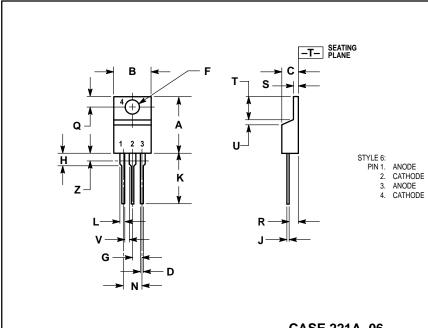

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

	INCHES MILLIMETE		IETERS	
DIM	MIN	MAX	MIN	MAX
Α	0.570	0.620	14.48	15.75
В	0.380	0.405	9.66	10.28
С	0.160	0.190	4.07	4.82
D	0.025	0.035	0.64	0.88
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.42	2.66
H	0.110	0.155	2.80	3.93
٦	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
Т	0.045	0.060	1.15	1.52
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.15	1.39
Т	0.235	0.255	5.97	6.47
C	0.000	0.050	0.00	1.27
٧	0.045		1.15	
Z		0.080		2.04

CASE 221A-06 ISSUE Y

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and an are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244–6609 INTERNET: http://Design_NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, Toshikatsu Otsuki, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–3521–8315

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298



