

COMPLEMENTARY SILICON
 POWER DARLINGTON TRANSISTORS



- 2N6036 IS A SGS-THOMSON PREFERRED SALES TYPE
- COMPLEMENTARY PNP - NPN DEVICES
- INTEGRATED ANTI-PARALLEL COLLECTOR-EMITTER DIODE

APPLICATIONS

- GENERAL PURPOSE SWITCHING
- GENERAL PURPOSE AMPLIFIER

DESCRIPTION

The 2N6036 and 2N6039 are complementary silicon power Darlington transistors mounted in Jedec SOT-32 plastic package.

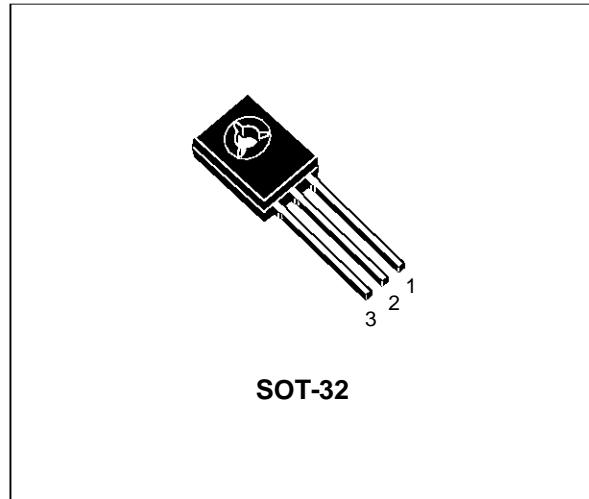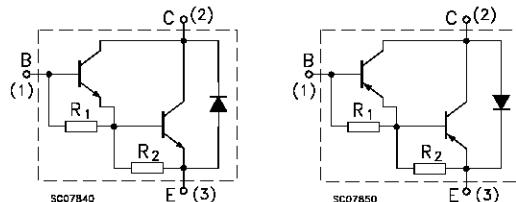
INTERNAL SCHEMATIC DIAGRAM


R₁ Typ. = 7 kΩ R₂ Typ. = 230 Ω

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value		Unit
		PNP	NPN	
V _{CBO}	Collector-Base Voltage ($I_E = 0$)		80	V
V _{CEO}	Collector-Emitter Voltage ($I_B = 0$)		80	V
V _{EBO}	Emitter-Base Voltage ($I_C = 0$)		5	V
I _C	Collector Current		4	A
I _{CM}	Collector Peak Current		8	A
I _B	Base Current		0.1	A
P _{tot}	Total Dissipation at $T_c \leq 25^\circ\text{C}$		40	W
T _{stg}	Storage Temperature		-65 to 150	°C
T _j	Max. Operating Junction Temperature		150	°C

For PNP types voltage and current values are negative.

2N6036/2N6039

THERMAL DATA


R _{thj-case}	Thermal Resistance Junction-case	Max	3.12	°C/W
R _{thj-amb}	Thermal Resistance Junction-ambient	Max	83.3	°C/W

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^\circ\text{C}$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I _{CEx}	Collector Cut-off Current ($V_{BE} = -1.5\text{V}$)	$V_{CE} = \text{rated } V_{CEO}$ $V_{CE} = \text{rated } V_{CEO} \quad T_c = 125^\circ\text{C}$			0.1 0.5	mA mA
I _{CB0}	Collector Cut-off Current ($I_E = 0$)	$V_{CE} = \text{rated } V_{CBO}$			0.1	mA
I _{CEO}	Collector Cut-off Current ($I_B = 0$)	$V_{CE} = \text{rated } V_{CEO}$			0.1	mA
I _{EBO}	Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 5\text{V}$			2	mA
V _{CEO(sus)*}	Collector-Emitter Sustaining Voltage	$I_C = 100\text{ mA}$	80			V
V _{CE(sat)*}	Collector-Emitter Saturation Voltage	$I_C = 2\text{ A} \quad I_B = 8\text{ mA}$ $I_C = 4\text{ A} \quad I_B = 40\text{ mA}$			2 3	V
V _{BE(sat)*}	Base-Emitter Saturation Voltage	$I_C = 4\text{ A} \quad I_B = 40\text{ mA}$			4	V
V _{BE*}	Base-Emitter Voltage	$I_C = 2\text{ A} \quad V_{CE} = 3\text{ V}$			2.8	V
h_{FE}^*	DC Current Gain	$I_C = 0.5\text{ A} \quad V_{CE} = 3\text{ V}$ $I_C = 2\text{ A} \quad V_{CE} = 3\text{ V}$ $I_C = 4\text{ A} \quad V_{CE} = 3\text{ V}$	500 750 100		15000	
h_{fe}	Small Signal Current Gain	$I_C = 0.75\text{ A} \quad V_{CE} = 10\text{ V} \quad f = 1\text{KHz}$	25			
C _{CBO}	Collector Base Capacitance	$I_E = 0 \quad V_{CB} = 10\text{ V} \quad f = 1\text{MHz}$ for NPN types for PNP types			100 200	pF pF

* Pulsed: Pulse duration = 300 μs , duty cycle 1.5 %


Safe Operating Area

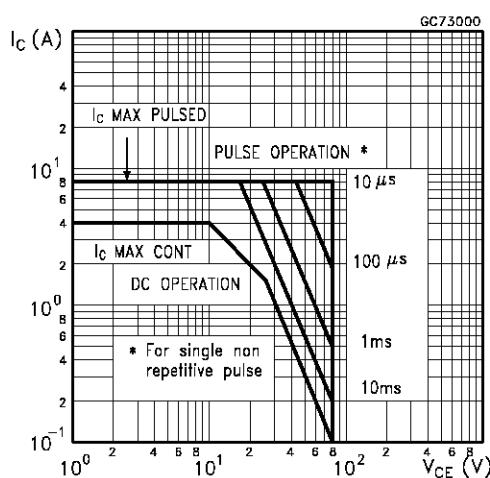


Derating Curve

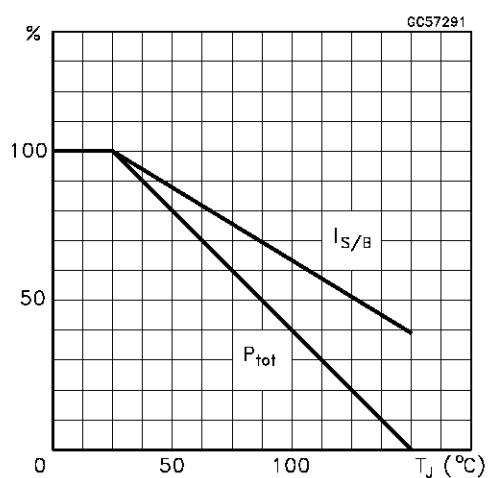


DC Current Gain (NPN type)

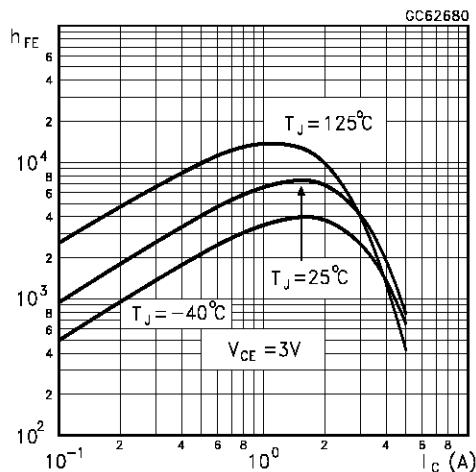


DC Current Gain (PNP type)

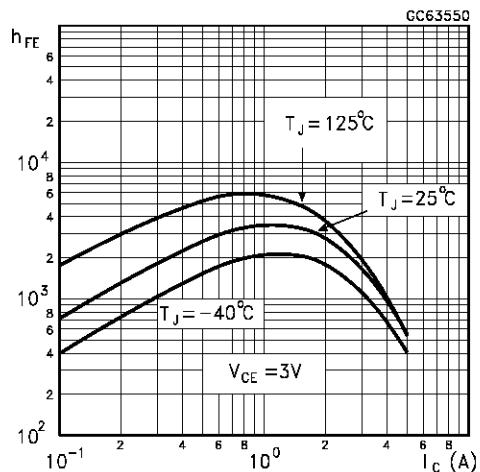


Collector Emitter Saturation Voltage (NPN type)

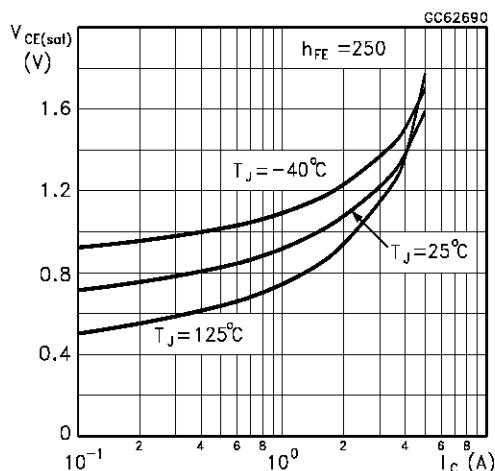


Collector Emitter Saturation Voltage (PNP type)

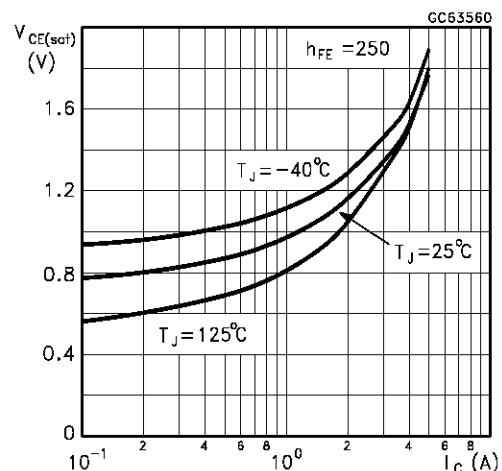

Base Emitter Saturation Voltage (NPN type)

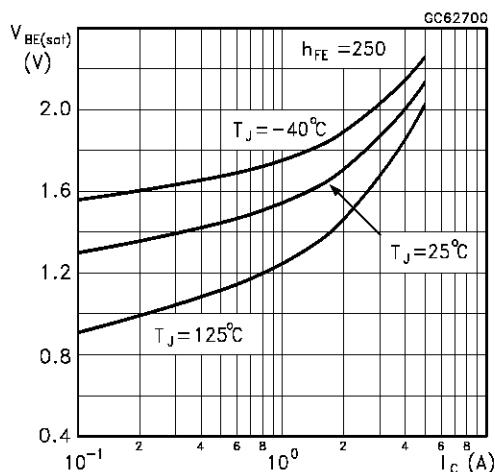


Base Emitter Saturation Voltage (PNP type)

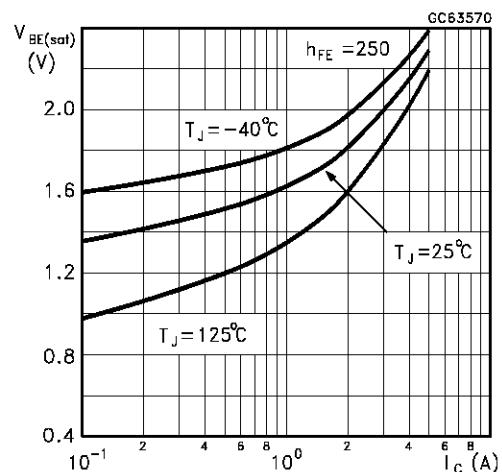


2N6036/2N6039


Base-Emitter On Voltage (NPN type)

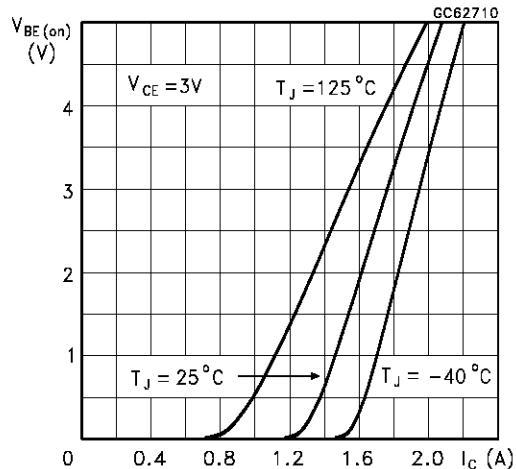


Base-Emitter On Voltage (PNP type)

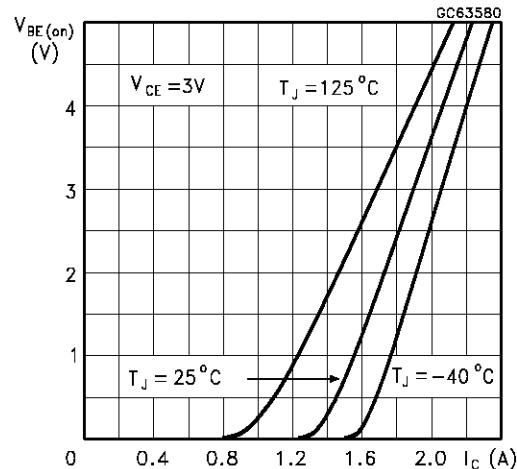

Freewheel Diode Forward Voltage (NPN type)

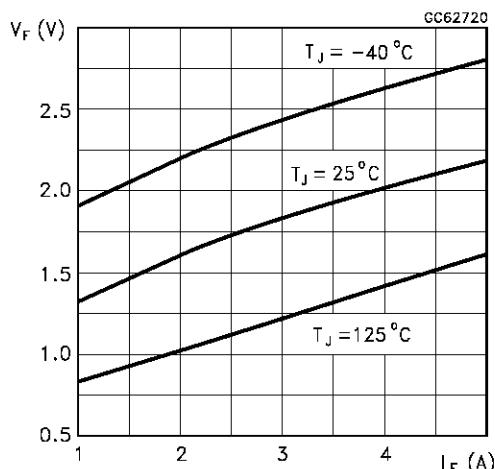


Freewheel Diode Forward Voltage (PNP type)

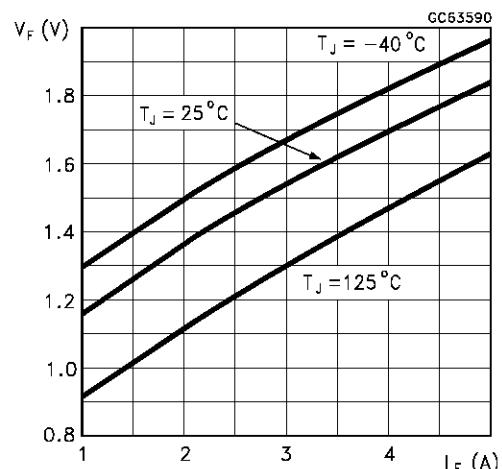

SOT-32 (TO-126) MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	7.4		7.8	0.291		0.307
B	10.5		10.8	0.413		0.445
b	0.7		0.9	0.028		0.035
b1	0.49		0.75	0.019		0.030
C	2.4		2.7	0.040		0.106
c1	1.0		1.3	0.039		0.050
D	15.4		16.0	0.606		0.629
e		2.2			0.087	
e3	4.15		4.65	0.163		0.183
F		3.8			0.150	
G	3		3.2	0.118		0.126
H			2.54			0.100
H2		2.15			0.084	

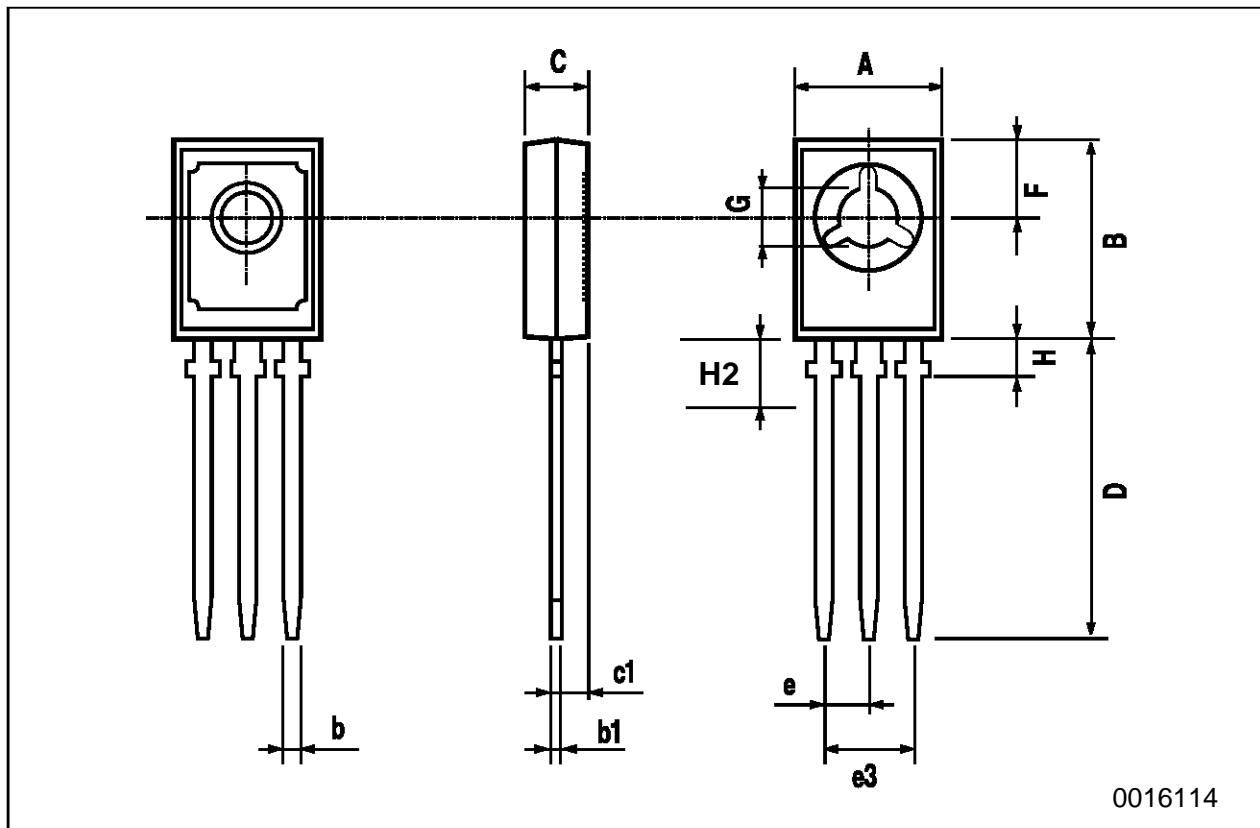

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A