


# Gate Controlled Current Limiter

## IXCP 01N90E IXCY 01N90E


$V_{DSS} = 900 \text{ V}$   
 $I_{D(limit)} = 250 \text{ mA}$   
 $R_{DS(on)} = 80 \text{ } \Omega$

N-Channel, Enhancement Mode

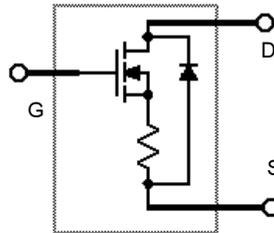


Symbol	Test Conditions	Maximum Ratings	
$V_{DSS}$	$T_J = 25^\circ\text{C to } 150^\circ\text{C}$	900	V
$V_{DGR}$	$T_J = 25^\circ\text{C to } 150^\circ\text{C}; R_{GS} = 1 \text{ M}\Omega$	900	V
$V_{GS}$	Continuous	$\pm 20$	V
$V_{GSM}$	Transient	$\pm 30$	V
$P_D$	$T_C = 25^\circ\text{C}$	40	W
$T_J$		-55 ... +150	$^\circ\text{C}$
$T_{JM}$		150	$^\circ\text{C}$
$T_{stg}$		-55 ... +150	$^\circ\text{C}$
$T_L$	1.6 mm (0.062 in.) from case for 10 s	300	$^\circ\text{C}$
$M_d$	Mounting torque with 3.5mm screw (TO-220)	0.55/5 Nm/lb.in.	
<b>Weight</b>		TO-251/252 = 1 g, TO-220 = 4 g	

TO-252 (IXCY)



TO-220 (IXCP)

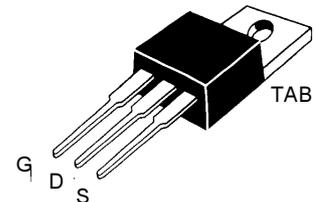

G = Gate,      D = Drain,  
S = Source,    TAB = Drain

Symbol	Test Conditions	Characteristic Values ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)		
		min.	typ.	max.
$V_{DSS}$	$V_{GS} = 0 \text{ V}, I_D = 25 \text{ } \mu\text{A}$	900		V
$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 25 \text{ } \mu\text{A}$	2.5		5 V
$I_{GSS}$	$V_{GS} = \pm 20 \text{ V}, V_{DS} = 0$			$\pm 50 \text{ nA}$
$I_{DSS}$	$V_{DS} = V_{DSS}, V_{GS} = 0 \text{ V}$			10 $\mu\text{A}$
$R_{DS(on)}$	$V_{GS} = 10 \text{ V}, I_D = 50 \text{ mA}$ Pulse test, $t \leq 300 \text{ } \mu\text{s}$ , duty cycle $d \leq 2 \%$			80 $\Omega$
$I_{DP}$	Plateau Current; $V_{DS} = 10 \text{ V}, V_{GS} = 10 \text{ V}$ Pulse test, $t \leq 300 \text{ } \mu\text{s}$ , duty cycle $d \leq 2 \%$	100		130 mA


### Features

- High output resistance in the saturated mode of operation
- Rugged HDMOS™ process
- Stable peak drain current limit
- High voltage current regulator
- International standard packages


### Applications

- Current regulation
- Over current and over voltage protection for sensitive loads
- Linear regulator

Symbol	Test Conditions	Characteristic Values		
		(T <sub>J</sub> = 25°C, unless otherwise specified)		
		min.	typ.	max.
<b>g<sub>fs</sub></b>	V <sub>DS</sub> = 20 V; I <sub>D</sub> = 100 mA, pulse test			40 mS
<b>C<sub>iss</sub></b>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 25 V, f = 1 MHz		133	pF
<b>C<sub>oss</sub></b>			24	pF
<b>C<sub>rss</sub></b>			6.6	pF
<b>t<sub>d(on)</sub></b>	V <sub>DS</sub> = 500 V, I <sub>D</sub> = 50 mA		15	ns
<b>t<sub>r</sub></b>			137	ns
<b>t<sub>d(off)</sub></b>	V <sub>GS</sub> = 10 V, R <sub>G</sub> = 50 Ω (External)		11	ns
<b>t<sub>f</sub></b>			131	ns
<b>Q<sub>g(on)</sub></b>	V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 500 V, I <sub>D</sub> = 50 mA		7.5	nC
<b>Q<sub>gs</sub></b>			2.2	nC
<b>Q<sub>gd</sub></b>			3.0	nC
<b>ΔI<sub>A(p)</sub>/ΔT</b>	Plateau Current Shift with Temperature	V <sub>DS</sub> = 10 V, V <sub>GS</sub> = 10 V	±50	ppm/K
<b>ΔV<sub>AK</sub>/ΔI<sub>A(p)</sub></b>	Dynamic Resistance	V <sub>DS</sub> = 10 V, V <sub>GS</sub> = 10 V	125	kΩ
<b>V<sub>F</sub></b>	I <sub>F</sub> = 50mA			1.8 V
<b>R<sub>thJC</sub></b>				3.1 KW
<b>R<sub>thCA</sub></b>	TO-220		80	KW
	TO-251/252		100	KW

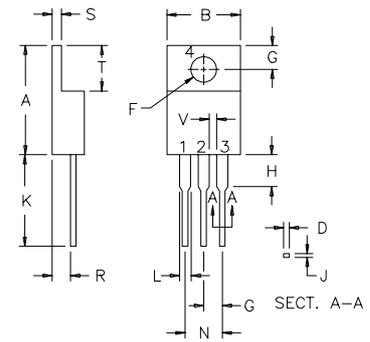**TO-220 AB Outline**


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	14.23	16.51	.560	.650
B	9.66	10.66	.380	.420
C	3.56	4.82	.140	.190
D	0.64	0.89	.025	.035
F	3.54	4.06	.139	.161
G	2.29	2.79	.090	.110
H	—	6.35	—	.250
J	0.51	0.76	.020	.030
K	12.70	14.73	.500	.580
L	1.15	1.77	.045	.070
N	4.83	5.33	.190	.210
Q	2.54	3.42	.100	.135
R	2.04	2.49	.080	.115
S	0.64	1.39	.025	.055
T	5.85	6.85	2.30	2.70
V	1.15	—	.045	—

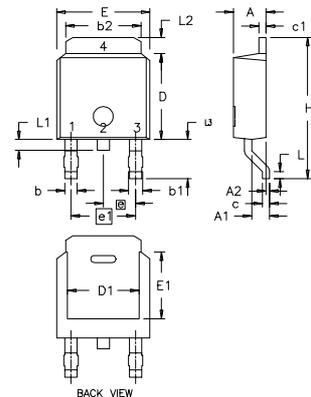**TO-252 AA Outline**


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.19	2.38	0.086	0.094
A1	0.89	1.14	0.035	0.045
A2	0	0.13	0	0.005
b	0.64	0.89	0.025	0.035
b1	0.76	1.14	0.030	0.045
b2	5.21	5.46	0.205	0.215
c	0.46	0.58	0.018	0.023
c1	0.46	0.58	0.018	0.023
D	5.97	6.22	0.235	0.245
D1	4.32	5.21	0.170	0.205
E	6.35	6.73	0.250	0.265
E1	4.32	5.21	0.170	0.205
e	2.28 BSC		0.090 BSC	
e1	4.57 BSC		0.180 BSC	
H	9.40	10.42	0.370	0.410
L	0.51	1.02	0.020	0.040
L1	0.64	1.02	0.025	0.040
L2	0.89	1.27	0.035	0.050
L3	2.54	2.92	0.100	0.115

IXYS reserves the right to change limits, test conditions, and dimensions.

 IXYS MOSFETS and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715  
 4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025

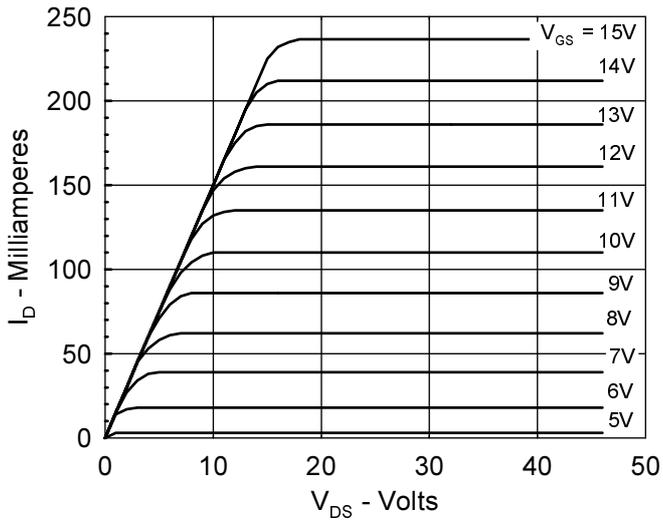


Figure 1, Output Characteristics at 25°C

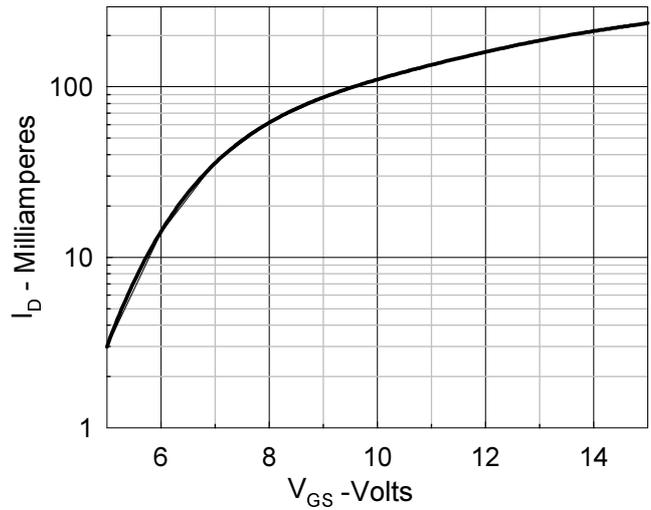


Figure 2. Drain Current vs. Gate Voltage

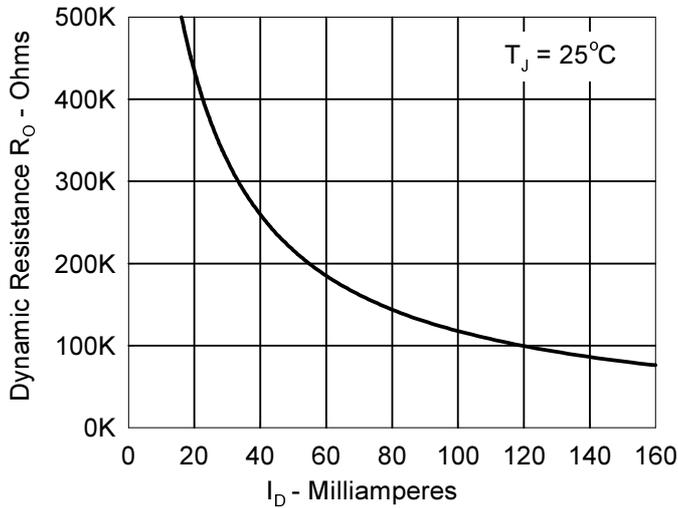


Figure 3. Dynamic Output Resistance  $R_O$  vs. Drain Current.

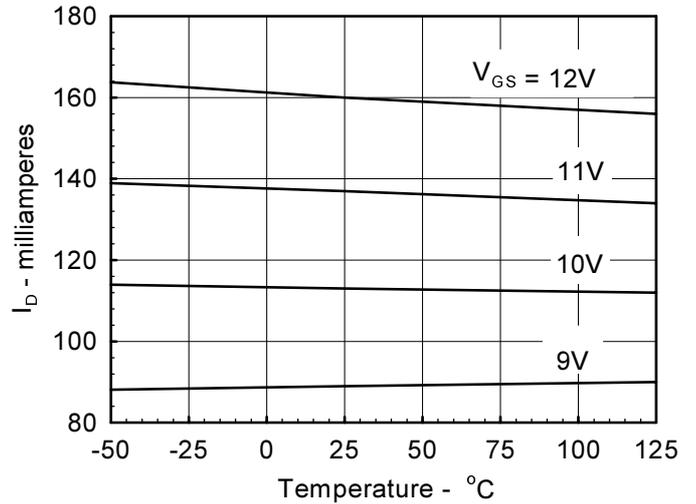


Figure 4. Drain Current vs. Temperature for a constant gate-source voltage.

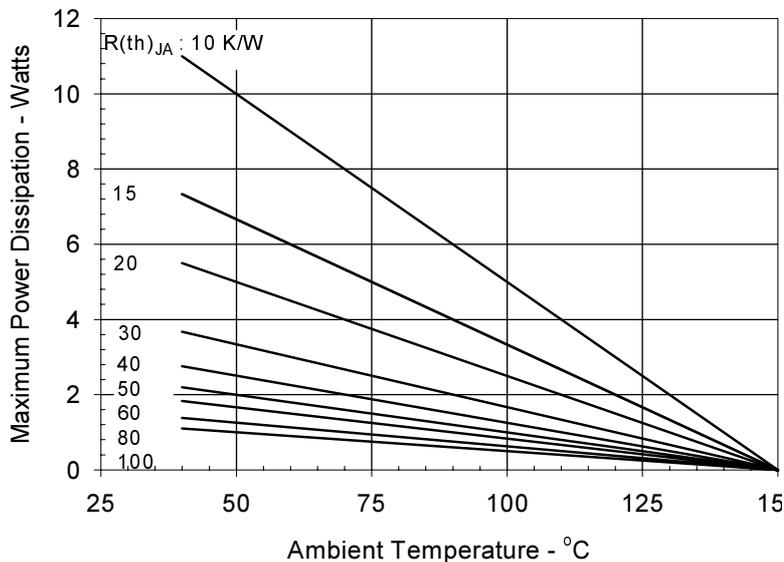


Figure 5. Allowable Power Dissipation for various heat sinking conditions. Note that the junction temperature can be derated by increasing the ambient temperature a like amount.

**IXYS Semiconductor GmbH**  
 Edisonstr. 15, D-68623 Lampertheim  
 Telefon: +49-6206-503-0, Fax: +49-6206-503627  
 e-mail: marcom@ixys.de

**IXYS Corporation**  
 3540 Bassett Street, Santa Clara CA 95054  
 Phone: (408) 982-0700, Fax: 408-496-0670  
 e-mail: sales@ixys.com  
 http://www.ixys.com

## IXYS International Sales Representatives

### Germany (Reps)

**North**  
 Hubert Schroeter KG  
 Saseler Bogen 1  
 22393 Hamburg  
 Phone: 040/6 00 006-0  
 Fax: 040/6 00 006-30

**West**  
 Erhard Mannheim KG  
 Industrievertretungen  
 Heidestraße 4  
 42579 Heiligenhaus  
 Phone: 02056/9 83 60  
 Fax: 02056/5 74 37

**Southwest**  
 Hartmut Hauber  
 Wahlwiesenstraße 3  
 71711 Steinheim  
 Phone: 07144/28 15 03/04  
 Fax: 07144/28 15 05

**South**  
 Reiner Neuf  
 Rhönstr. 3  
 97791 Obersinn  
 Phone: 09356/97 20 20  
 Fax: 09356/97 20 20

**Berlin**  
 Bernd Meyer  
 Furkastr. 67  
 12107 Berlin  
 Phone: 030/74 79 25 30  
 Fax: 030/74 79 25 31

### Germany (Distris)

Kluxen GmbH  
 Nordkanal 52  
 20097 Hamburg 1  
 Phone: 040/23 70 15 29  
 Fax: 040/23 03 85

Dietrich Schuricht  
 GmbH & Co. KG  
 Richtweg 32  
 28195 Bremen  
 Phone: 0421/36 54 54  
 Fax: 0421/36 54 291

Ingenieurbüro Rainer König  
 Giesendorfer Str. 11 a  
 12207 Berlin  
 Phone: 030/76 89 09 16  
 Fax: 030/76 89 09 30

MSC Vertriebs GmbH  
 Industriestraße 16  
 76297 Stutensee  
 Phone: 07249/910-0  
 Fax: 07249/79 93

Future Electronics  
 Deutschland GmbH  
 Münchner Straße 18  
 85774 Unterföhring  
 Phone: 089/95 72 70  
 Fax: 089/95 72 71 29

### Sparepart-Service

ABB Industrietechnik AG  
 Geschäftsbereich Service  
 Edisonstr. 15  
 68623 Lampertheim  
 Phone: 06206/503 272  
 Fax: 06206/503 620

IXYS Semiconductor GmbH  
 Edisonstr. 15  
 68623 Lampertheim  
 Phone: 06206/503 394  
 Fax: 06206/503 627

### Europe

**Austria**  
 ABB Serienprodukte Ges.m.b.H.  
 Abt. SERTQ  
 Wienerbergstraße 11 B  
 P.O. Box 184  
 1101 Wien  
 Phone: 01-60 10 9-6153  
 Fax: 01-60 10 9-8600

**Belgium**  
 SA ASEA BROWN BOVERI  
 SERVICE NV  
 Hoge Wei 27  
 B-1930 Zaventem  
 Phone: +32-0-2 718 64 84  
 Fax: +32-0-2 718 65 36

**Denmark**  
 C-88 A/S  
 Savsvinget 7  
 DK-2970 Hørsholm  
 Phone: +45 70 10 48 88  
 Fax: +45 70 10 48 89

**Finland**  
 Teamtron OY  
 Tikkurilantie 68 C  
 01300 Vantaa  
 Phone: 358-9-8571770  
 Fax: 358-9-85170600

**France**  
 Eurocomposant S.A.  
 144 Avenue Joseph Kessel  
 78960 Voisins le Bretonneux  
 Phone: 1-30 64 95 15  
 Fax: 1-30 43 68 27

**Greece**  
 Markides Michelis & Co  
 8, Markris Str., Aegaleo  
 122 41 Athens  
 Phone: 1-5 98 01 45  
 Fax: 1-5 90 98 33

**Great Britain**  
 IXYS Semiconductor GmbH  
 Providence House  
 Forest Road, Binfield  
 Bracknell,  
 Berkshire RG 12 5HP  
 Phone: 01344-48 28 20  
 Fax: 01344-48 28 10  
 e-mail:  
 ixys.uk.sales@dial.pipex.com

**Great Britain**  
 GD Rectifiers Ltd.  
 Victoria Gardens  
 Burgess Hill  
 West Sussex RH159NB  
 Phone: 01444-24 34 52  
 Fax: 01444-87-07-22

**Great Britain**  
 Larontrol Ltd.  
 Unit K4 Brookside Avenue  
 Rustington Trading Estate  
 Littlehampton  
 West Sussex BN16 3LF  
 Phone: 01903-77 11 60  
 Fax: 01903-77 20 73

**Great Britain**  
 Future Electronics  
 Poyle Road, Colnbrook  
 Berkshire SL3 0EZ  
 Phone: 01753-68 70 00  
 Fax: 01753-68 91 00

**Italy**  
 ABB DACOM SpA  
 Viale Edison, 50  
 20099 Sesto San Giovanni (MI)  
 Phone: 02-26 232.125  
 Fax: 02-26 232.144

**Netherlands**  
 ABB Componenten B.V.  
 Lylantse Baan 9  
 2908 LG Capelle a/d IJssel  
 Phone: 010-2 58 22 50  
 Fax: 010-4 58 65 59

**Norway**  
 Henaco A/S  
 Trondheimsveien 436  
 Po. box 126, Kalbakken  
 0902 Oslo 9  
 Phone: 2-216 21 10  
 Fax: 2-225 77 80

**Sweden**  
 Pelcon Electronics AB  
 Girovägen 13  
 Box 6023  
 17562 Järfälla  
 Phone: 8-7 95 98 70  
 Fax: 8-7 60 76 85

**Switzerland**  
 ABB Normelec AG  
 Badenerstr. 790  
 8048 Zürich-Altstetten  
 Phone: 1-4 35 66 66  
 Fax: 1-4 35 66 06

**Spain**  
 ABI Semiconductores  
 Dalia 387 Ch 6  
 28109 El Soto (Alcobendas)  
 Phone: 91-6 50 76 51  
 Fax: 91-6 50 03 49

**Spain**  
 AQL electrónica, s.a.  
 General Palanca, 26  
 28045 Madrid  
 Phone: 91-4 67 75 12  
 Fax: 91-5 30 29 34

**Spain**  
 Rectificadores Guasch S.A.  
 Componentes y Electronica de  
 Potencia  
 Alaba, 60-62  
 08005 Barcelona  
 Phone: 93-3 09 88 91  
 Fax: 93-3 00 18 41

**Turkey**  
 Özdisan Elektronik Pazarlama  
 San. VE TIC. A.S.  
 Bereketzade Mahallesi  
 Galata Kulesi Sokak No: 34/3  
 Karaköy/Istanbul  
 Phone: 212-243 40 34, 251 29 41  
 Fax: 212-244 59 43

### Asia, Australia, Africa

**Australia**  
 Braemac PTY. Ltd.  
 1/59-61 Burrows Road  
 Alexandria NSW 2015  
 Phone: (02) 9550 6600  
 Fax: (02) 9550 6370

**China**  
 KARIN Electronic Supplies  
 Room 1095, Pana Tower  
 36 Hai Dian Road  
 Hai Dian District, Beijing  
 Phone: 8610-6262 9049  
 Fax: 8610-6264 8830

**China**  
 KARIN Electronic Supplies  
 Room 305, A Section,  
 Yin Hai Bldg., 250 Cao Xi Rd.  
 Shanghai  
 Phone: 8621-6482 3543  
 Fax: 8632-6482 3542

**China**  
 KARIN Electronic Supplies  
 Room 1503, Oriental Plaza  
 39 Janshe Rd, Shenzhen  
 Phone: 86755-220 9219  
 Fax: 86755-228 4992

**China**  
 Sunguard Electronics Ltd.  
 Room 112, No. 12B  
 Zhong Guan Chun Road  
 Hai Dian District, Beijing  
 Phone: 10-264-5210,  
 Fax: 10-254-2870

**China**  
 Sunguard Electronics Ltd.  
 Room 805, 8/F.,  
 Sufa Building, Block 306  
 ZhenHua Road, Shenzhen  
 Phone: 0755-3230 748 (658)  
 Fax: 0755-3237 394

**China**  
 FORD Power Electronics Company  
 Unit 505, 5/F, B Town  
 Hengli Building No. 1  
 Hualong Street, Changzhou City  
 Jiangsu Province, 213003  
 Phone: 86-519-6684942  
 Fax: 86-519-6688597

**Hongkong**  
 KARIN Electronic Supplies  
 Co. Ltd., Div. 8  
 KARIN Building, 5F  
 166 Wai Yip St., Kwun Tong  
 Kowloon, Hong Kong  
 Phone: 852-2763 3100  
 Fax: 852-2343 6479

**Hongkong**  
 Rével Electronics Co. Ltd.  
 Unit 11, 12/Floor, Ricky Centre  
 36 Chong Yip Street, Kwun Tong  
 Kowloon, Hong Kong  
 Phone: 23 89-88 91  
 Fax: 23 89-24 48

**Hongkong**  
 Sunguard Electronics Ltd.  
 907-10 Yat Chau,  
 International Plaza  
 118 Connaught Road West  
 Hong Kong  
 Phone: (852) 2811 8230  
 Fax: (852) 2960 1239,  
 2960 1216

**India**  
 Chadda Power Semiconductors  
 501, Savera Apts.Versova Road,  
 Andheri (West) Bombay-400 061  
 Phone: 022-6 26 06 78  
 Fax: 022-6 31 63 84

**Israel**  
 Gallium Electronics Ltd.  
 11 Hasadna St., P.O.B. 2552  
 IL 43650 RA'ANANA  
 Phone: 972 9 74 82 182  
 Fax: 972 9 74 84 046

**Japan**  
 Unidux Inc.  
 5-1-21 Kyonan-cho,  
 Musashino-shi, Tokyo 180  
 Phone: 0422-32-4500  
 Fax: 0422-31-2050

**Japan**  
 Systems Marketing, Inc.  
 Fukui Bldg 2-2-12, Sotokanda,  
 Chiyoda-Ku, Tokyo 101  
 Phone: 03-32 54 27 51  
 Fax: 03-32 54 32 88

**Japan**  
 Trancy INC  
 New Heights Aoyama 203  
 1-1-10 Shibuya,  
 Shibuya-Ku Tokyo 150  
 Phone: +81-3-3486-7211  
 Fax: +81-3-3486-7214

**Korea**  
 IXsem Korea  
 A-703, Winners Officetel, 157-2,  
 Zamsil-Dong, Songpa-Ku, Seoul  
 Phone: +82 2 203 9042  
 Fax: +82 2 203 9043

**Korea**  
 Kisung International Co. Ltd.  
 A-7-121, 604-1  
 Kuro-Dong, Kuro-Ku, Seoul  
 Phone: 02-679 7348  
 Fax: 02-675 1404

**Korea**  
 Daan Electronic Co., Ltd.  
 Daan Bldg, 4F, 22-1 Singye-Dong  
 Yongsan-Ku, Seoul  
 Phone: 02-822-718-8033  
 Fax: 02-822-718 1160+1161

**Singapore**  
 Winedge Electronics (S) Pte Ltd.  
 BLK 4008 #03-13, Ang Mo Kio  
 Ave 10  
 Techplace 1, Singapore 569625  
 Phone: 3-455-6311  
 Fax: 3-455-6811

**South Africa**  
 ABB Industry (Pty) Ltd. Drives  
 P.O. Box 11494, Randhart 1457  
 Phone: 011-8 64 53 40  
 Fax: 011-9 08 20 61

**South Africa**  
 Avnet Kopp (Pty) Ltd  
 P. O. Box 3853, Rivonia, 2128  
 South Africa.  
 Phone: +27 11 444 2333  
 Fax: +27 11 444 7778

**Taiwan**  
 Industrade Co., Ltd.  
 6F, No. 64, Section 2  
 Chung Cheng Road  
 Shihlin, Taipei, Taiwan 111  
 Phone: 886-2-2836 90 11  
 Fax: 886-2-2835 30 37