

TX433-TB-300 Product Data Sheet

433MHz Copper Rod Sucker Antenna SMA-J Interface



成都亿佰特电子科技有限公司 Changdu Ebyta Electronic Technology Co. Ltd.



I. Product Introduction

TX433-TB-300 is a 433MHz copper rod sucker antenna. Height of the antenna is 210mm. With a SMA-J interface, it can be applied to such devices with frequency of 433MHz as wireless module, data transfer radio, vehicle and so on.


II. Specification and Parameters


| Physical Parameters | |
|-------------------------------|-----------------------|
| Frequency | 433MHz |
| Bandwidth | 423-443MHz |
| Gain | 5dBi |
| SWR | ≤1.5 |
| Polarization | Vertical |
| Radiation Direction | Omnidirectional |
| Input Impedance | 50 Ω |
| Power Capacity | 50W |
| Other Parameters | |
| Height | 210mm |
| Sucker Diameter | 60mm |
| Total Weight | 360g |
| Feeder Length | 3m |
| Material | Copper |
| | |
| Interface | SMA-J |
| Interface Working Temperature | SMA-J -40°C ∼+85°C |





III. Testing

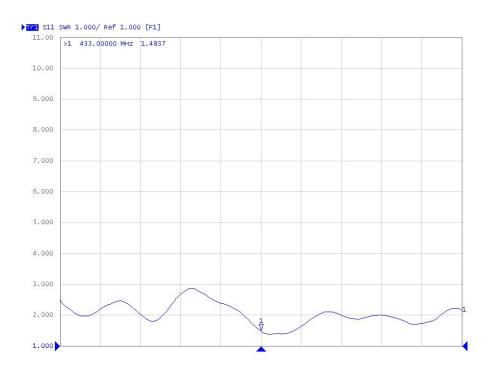

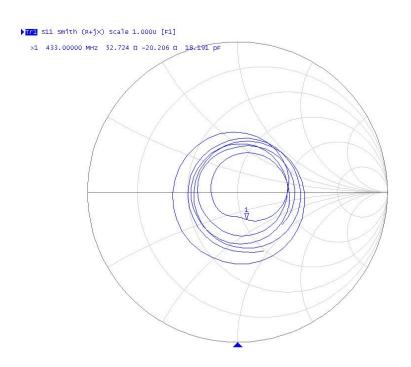



IV. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.ebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: info@cdebyte.com

Fax: 028-64146160 ext. 821

Web: www.ebyte.com

Address: Innovation Center D347, 4# XI-XIN Road, Chengdu, Sichuan, China

