| ISO9001: 2000 | ISO14001: 2004 |
|---------------|----------------|
| | |

Title. TACT SWITCH

Product Model. KAN0445

Customer's Part NO.

Customer's Model:

Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: Date:

Approved by: Date:

| APPROVE | REVIEW | POLT | | |
|---------|--------|------|--|--|
| 黄蜀东 | 关 林 | 曹 盖 | | |

WENZHOU GANGYUAN ELECTRONICS CO., LTD.



| CUSTOMER | CUSTOMER'S P/N | GYE'S P/N | PRODUCT | REVISION |
|----------|----------------|-----------|-------------|----------|
| | | KAN0445 | TACT SWITCH | А |

1、 概述

GENERAL

1.2 适用范围

APPLICATION

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

工作温度范围

Operating Temperature Range

- -20℃~70℃(在标准大气压、标准湿度条件下) -20℃~70℃ (Normal humidity, normal air pressure) 贮藏温度费国 -20°C ~70°C (Normal humidity, normal air pressure)
- 1.4 贮藏温度范围

Storage Temperature Range

- -30℃~80℃(在标准大气压、标准湿度条件下)
- -30°C~80°C (Normal humidity, normal air pressure)
- 1.5 测试条件

Test Conditions

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温·······5℃~35℃

Normal temperature······5°C~35°C

标准湿度......相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度**······20**℃±**2**℃

Temperature $\cdots 20^{\circ}$ $\pm 2^{\circ}$

相对湿度......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa~106Kpa

| APPROVE BY | 黄蜀东 09.10.25 | CHECKED BY | 关 林 09.10.25 | PRPARE BY | 曹 盖 09.10.25 |
|------------|--------------|------------|--------------|-----------|--------------|
| | | | | | |



| CUSTOMER | CUSTOMER'S P/N | GYE'S P/N | PRODUCT | REVISION |
|----------|----------------|-----------|-------------|----------|
| | | KAN0445 | TACT SWITCH | А |

详细说明

Detailed specification

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

2. 4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出: Solution of the contact arrangement: 1 pole, 1 throw 1 1 pole, 1 throw 1 1 pole, 1 throw 1

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (有效值)

Ratings: 12V DC, 50mA (effective value)

3. 电气性能:

ELECTRICAL SPECIFICATION

| 项 | 目 | | Ì | 试 验 条 件 | | | 要求 | | |
|---------------------------------------|----|----------------------------------|---|---|--|------------|-----------------------|--|--|
| ITI | EΜ | | TE | | REG | QUIREMENTS | | | |
| | | 接触电阻 | 在以 5V 10mA的 的电路中,以一个等于 Applying a static | | | | | | |
| 1 | | 按應电阻 act Resistance | the center of the stem | , measurements sha | all be made by | | ≤ 100 m Ω | | |
| | | | 5V DC 10mA or mo | re than 1KHZ AC | small-current | | | | |
| | | | contact resistance met | er. | | | | | |
| 2 | ı | 绝缘电阻 Insulation Resistance | 之间底座、盖板的电阻 Measurement sha 100V DC potential, | 在端子之间施加 DC 100V /1min 的条件下,测量端子之间底座、盖板的电阻值 Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute. | | | | | |
| 介质耐压 3 Dielectric voltage proof | | | 在端子之间施加 250V AC (50HZ of terminals, for one | | 无击穿、无飞弧 There should be breakdown and flashover | | | | |
| APPROVE BY 黄蜀东 09.10. | | | 1 25 CHECKED BY 关 林 09.10.25 PRPARE B | | | Y | 曹 盖 09.10.25 | | |



| GANGYUAN APPROVAL SPECIFICATIONS | | | | | | | | | | | |
|----------------------------------|--------------------------------------|---|--|--|--------------------------|-----------|-----|--------------|--|--|--|
| С | USTOMER | CUSTOMER' | S P/N GYE' | S P/N | PR | ODUCT | | REVISION | | | |
| | | | KAN0445 TACT SWITC | | | | | А | | | |
| | 项目 | | 试 验 条 | 件 | | | | 要求 | | | |
| | ITEM | | TEST COND | ITIONS | | | REC | QUIREMENTS | | | |
| | 4. 机械性能: MECHANICAL SPECIFICATION | | | | | | | | | | |
| 1 | 按力 Operating Force | 量开关导通所靠 Placing the sw vertical and th center of the s | 作方向放置,在开关 等的最大力度。 pitch such that the dien gradually increatem, the maximum lesshall be measured. | irection of sv sing the loa oad required | witch oper ad applied | ration is | | 2.5±0.6N | | | |
| 2 | 行程 Full Trave | 开关驱动件顶端 Placing the sw vertical and the the center of th | 开关垂直于操作方向放置,以一个等于 2 倍按力的静负荷施加在 开关驱动件顶端中心,测量顶端移动的距离。 Placing the switch such that the direction of switch operation is vertical and then applying static load of 2times operating force to he center of the stem; the travel distance for the switch to come o a stop shall be measured. | | | | | 0.2±0.1mm | | | |
| APP | ROVE BY | 黄蜀东 09.10.25 | CHECKED BY | 关 林 09. | 10.25 | PRPARE | BY | 曹 盖 09.10.25 | | | |



| | | IGTUAN | TI I I I I VAL | <u> </u> | | | | | |
|---|--------------------------------|--|---|--------------|-------|---|--|--|--|
| С | USTOMER | CUSTOMER'S P/N | GYE'S P/N | PRODUCT | | REVISION | | | |
| | | | KAN0445 | TACT SWITCH | 4 | А | | | |
| | 项目 | | 试验条件 | | | 要求 | | | |
| | ITEM | | TEST CONDITIONS | | REG | QUIREMENTS | | | |
| 3 | 回弹力 Return Force | 开关垂直于操作方向点后,测量顶端向自由位 The sample switch is operation is vertical a to the whole travel dis | 开关垂直于操作方向放置,在开关驱动件顶端中心下降至全行程后,测量顶端向自由位置转换的力度。 The sample switch is installed such that the direction of switch operation is vertical and upon depressing the stem in its center to the whole travel distance, the force of the stem to return to its free position shall be measured. | | | | | | |
| 4 | 停止强度 Stop Strength | 荷持续 1min。 Placing the switch su vertical, and then a | 开关垂直于操作方向放置,从操作方向向驱动件施加 10N 的静负荷持续 1min。 Placing the switch such that the direction of switch operation is vertical, and then a static load of 10N shall be applied in the direction of stem operation for a period of 1 min. | | | | | | |
| 5 | 手柄拔出 强度 Stem Strength | 的行程范围。 Placing the switch su vertical, and then the | 开关垂直于操作方向放置,反方向实施最大操作力,并测量手柄的行程范围。 Placing the switch such that the direction of switch operation is vertical, and then the maximum force to withstand a pull applied opposite to the direction of stem operation shall be measured. | | | | | | |
| 在以下设定条件下进行测量: Measurements shall be made following the test set forth below: (1) 焊接温度:245±5℃ Solder temperature: 245±5℃ (2) 浸入时间:2s±0.5s Immersion time: 2s±0.5s 对于其它步骤参考《GB 5095.6—86》试验 12a The other steps please refer to《GB 5095.6-86》TEST 12a | | | | | | 外涂层应均匀覆盖 c for the edge, the should cover a n 90% | | | |
| APP | ROVE BY | 黄蜀东 09.10.25 CHE | ECKED BY 关 林 09 | .10.25 PRPAR | RE BY | 曹 盖 09.10.25 | | | |



| | | | UAN | | <i>/</i> (1 1 1 1) | O V/ \L | <u> </u> | | <i>,</i> , , , , , | <u> </u> |
|---|-----------------------------------|---------------------|--|--|----------------------------|---------------------|------------------------------|---------------------------|--------------------|-----------------------------------|
| С | USTOMER | | CUSTOMER | .'S P/N | GYE' | S P/N | PI | RODUCT | | REVISION |
| | | KAN0445 TACT SWITCH | | | | | | T SWITCH | | А |
| | 项目 | | | | 试 验 | 条件 | | | L | 要求 |
| | ITEM TEST CONDITIONS | | | | | | | RE | QUIREMENTS | |
| | 限电气性能: RONMENTAL | | | | | | | | | |
| 1 | 低温测试 Resistance low tempera | to ature | 标准湿度的 Following to normal ten measurem (1) 温度 Tem (2) 时间 | 环境中 the test nperaturents are 度: -30± | ±2°0 /~\\\ e:-30±2°C | be left in h before | Contac ≤200m! 项目 3, | | | |
| 2 | 高温测试 Heat resista | ance | measurements are made: (1) 温度: 80±2℃ temperature:80±2℃ (2) 时间: 96h ≤200mΩ 项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3 | | | | | | | t resistance: Ω 4.1,4.2,4.3 |
| time: 96h 根据下面的测试要求进行 5 次循环的温度周期性测试,实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试。测试期间样品应保持干燥. After 5 cycles of following conditions, the sample shall be allowed to stand under normal temperature and humidity conditions for 1 h. and measurements shall be made. During the test water drops shall be removed. Temperature Time -10±2℃ 2(hour) -10~65℃ 1 -65±2℃ 2 -65~-10℃ 1 | | | | | | | shall be humidity de. During | Contac ≤200m 项目 3,4 | | |
| APPROVE BY 黄蜀东 09.10.25 CHECKED BY 关 林 | | | | | 关 林 0 | 9.10.25 | PRPARE | E BY | 曹 盖 09.10.25 | |



| | | | UAN | | , ,, , , | · · · · · · | <u> </u> | | | <u> </u> | |
|-----|----------------------------------|---|---|-------|----------|-------------|----------|-----------|--|--------------|--|
| С | USTOMER | (| CUSTOMER'S | S P/N | GYE' | S P/N | Р | RODUCT | | REVISION | |
| | | | | | KAN | 0445 | TAC | CT SWITCH | I | Α | |
| | | I I | | | 试 验 | 条件 | | | 1 | 要求 | |
| | ITEM TEST CONDITIONS | | | | | | | | RE | QUIREMENTS | |
| 4 | 湿温测试 Moisture resistance | ! | 样品应按照以下实验条件进行测试,实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试: Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made: (1) 温度: 60±2℃ temperature: 60±2℃ (2) 相对湿度: 90%~95% relative humidity:90% to 95% Thin: 96h time: 96h | | | | | | Contac ≤200m 项目 3, | | |
| 5 | 硫化试验 Sulfuratio resistance | n | 样品应按照以下实验条件进行测试,实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试: Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made: (1) H2S 气体浓度: 3ppm±1ppm H2S gas concentration: 3ppm±1ppm (2) 时间: 72h Time: 72h (3) 温度: 40±2℃(90~95%RH) temperature: 40±2℃(90~95%RH) | | | | | | Contac ≤200m 项目 3, | | |
| 6 | | 在以下设定条件下进行测量: The switch shall be checked after following test: (1) 温度: 35℃±2℃ temperature: 35℃±2℃ (2) 盐溶液浓度: 5±1% (质量百分比) salt solution: 5±1%(solids by mass) (3) 时间: 8h±1h Time: 8h±1 hour 实验后的盐沉积物后水冲掉 After test, salt deposit shall be removed by running water. | | | | | | No rer | 上没有腐蚀斑点 markable corrosion be recognized in part. | | |
| APP | APPROVE BY 黄蜀东 09.10.25 | | | | CKED BY | 关 林 09. | 10.25 | PRPAR | E BY | 曹 盖 09.10.25 | |



| | | NG 1 | UAIT | / \ | <u> </u> | <u> </u> | | 7 11 10 | 7110 | |
|--------------------------------------|-------------------|-------|--|---|------------------------------|----------|-----------|--|---|--|
| С | USTOMER | (| CUSTOMER'S F | P/N GYE' | S P/N | P | RODUCT | | REVISION | |
| | | | | KAN | 0445 | TAC | CT SWITCH | | Α | |
| 6、极限机械性能: ENDURANCE SPECIFICATION | | | | | | | | | | |
| | 项目 | | | 试 验 | 条 件 | | | | 要求 | |
| | ITEM | | | TEST CON | IDITIONS | | | RE | QUIREMENTS | |
| | 工作寿命 Operation | | | | | | | | | |
| 1 | WE | | Measurement (1) DC 12V DC 12V (2) 按动速率 Rate of (3) 极力: Operat | 式要求进行测试: shall be made fol y, 50mA 带负载 y, 50 mA resistive : 1 次/秒 f operation: 1 time 按力的 1.5 倍 ting Force: Op 故障寿命: 50000 ge fault-free life:50 | load es/s erating Forc | e1.5dou | N C | resistar 接力: Operati initial va 项目 3,4 | 阻≤200mΩContact nce≤200mΩ 初值的±30% ng Force: alue±30% 4.1,4.2,4.3 4.1,4.2,4.3 | |
| 2 | 振动 Vibra | tion | 根据以下给定条件进行测试: Measurement shall be made following the test set forth below: (1) 振动频率范围: 10~55~10Hz Vibration frequency range: 10 to 55 to 10Hz (2) 振幅(峰一峰): 1.5mm Amplitude: 1.5mm (3) 振动方向:包括手柄行程方向在内的三个相互垂直的方向 Direction of vibration:Three mutually perpendicular | | | | | | 4.1,4.2,4.3 4.1,4.2,4.3 | |
| | | | (4) 测试时 | ion including the d 计间:每次 2hours ion: Each 2hours | | | Ci | | | |
| _ | 接条件: ERING CON | DITIO | NS: | | | | | | | |
| 7.1 手工焊接 Hand soldering F | | | | 情按以下条件进行焊接: 1) 焊锡温度: ≤350℃ 2) 连续焊接时间: ≤3 s Please practice according to below conditions: 1) Soldering temperature: 350℃ Max. 2) Continuous soldering time: 3 s Max. | | | | | | |
| APP | ROVE BY | 黄蜀 | 东 09.10.25 | CHECKED BY | 关 林 09. | 10.25 | PRPARI | E BY | 曹 盖 09.10.25 | |



| CUSTOMER | CUSTOMER'S P/N | GYE'S P/N | PRODUCT | REVISION |
|--------------------------------|------------------------------|-----------------------------------|----------------|---|
| | | KAN0445 | TACT SWITCH | A |
| 项目 | | 推着 | 茅条 件 | |
| ITEM | | Recommen | ded conditions | |
| 回流焊时 7.2 Conditions for reflow | 温度 (*C) 180 - 150 - | 120sec max.(预 3 to 4 m 炉内通过 | 热) 40s | 60°C max. 3sec max. 30°C ———————————————————————————————————— |

说明: 1.1 开关浸焊后,注意不要用溶剂清洗。

After switches were soldered, please be careful not to clean switches with solvent

1.2 在使用烙铁的情况下,焊锡温度应在 380℃以下、3 秒以内。 In the case of using solding iron, solding conditions shall be 380℃ max and 3 sec.max.

1.3 浸焊后,注意不要在顶部施加负荷。


Right after switches were soidered; please be careful not to load to on the knobs of switches.

- 2 设计中应注意的事项(Design instructions):
- 2.1 印刷基板的安装孔尺寸参见产品图。
 Follow recommended P.W.B. piercing plan in outside drawing page.
- 3 注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关 Please be cautions not to give excessive static load or shock to swiches.
- 3.2 开关浸焊后,印刷基板注意不要叠放。 Please be careful not to pile up P.W.B.after switches were soldered
- 3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要打开包装箱。 Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially . When you need to preserve for a long period ,do not open the carton .

| APPROVE BY | 黄蜀东 09.10.25 | CHECKED BY | 关 林 09.10.25 | PRPARE BY | 曹 盖 09.10.25 |
|------------|--------------|------------|--------------|-----------|--------------|



| CUSTOMER | CUSTOMER'S P/N | GYE'S P/N | PRODUCT | REVISION |
|----------|----------------|-----------|-------------|----------|
| | | KAN0445 | TACT SWITCH | Α |

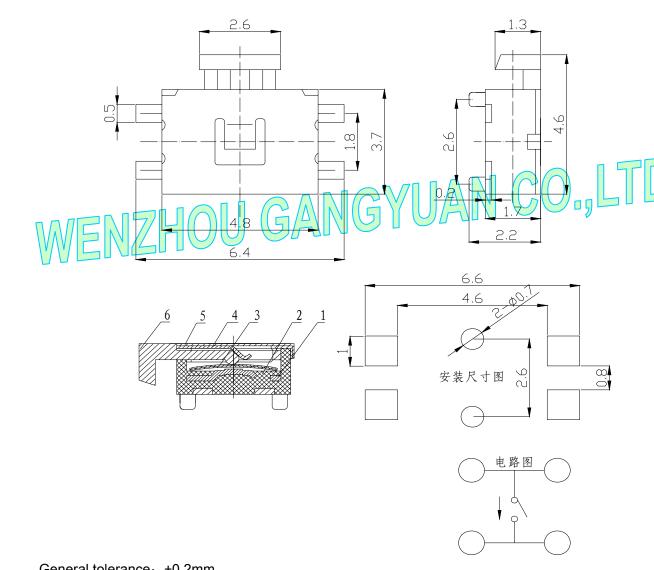

General tolerance: ±0.2mm

| | NO. | NAME | MATERIAL | NATIONALITY | QTY. | FINIS | SHING | |
|------|---------|-----------------|------------|-------------|--------|--------------|----------------|--------|
| | 1 | TERMINAL | Brass | China | 1 | Silver | plating | |
| | 2 | CASE | FR52 | USA | 1 | Black | | |
| | 3 | CONTACT | STS 301 | Korea | 1 | Contact side | silver plating | |
| | 4 | Damp Proof Tape | PI | China | 1 | | | |
| | 5 | COVER | SUS 301 | Korea | 1 | | | |
| | 6 | STEM | FR52 | USA | 1 | BI | ack | |
| APPF | ROVE BY | 黄蜀东 09.10.25 | CHECKED BY | / 关林09.10 |).25 F | PRPARE BY | 曹 盖 09.10.2 | 25 |