





IP65 IP67 P [H c Nus FC

Features

- Wide input range 180 ~ 528VAC
- · Constant Voltage + Constant Current mode output
- · Metal housing with Class I design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming (dim-to-off); Timer dimming
- Typical lifetime>50000 hours
- 5 years warranty


■ Applications

- · LED street lighting
- · LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

Description

HVG-100 series is a 100W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HVG-100 operates from $180\sim528$ VAC and offers models with different rated voltage ranging between 15V and 54V. Thanks to the high efficiency up to 91%, with the fanless design, the entire series is able to operate for $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$ case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HVG-100 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

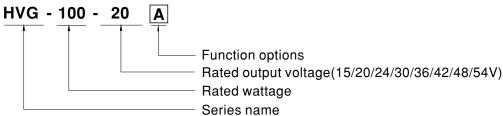

Type	IP Level	Function	Note
Α	IP65	Io and Vo adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Built-in Smart timer dimming function by user request.	By request


100W Constant Voltage + Constant Current LED Driver

SPECIFICATION

MODEL		HVG-100-15	HVG-100-20	HVG-100-24	HVG-100-30	HVG-100-36	HVG-100-42	HVG-100-48	HVG-100-54
	DC VOLTAGE	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.4	9~15V	10~20V	12~24V	15~30V	18~36V	21~42V	24~48V	27~54V
оитрит -	RATED CURRENT	5A	4.8A	4A	3.2A	2.65A	2.28A	2A	1.77A
	RATED POWER	75W	96W	96W	96W	95.4W	95.76W	96W	95.58W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
		Adjustable for A	/AB-Type only (v	ria the built-in po	tentiometer)				
	VOLTAGE ADJ. RANGE	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V
			/AB-Type only (v	ria the built-in po	tentiometer)			-	
	CURRENT ADJ. RANGE	2.75 ~ 5A	2.64 ~ 4.8A	2.2 ~ 4A	1.76 ~ 3.2A	1.45 ~ 2.65A	1.25 ~ 2.28A	1.1 ~ 2A	0.97 ~ 1.77A
	VOLTAGE TOLERANCE Note.3		±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
				C. 480VAC	1	I	I.		
	HOLD UP TIME (Typ.)	.6 500ms, 80ms /230VAC, 347VAC, 480VAC 30ms/347VAC, 480VAC							
	TIOLD OF TIME (Typ.)								
	VOLTAGE RANGE Note.5	180 ~ 528VAC 254VDC ~ 747VDC (Please refer to "STATIC CHARACTERISTIC" section)							
	FREQUENCY RANGE	47 ~ 63Hz							
	TREGEROTRANCE								
	POWER FACTOR (Typ.)	$PF \ge 0.98/230VAC$, $PF \ge 0.98/277VAC$, $PF \ge 0.97/347VAC$, $PF \ge 0.93/480VAC$ @full load							
		(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) THD< 20%(@ load≥50%/230VAC, 277VAC, 347VAC [@ load≥60% only for 15V model]; @ load≥75%/480VAC)							
INPUT	TOTAL HARMONIC DISTORTION	٠, ٠			47 vAC [@ load 』 TON (THD)" sect	•	ov illodelj, @ lo	au	40)
INFOI	EFFICIENCY (Typ.)	89%	90%	91%	91%	90.5%	90.5%	91%	91%
	AC CURRENT (Typ.)	0.38A / 347VAC			3170	90.576	90.576	9170	9170
·	INRUSH CURRENT (Typ.)				Incak) at 480\/AC	Por NEMA 410			
	MAX. No. of PSUs on 16A	COLD START 25A(twidth=900µs measured at 50% Ipeak) at 480VAC; Per NEMA 410							
	CIRCUIT BREAKER	5 units (circuit b	reaker of type B) / 8 units (circui	it breaker of type	C) at 480VAC			
	LEAKAGE CURRENT	<0.75mA / 480VAC							
		95 ~ 108%							
	OVER CURRENT	Constant current limiting, recovers automatically after fault condition is removed							
	SHORT CIRCUIT				after fault condit				
PROTECTION		18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 60V	59 ~ 65V
	OVER VOLTAGE	Shut down o/p voltage with auto-recovery or re-power on to recovery							
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down							
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)							
	MAX. CASE TEMP.	Tcase=+90°C							
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH no	on-condensing						
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10							
	TEMP. COEFFICIENT	±0.03%/°C (0							
	VIBRATION	,		period for 72min	a each along Y V	7 2 2 2 2			
	SAFETY STANDARDS								
	WITHSTAND VOLTAGE					oo or ir or appro	veu		
SAFETY &		I/P-O/P:3.75KVAC							
EMC	ISOLATION RESISTANCE		-				-d-1) - ENC4000 2 2	COC Dark 15 Cultura	-+ D FAC TD TC 000
	EMC EMISSION			,,-	≧50% load,@ load≧	•	•		
	EMC IMMUNITY	•			17, light industry le	evei (surge immun	ity Line-Earth 4K	v, Line-Line 2Kv)	, EAC IP IC 020
l +	MTBF	174.9K hrs min		17F (25 C)					
OTHERS	DIMENSION	236*68*38.8mn		т					
	PACKING		15.2Kg/0.74CUF		tod lood and OF°	af ambient ten	mm a rati ira		
NOTE	 All parameters NOT specially mentioned are measured at 347VAC input, rated load and 25°C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance: includes set up tolerance, line regulation and load regulation. Please refer to "DRIVING METHODS OF LED MODULE". De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to) point (or TMP, per DLC), is about 80°C or less. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com. 								
	The ambient temperature of For any application note an https://www.meanwell.com/	lerating of 3.5° C and IP water proof	1000m with fanl function installa	ess models and	d of 5°C/1000m v	vith fan models t	e using.	tude higher than	


■ Block Diagram

Fosc: 80KHz

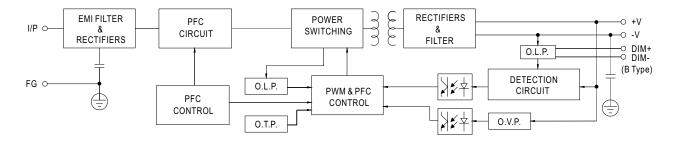

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

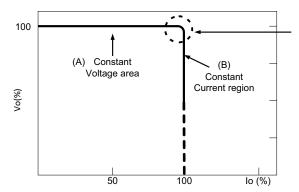


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION




imes 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- · Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 0 ~ 10VDC

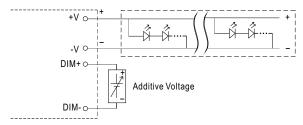


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

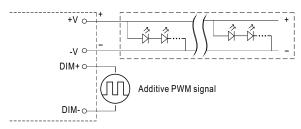



"DO NOT connect "DIM- to -V"


 \bigcirc Applying additive resistance:

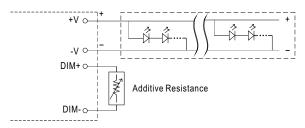

"DO NOT connect "DIM- to -V"









Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.




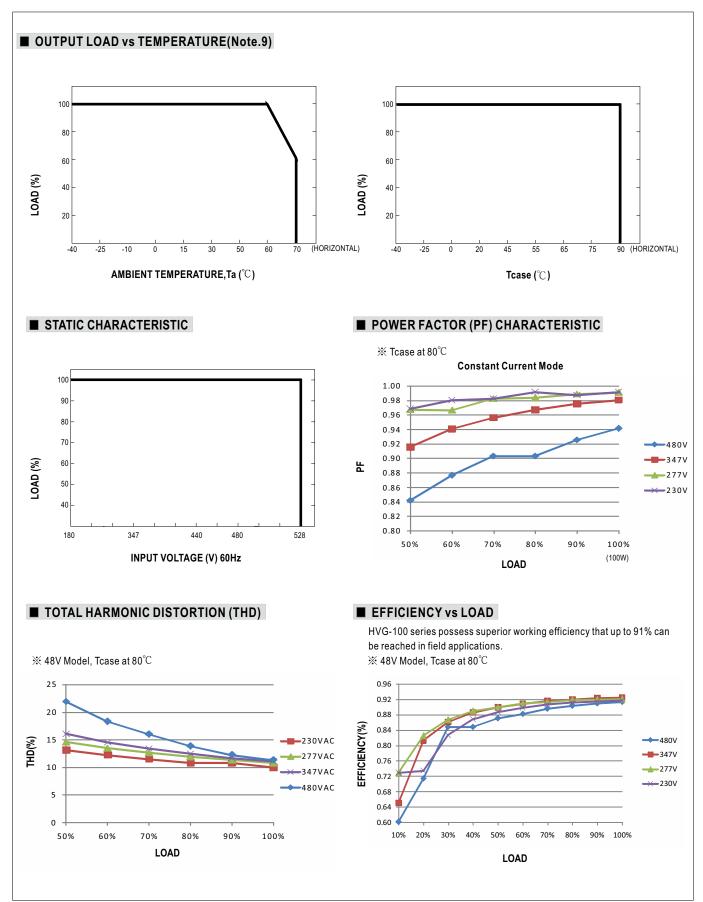


■ LIFE TIME

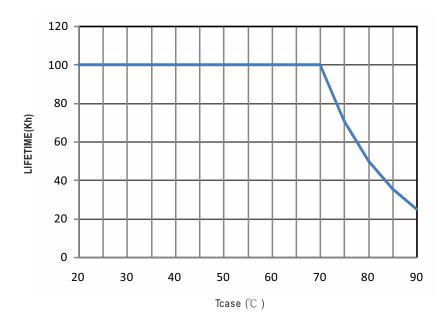

HVG-100 series

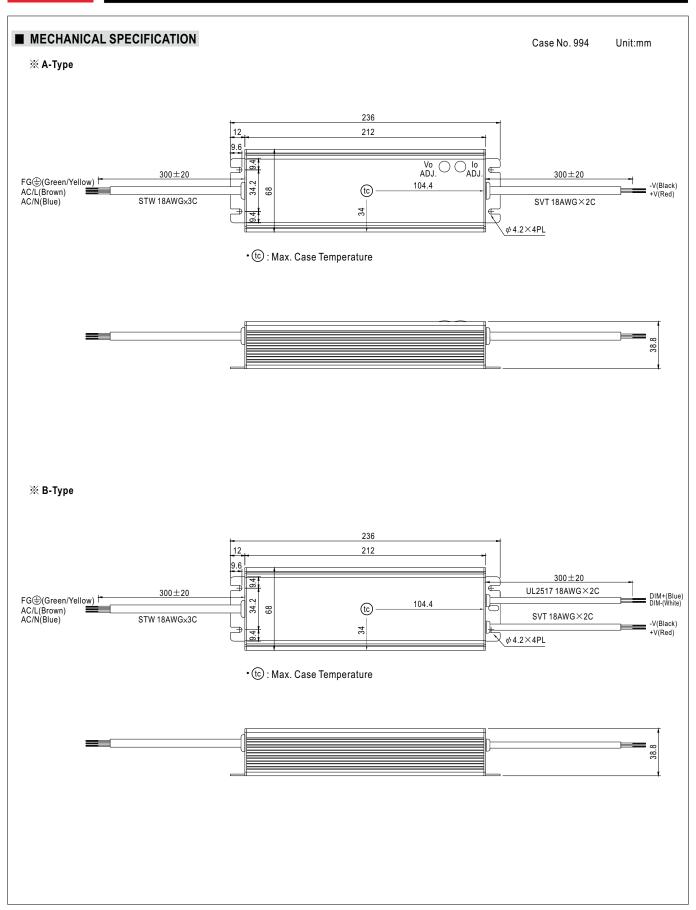

HVG-100 series

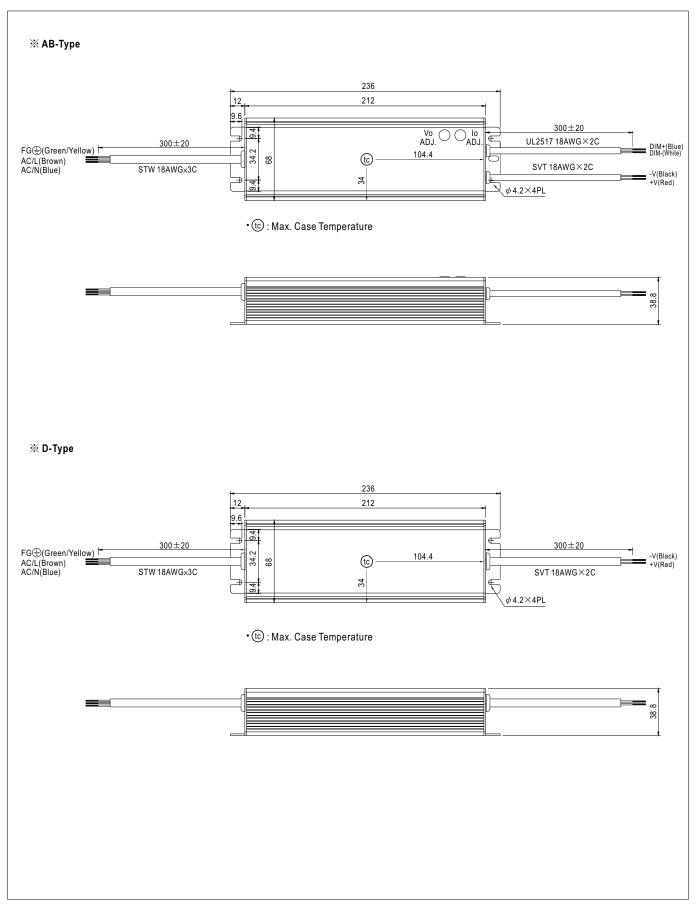


100W Constant Voltage + Constant Current LED Driver

■ WATERPROOF CONNECTION


Waterproof connector

 $Waterproof connector \ can \ be \ assembled \ on \ the \ output \ cable \ of \ HVG-100 \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$




Size	Pin Configuration (Female)			
M12	000	000		
IVITZ	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)		
M15	00		
IVITO	2-PIN		
	12A/PIN		
Order No.	M15-02		
Suitable Current	12A max.		




※ Cable Joiner

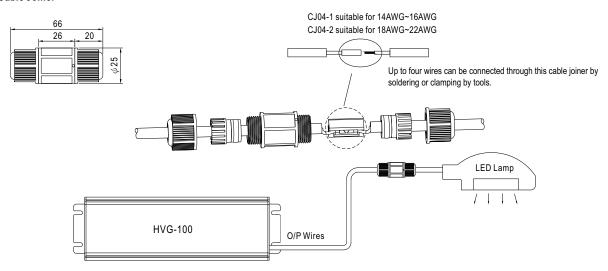

CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

※ Junction Box Option

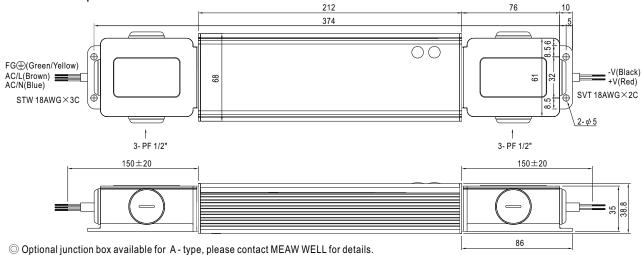

■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html