



















Features

- Wide input range 100~305VAC(Class I)
- Full power output at 70~100% Constant power mode operation
- Metal case with IP67, suitable for outdoor application
- · LVLE (H type) Class 2 (24V) power unit
- Surge protection with 6KV/4KV (10KV/6KV optional)
- 3 in 1 dimming function (Dim to off and Isolation design)
- India (EESL) version with Input Over Voltage Protection can survive input voltage stress of 440Vac for 48 hours
- Protection functions: OVP/SCP/OCP/OTP
- Life time >50,000 hrs. and 5 years warranty


Applications

- Skyscraper lighting
- · Street lighting
- · Floodlight Lighting
- Stage lighting
- Fishing lighting
- · Horticulture lighting
- · Bay lighting
- DMX power supply
- Type HL for use in class I , Division 2

Description

XLG-100 series is a 100W LED AC/DC driver featuring the constant power mode.XLG-100 operates from 100~305VAC and offers models with different rated current ranging between 700mA and 8000mA. Thanks to the high efficiency up to 92%, with the fanless design, the entire series is able to operate for - 40° C ~+90 $^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world. XLG-100 series comply with the latest version of IEC61347/GB7000.1-2015 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both user and luminaire system during installation.

Model Encoding

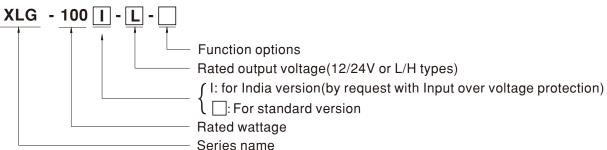

Type	Function	Note
Blank	Io and Vo fixed. (For harsh environment)	By request
Α	lo adjustable via built-in potentiometer	In Stock
AB	Io adjustable via built-in potentiometer +3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock

Note: 12V and 24V models without the AB type



SPECIFICATION

		T		T.				
MODEL		XLG-100□-12-□		XLG-100□-24-□				
DC VOLTAGE		12V		24V				
	CONSTANT CURRENT REGION Note.2	8.4~ 12V		16.8~ 24V				
	RATED CURRENT	8A		4A				
	RATED POWER	96W		96W				
	RIPPLE & NOISE (max.) Note.3	150mVp-p		240mVp-p				
	CURRENT ADJ RANGE	Adjustable for A/AB-Type only (via the	built-in potentiometer)					
		4 ~ 8A		2~4A				
OUTPUT	VOLTAGE TOLERANCE Note.4			±2.0%				
	LINE REGULATION	±0.5%		±0.5%				
	LOAD REGULATION	±2%		±1%				
	SETUP, RISE TIME Note.6	500ms, 100ms/230VAC, 1200ms, 100	0ms/115VAC					
	HOLD UP TIME (Typ.)	12ms/ 230VAC 12ms/ 115VAC						
	VOLTAGE RANGE Note.5	100 ~ 305VAC 142 ~ 431VDC						
		(Please refer to "STATIC CHARACTERISTIC" section)						
	FREQUENCY RANGE	47 ~ 63Hz						
	POWER FACTOR	PF≥0.97/115VAC, PF≥0.95/230VAC,						
	TOTAL HARMONIC DISTORTION	THD< 10%(@load≧50%/115VC,230\	VAC; @load≤/5%/2//VA	· · · · · · · · · · · · · · · · · · ·				
INPUT	EFFICIENCY (Typ.)	92%	40.4 (0.33) (4.0	92%				
	AC CURRENT		.42A/277VAC					
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=300µs mea	sured at 50% Ipeak) at 23	30VAC; Per NEMA 410				
	MAX. No. of PSUs on 16A	8units (circuit breaker of type B) / 14 u	units (circuit breaker of ty	pe C) at 230VAC				
	CIRCUIT BREAKER	, ,,	, , , , , , , , , , , , , , , , , , , ,	. ,				
	LEAKAGE CURRENT	<0.75mA / 277VAC						
	NO LOAD POWER CONSUMPTION	No load power consumption <0.5W(for standard version)						
	OVER CURRENT	95 ~ 108%						
	OVER CURRENT	Hiccup mode or Constant current limit	ting, recovers automatical	ly after fault condition i	s removed			
	SHORT CIRCUIT	Hiccup mode or Constant current limiti	ing, recovers automatical	ly after fault condition is	s removed			
PROTECTION	01/50 1/01 74 05	13.5 ~ 18V		27 ~ 34V				
	OVER VOLTAGE	Shut down output voltage, re-power	on to recover					
	INPUT OVER VOLTAGE Note.7	320 ~ 390VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is removed						
	IN OT OVER VOLTAGE Hote./	Can survive input voltage stress of 440Vac for 48 hours @ tc 75°C max						
	OVER TEMPERATURE	Shut down output voltage, re-power	on to recover					
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)						
	MAX. CASE TEMP.	Tcase=+90°C						
	WORKING HUMIDITY	20 ~ 95% RH non-condensing						
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +90°C, 10 ~ 95% RH						
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)						
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes						
	SAFETY STANDARDS Note.7	UL8750(type"HL"), UL879, CSA C22.2 No. 250.13-12; ENEC EN61347-1, EN61347-2-13 independent, EN62384; GB19510.1, GB19510.14 EAC TP TC 004;J61347-1(H29), J61347-2-13(H29), KC61347-1, KC61347-2-13, IS15885(Part2/Sec13)(for XLG-1001 type only);						
	WITHOTAND VOLTAGE	NOM-058-SCFI-2017(except for Blank type); IP67 approved I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC						
	WITHSTAND VOLTAGE							
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms		KH				
		Parameter	Standard		Test Level/Note			
		Conducted	EN55015(CISPR1	*				
	EMC EMISSION	Radiated	EN55015(CISPR1	, .				
		Harmonic Current	EN61000-3-2, GB	/T17625.1	Class C @load≥50%			
EMC		Voltage Flicker	EN61000-3-3					
SAFETY &		EN61547						
		Parameter	Standard		Test Level/Note			
		ESD Particular	EN61000-4-2		Level 3, 8KV air ; Level 2, 4KV contact			
	EMO IMPANAMENT	Radiated	EN61000-4-3		Level 3			
	EMC IMMUNITY	EFT/Burst	EN61000-4-4		Level 3			
		Surge	EN61000-4-5		4KV/Line-Line 6KV/Line-Earth(6K/10K option			
		Conducted	EN61000-4-6		Level 3			
		Magnetic Field	EN61000-4-8		Level 4			
		Voltage Dips and Interruptions	EN61000-4-11		>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
	MTBF	1006.16K hrs min. Telcordia SR-332 (Bellcore); 276.37Khrs min. MIL-HDBK-217F (25°C)						
OTHERS	DIMENSION	140*63*32mm (L*W*H)						
	PACKING	0.58Kg;24pcs /15Kg /0.85CUFT						
NOTE		mentioned are measured at 230VAC inpo THODS OF LED MODULE". at 20MHz of bandwidth by using a 12" tw		•				



SPECIFICATION

MODEL		XLG-100L	XLG-	100 🔲-H- 🗌				
	RATED CURRENT	700mA	2100	nA				
	RATED POWER	100W	100W					
	CONSTANT CURRENT REGION	71 ~ 142V	27 ~ :	6V				
	FULL POWER CURRENT RANGE	700~1050mA	1750	-2780mA				
OUTPUT	OPEN CIRCUIT VOLTAGE (max.)	149V	60V					
	CURRENT ADJ. RANGE	350~1050mA	875~	2780mA				
	CURRENT RIPPLE	3.0%(@rated current)	<u>'</u>					
	CURRENT TOLERANCE	±5%						
	SET UP TIME	500ms/230VAC, 1200ms/115VAC						
		100 ~ 305VAC 142VDC ~ 431VDC						
	VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERIS	STIC" ang " DRIVING METHO	DS OF LED MODULE"section)			
	FREQUENCY RANGE	47 ~ 63Hz						
		PF≥0.97 / 115VAC, PF≥0.95 / 230VAC, PF≥0.92 / 277VAC at full load						
	POWER FACTOR (Typ.)	(Please refer to "Power Factor Character						
		THD< 10% (@ load≥50% at 115VAC/2		7VAC)				
	TOTAL HARMONIC DISTORTION	THD<10% (@ load ≥ 50% at 115VAC/230VAC ,@ load ≥ 75% at 277VAC) Please refer to "TOTAL HARMONIC DISTORTION (THD)" section						
INPUT	EFFICIENCY (Typ.)	92.5%	91%					
01	AC CURRENT (Typ.)	1.1A / 115VAC 0.5A / 230VAC	0.42A / 277VAC					
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=300µs measured		VEMA 410				
		COLD CIVILLY CONTENIAN COOKS MODERATOR	2 at 00 /0 speak) at 200 v/ to, 1 of	TEMP (110				
	MAX. NO. of PSUs on 16A CIRCUIT BREAKER	8 unit(circuit breaker of type B) / 14 units	s(circuit breaker of type C) at 2	30VAC				
	LEAKAGE CURRENT	<0.75mA / 277VAC						
		VI.7311A7 277 VAC						
	STANDBY POWER CONSUMPTION	Standby power consumption <0.5W	for AB-Type(Dimming OF	F)(for standard version)				
	OVER POWER	105 ~ 150%						
	OVERPOWER	Hiccup mode, recovers automatically aft	er fault condition is removed					
	SHORT CIRCUIT	Hiccup mode or Constant current limiting	g, recovers automatically after	fault condition is removed				
PROTECTION	OVERVOLTAGE	160 ~ 220V	66~9	0V				
PROTECTION	OVER VOLTAGE	Shut down output voltage, re-power on to recover						
		320 ~ 390VAC (Shut down output voltage when the input voltage exceeds protection voltage recovers automatically after fault condition is removed						
	INPUT OVER VOLTAGE Note.7	Can survive input voltage stress of 440Vac for 48 hours @ tc 75°C max						
	OVER TEMPERATURE	Shut down output voltage, re-power on to recover						
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OU"	TPUT LOAD vs TEMPERATUR	E" section)				
	MAX. CASE TEMP.	Tcase=+90°C						
	WORKING HUMIDITY	20 ~ 95% RH non-condensing						
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH non-condensing						
	TEMP. COEFFICIENT	±0.03%/℃ (0~60°C)	-					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period fo	r 72min, each along X, Y, Z a	es				
		UL8750(type"HL"), CSA C22.2 No. 250.13-12; ENEC EN61347-1, EN61347-2-13 independent, EN62384; GB19510.1, GB19510.14						
	SAFETY STANDARDS Note.7	EAC TP TC 004;J61347-1(H29), J61347-2-13(H29),KC61347-1,KC61347-2-13, IS15885(Part2/Sec13)(for XLG-1001 type only);						
		NOM-058-SCFI-2017(except for Blank type); IP67 approved						
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC						
SAFETY &	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms /	500VDC / 25°C / 70% RH					
EMC		Parameter	Standard	Test Level	Note			
		Conducted	EN55015(CISPR15),GB					
	EMC EMISSION	Radiated	EN55015(CISPR15),GB					
	EMC EMISSION	Harmonic Current	EN61000-3-2 ,GB/T1762		nad>50%			
		Voltage Flicker	EN61000-3-3		044=00 /0			
	EMC IMMUNITY	EN61547	LINO 1000-3-3					
		Parameter	Standard	Test Level	Mata			
		ESD	EN61000-4-2		air ; Level 2, 4KV contact			
					all , Level 2, 4NV contact			
		Radiated	EN61000-4-3	Level 3				
		EFT/Burst	EN61000-4-4	Level 3	a CIVIII in a Fault (CIVIANIA			
		Surge	EN61000-4-5		e 6KV/Line-Earth(6K/10K option			
		Conducted	EN61000-4-6	Level 3				
		Magnetic Field	EN61000-4-8	Level 4				
		Voltage Dips and Interruptions	EN61000-4-11		5 periods, 30% dip 25 periods, ptions 250 periods			
	<u> </u>	1006.16K hrs min. Telcordia SR-332 (Bellcore); 276.37Khrs min. MIL-HDBK-217F (25°C)						
	MTBF							
OTHERS	DIMENSION							
OTHERS		140*63*32mm (L*W*H) 0.58Kg;24pcs /15Kg /0.85CUFT						

- 2. Please refer to "DRIVING METHODS OF LED MODULE".

 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

 4. Tolerance : includes set up tolerance, line regulation and load regulation.

 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.

 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.

 7. Input voltage only for XLG-100 I series, and I series without IU/CSA certificate.

 8. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

 9. The ambient temperature derating of 3.5°C/1000m with faniless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com

 11. This series meets the typical life expectancy of >50,000 hours of operation when Tease, particularly (© point (or TMP, per DLC), is about 80°C or less.

 12. Products sourced from the Americas regions may not have the PSE/CCC/BIS/KC (900. Please contact your MEAN WELL sales for more information.

 13. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf

 14. To fulfill requirements of the latest EfP regulation for lighting fixture, this LED driver can only be used behind a switch without permanently connected to the


- 14. To fulfill requirements of the latest ErP regulation for lighting fixture, this LED driver can only be used behind a switch without permanently connected to the mains.

 15. If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details.




■ BLOCK DIAGRAM

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

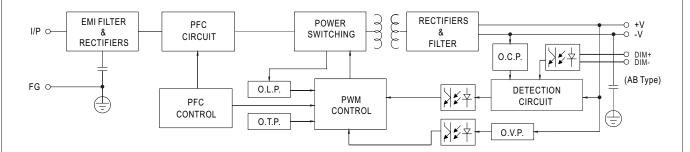


■ DRIVING METHODS OF LED MODULE

% I-V Operating Area

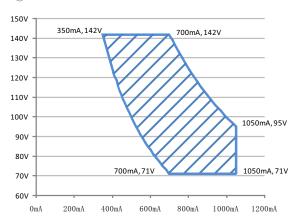


Recommend Performance Region

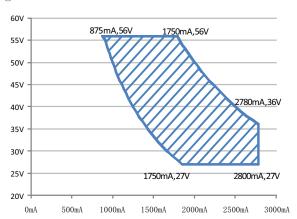

Recommend Performance Region

◎ XLG-100-12,24


※ This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

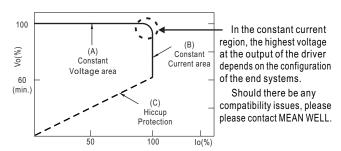

Typical output current normalized by rated current (%)




■ DIMMING OPERATION

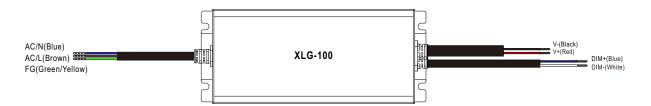


※ 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)

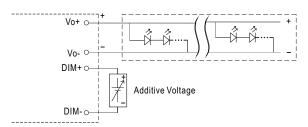


"DO NOT connect "DIM- to Vo-"

Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

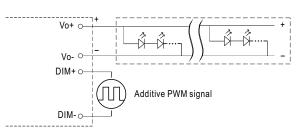



"DO NOT connect "DIM- to Vo-"


Applying additive resistance:

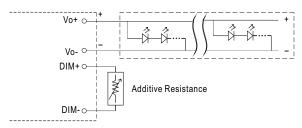

"DO NOT connect "DIM- to Vo-"









Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



■ OUTPUT LOAD vs TEMPERATURE

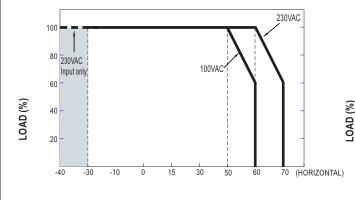

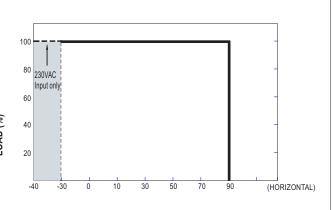

AMBIENT TEMPERATURE,Ta (°C)

Tcase (°C)

If XLG-100 operates in Constant Current mode with the rated current the maximum workable Ta is 60° C (Typ. 230VAC) or 50° C (Typ. 100VAC) Below 110VAC@ -30 $^{\circ}$ C may retry to 2nd setup


■ STATIC CHARACTERISTIC


■ POWER FACTOR (PF) CHARACTERISTIC

※ Tcase at 75°

C

Constant Current Mode

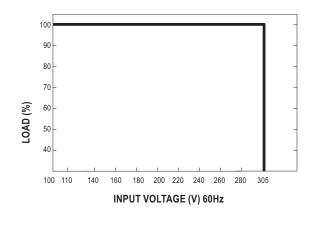

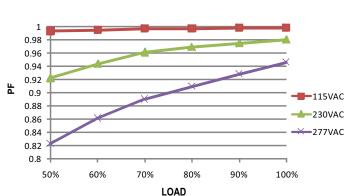


■ TOTAL HARMONIC DISTORTION (THD)


■ EFFICIENCY vs LOAD

※ XLG-100-L Model, Tcase at 75

°C


XLG-100 series possess superior working efficiency that up to 92.5% can be reached in field applications.

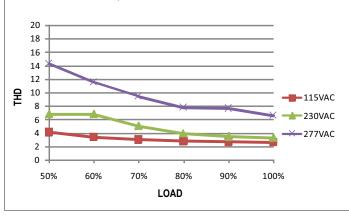

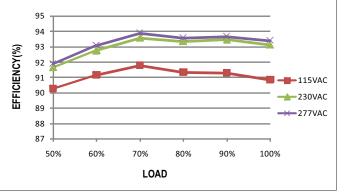




■ LIFE TIME

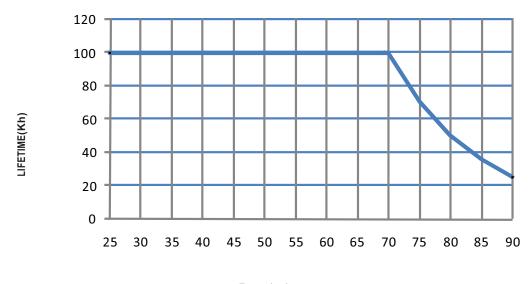


Tcase ($^{\circ}\!\mathbb{C}$)



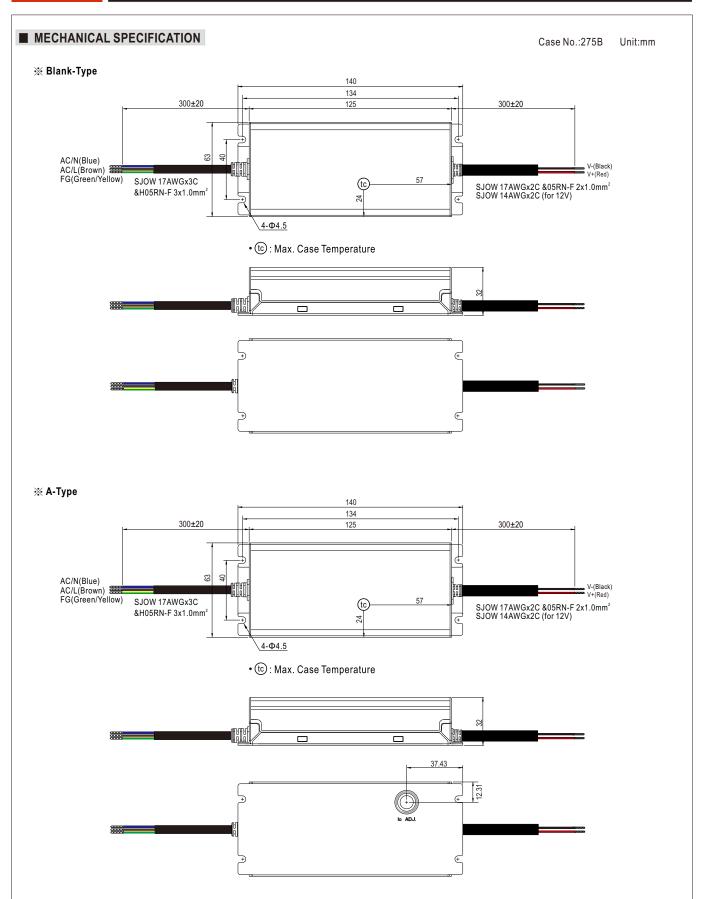




※ AB-Type

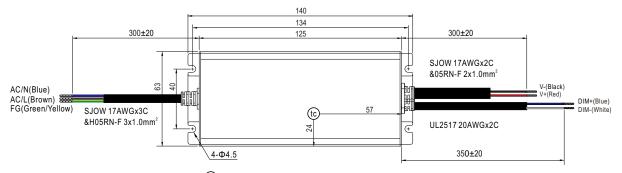

• tc : Max. Case Temperature

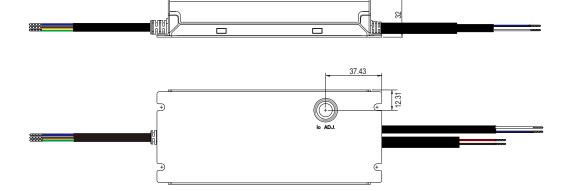

■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html