


DATA SHEET

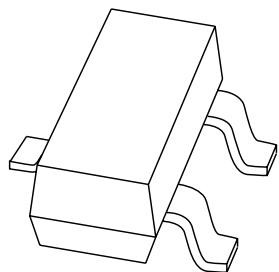

BCW29; BCW30 PNP general purpose transistors

Product data sheet
Supersedes data of 1999 Apr 13

2004 Jan 13

PNP general purpose transistors**BCW29; BCW30****FEATURES**

- Low current (max. 100 mA)
- Low voltage (max. 32 V).

APPLICATIONS

- General purpose switching and amplification.

DESCRIPTION

PNP transistor in a SOT23 plastic package.
NPN complements: BCW31 and BCW32.

MARKING

TYPE NUMBER	MARKING CODE ⁽¹⁾
BCW29	C1*
BCW30	C2*

Note

1. * = p : Made in Hong Kong.
- * = t : Made in Malaysia.
- * = W : Made in China.

PINNING

PIN	DESCRIPTION
1	base
2	emitter
3	collector

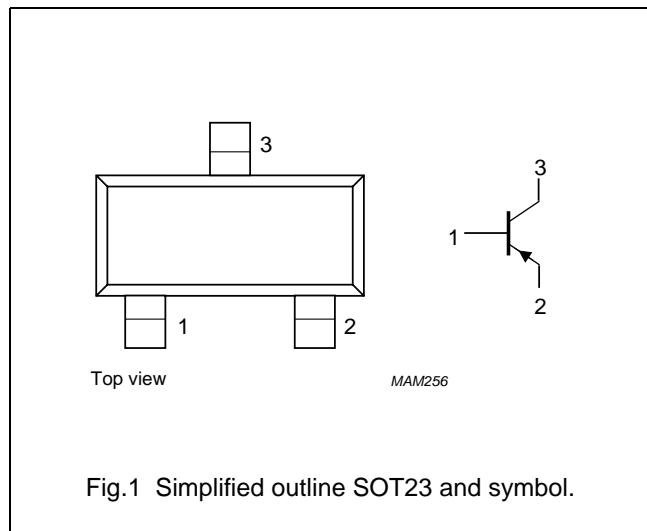


Fig.1 Simplified outline SOT23 and symbol.

ORDERING INFORMATION

TYPE NUMBER	PACKAGE		
	NAME	DESCRIPTION	VERSION
BCW29	-	plastic surface mounted package; 3 leads	SOT23
BCW30			

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	–32	V
V_{CEO}	collector-emitter voltage	open base; $I_C = -2 \text{ mA}$	–	–32	V
V_{EBO}	emitter-base voltage	open collector	–	–5	V
I_C	collector current (DC)		–	–100	mA
I_{CM}	peak collector current		–	–200	mA
I_{BM}	peak base current		–	–200	mA
P_{tot}	total power dissipation	$T_{amb} \leq 25^\circ\text{C}$	–	250	mW
T_{stg}	storage temperature		–65	+150	°C
T_j	junction temperature		–	150	°C
T_{amb}	operating ambient temperature		–65	+150	°C

PNP general purpose transistors

BCW29; BCW30

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th(j-a)}$	thermal resistance from junction to ambient	note 1	500	K/W

Note

- Transistor mounted on an FR4 printed-circuit board.

CHARACTERISTICS

 $T_j = 25^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0; V_{CB} = -32 \text{ V}$	—	—	-100	nA
		$I_E = 0; V_{CB} = -32 \text{ V}; T_j = 100^\circ\text{C}$	—	—	-10	μA
I_{EBO}	emitter cut-off current	$I_C = 0; V_{EB} = -5 \text{ V}$	—	—	-100	nA
h_{FE}	DC current gain BCW29 BCW30	$I_C = -10 \mu\text{A}; V_{CE} = -5 \text{ V}$	—	90	—	
	DC current gain BCW29 BCW30	$I_C = -2 \text{ mA}; V_{CE} = -5 \text{ V}$	120 215	— —	260 500	
V_{CEsat}	collector-emitter saturation voltage	$I_C = -10 \text{ mA}; I_B = -0.5 \text{ mA}$	—	-80	-300	mV
		$I_C = -50 \text{ mA}; I_B = -2.5 \text{ mA}$	—	-150	—	mV
V_{BEsat}	base-emitter saturation voltage	$I_C = -10 \text{ mA}; I_B = -0.5 \text{ mA}$	—	-720	—	mV
		$I_C = -50 \text{ mA}; I_B = -2.5 \text{ mA}$	—	-810	—	mV
V_{BE}	base-emitter voltage	$I_C = -2 \text{ mA}; V_{CE} = -5 \text{ V}$	-600	—	-750	mV
C_c	collector capacitance	$I_E = I_e = 0; V_{CB} = -10 \text{ V}; f = 1 \text{ MHz}$	—	4.5	—	pF
f_T	transition frequency	$I_C = -10 \text{ mA}; V_{CE} = -5 \text{ V}; f = 100 \text{ MHz}$	100	—	—	MHz
F	noise figure	$I_C = -200 \mu\text{A}; V_{CE} = -5 \text{ V}; R_S = 2 \text{ k}\Omega; f = 1 \text{ kHz}; B = 200 \text{ Hz}$	—	—	10	dB


PNP general purpose transistors

BCW29; BCW30

PACKAGE OUTLINE

Plastic surface-mounted package; 3 leads

SOT23

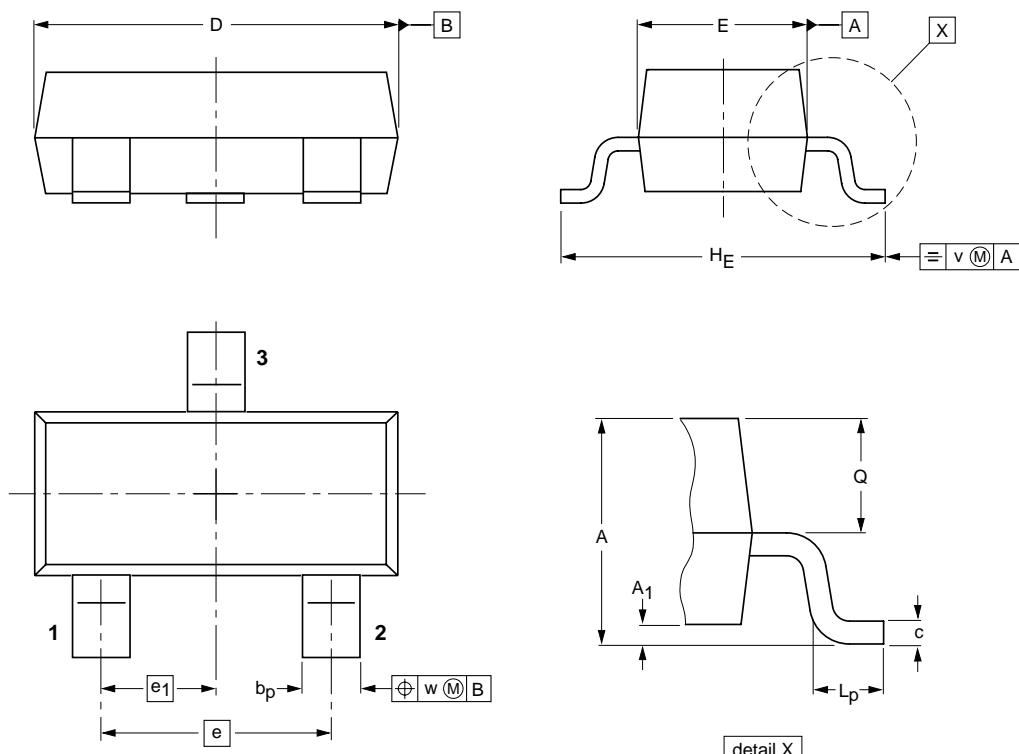

0 1 2 mm
scale

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ max.	b _p	c	D	E	e	e ₁	H _E	l _p	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT23		TO-236AB				-04-11-04- 06-03-16