




#### Description

The K3010 series consist of two infrared emitting diodes, connected in inverse parallel, optically coupled to a phototransistor detector. They are packaged in a 4-pin DIP package and available in wide-lead spacing and SMD option.

#### Schematic



- 1. Anode, Cathode
- 2. Anode, Cathode
- 3. Emitter
- 4. Collector

#### Features

1. Current transfer ratio

( CTR : Min. 50% at  $I_F$ =± 1mA  $V_{CE}$ =5V )

2. High isolation voltage between input and output

( Viso: 5000Vrms)

- 3.Pb free and RoHS compliant
- 4.MSL class 1
- 5. Agency Approvals
  - UL Approved (No. E169586): UL1577
  - c-UL Approved (No. E169586)
  - VDE Approved (No. 101347): DIN EN60747-5-5
  - FIMKO Approved: EN62368-1, EN60601-1
  - CQC Approved: GB8898-2011, GB4943.1-2011

### Applications

- · System appliances
- Limit Switches
- Sensors
- Programmable controllers applications for Low Input Photocouplers and High Vceo Photocouplers
- Telephone sets
- Telephone exchangers
- Thermostats
- Signal transmission between circuits of different potentials and impedances



# **K3010 Series**


# 4PIN PHOTOTRANSISTOR PHOTOCOUPLER

Unit: mm

#### Outside Dimension

0


1.Dual-in-line type.




3.Long creepage distance type




K30103X




2. Surface mount type.






# 4.Long creepage distance for surface mount type.




K30106X



TOLERANCE: ±0.2mm

## Device Marking



#### Notes:

cosmo 3010 814 YWW

Y: Year code / WW: Week code

: CTR rank



# K3010 Series

# 4PIN PHOTOTRANSISTOR PHOTOCOUPLER

# Absolute Maximum Ratings

(Ta=25°℃)

	Parameter	Symbol	Rating	Unit	
Input	Forward current	I <sub>F</sub>	±50	mA	
	Peak forward current	I <sub>FM</sub>	±1	А	
	Power dissipation	P <sub>D</sub>	70	mW	
Output	Collector-emitter voltage	V <sub>CEO</sub>	80	V	
	Emitter-collector voltage	V <sub>ECO</sub>	6	V	
	Collector current	Ic	50	mA	
	Collector power dissipation	P <sub>C</sub>	150	mW	
Total power dissipation		P <sub>tot</sub>	200	mW	
Isolation voltage 1 minute		V <sub>iso</sub>	5000	Vrms	
Operating temperature		T <sub>opr</sub>	-55 to +115	$^{\circ}\!\mathbb{C}$	
Storage temperature		T <sub>stg</sub>	-55 to +125	$^{\circ}\!\mathbb{C}$	
Soldering temperature 10 seconds		T <sub>sol</sub>	260	$^{\circ}\!\mathbb{C}$	

# Electro-optical Characteristics

(Ta=25°ℂ)


	Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Input	Forward voltage	$V_{F}$	I <sub>F</sub> =±20mA	-	1.2	1.4	V
	Peak forward voltage	$V_{FM}$	I <sub>FM</sub> =±0.5A	-	-	3.0	٧
	Terminal capacitance	Ct	V=0, f=1KHz	-	30	-	pF
Output	Collector dark current	I <sub>CEO</sub>	V <sub>CE</sub> =20V	-	-	0.1	μΑ
Transfer charac- teristics	Current transfer ratio	CTR	I <sub>F</sub> =±1mA, V <sub>CE</sub> =5V	50	-	600	%
	Collector-emitter saturation	V <sub>CE(sat)</sub>	I <sub>F</sub> =±20mA, I <sub>C</sub> =1mA	-	0.1	0.3	V
	Isolation resistance	R <sub>iso</sub>	DC500V	5x10 <sup>10</sup>	10 <sup>11</sup>	-	Ω
	Floating capacitance	C <sub>f</sub>	V=0, f=1MHz	-	0.6	1.0	pF
	Cut-off frequency	f <sub>C</sub>	$V_{CC}$ =5V, $I_C$ =2mA, $R_L$ =100 $\Omega$	_	80	-	KHz
	Response time (Rise)	t <sub>r</sub>	$V_{CE}$ =2V, $I_C$ =2mA, $R_L$ =100 $\Omega$	-	5	20	μs
	Response time (Fall)	t <sub>f</sub>		-	4	20	μs




## Classification table of current transfer ratio is shown below.

K3010 Model No.	CTR (%)
K3010 A	60 ~ 600
K3010 B	60 ~ 300
K3010 C	50 ~ 150

**Fig.2 Collector Power Dissipation** vs. Ambient Temperature



**Fig.4 Forward Current** vs. Ambient Temperature



**Fig.1 Current Transfer Ratio** 






Fig.3 Collector Dark Current vs. Ambient Temperature



Ambient Temperature Ta (°C)

Fig.5 Forward Current

#### vs. Forward Voltage



Forward Voltage V<sub>F</sub> (V)





# Fig.6 Collector Current vs. Collector-Emitter Voltage




Fig.8 Collector-Emitter Saturation Voltage vs. Ambient Temperature

Collector-Emitter Voltage V<sub>CE</sub> (V)




Fig.10 Response Time (Rise) vs. Load Resistance




Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature






Fig.9 Collector-Emitter Saturation Voltage vs. Forward Current



Forward Current I<sub>F</sub> (mA)


Fig.11 Response Time (Fall) vs. Load Resistance



Load Resistance R<sub>L</sub> (KΩ)



# Test Circuit for Response Time

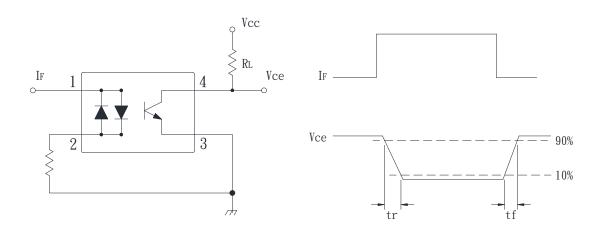



# K3010 Series 4PIN PHOTOTRANSISTOR PHOTOCOUPLER

#### Recommended Soldering Conditions

#### (a) Infrared reflow soldering:

■ Peak reflow soldering : 260°C or below (package surface temperature)

■ Time of peak reflow temperature : 10 sec
 ■ Time of temperature higher than 230°C : 30-60 sec
 ■ Time to preheat temperature from 180~190°C : 60-120 sec


■ Time(s) of reflow: Two

■ Flux: Rosin flux containing small amount of chlorine (The

flux with a maximum chlorine content of 0.2 Wt% is

recommended.)

### Recommended Temperature Profile of Infrared Reflow

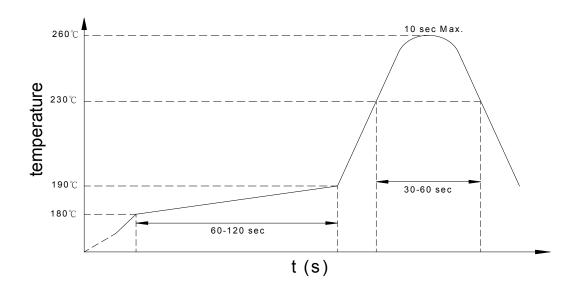

#### (b) Wave soldering:

■ Temperature : 260°C or below (molten solder temperature)

■ Time : 10 seconds or less

■ Preheating conditions : 120°C or below (package surface temperature)

■ Time(s) of reflow : One

■ Flux: Rosin flux containing small amount of chlorine (The flux with a maximum

chlorine content of 0.2 Wt% is recommended.)

(c) Cautions:

■ Fluxes: Avoid removing the residual flux with freon-based and chlorine-based

cleaning solvent.

Avoid shorting between portion of frame and leads.



# Numbering System

# K3010 X Y (Z)

#### Notes:

K3010 = Part No.

X = Lead form option (1, 2, 3, 6)


 $Y = CTR \text{ rank option } (A \sim C)$ 

Z = Tape and reel option (TLD, TRU)


Option	Description	Packing quantity	
2 (TLD)	surface mount type package + TLD tape & reel option	2000 units per reel	
2 (TRU)	surface mount type package + TRU tape & reel option	2000 units per reel	
6 (TLD)	long creepage distance for surface mount type package + TLD tape & reel option	2000 units per reel	
6 (TRU)	long creepage distance for surface mount type package + TRU tape & reel option	2000 units per reel	

# • Recommended Pad Layout for Surface Mount Lead Form

# 1. Surface mount type.




# 2.Long creepage distance for surface mount type.



Unit: mm




## • 4-pin SMD Carrier Tape & Reel

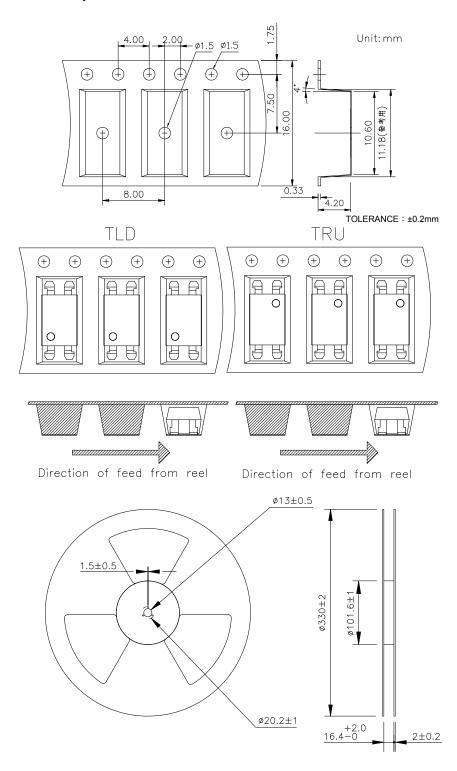



## • 4-pin L Carrier Tape & Reel

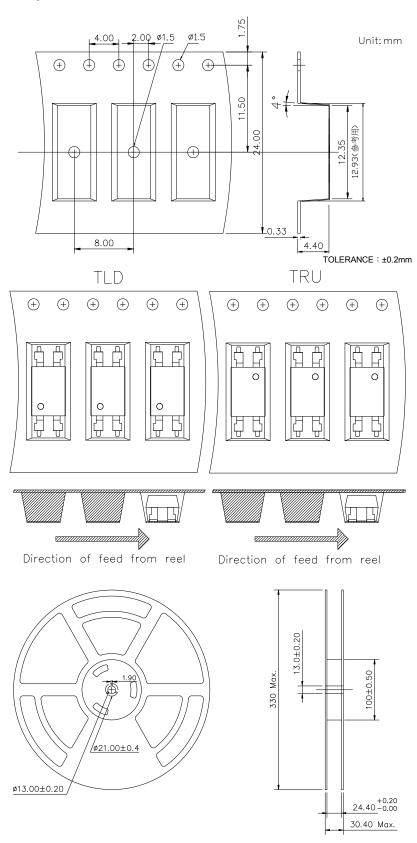



#### Application Notice

The statements regarding the suitability of products for certain types of applications are based on cosmo's knowledge of general applications of cosmo products. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to verify the specifications are suitable for use in a particular application. Customers are solely responsible for all aspects of their own product design or applications. The parameters provided in the datasheet may vary in different applications and performance may vary over time. All operating parameters (including typical parameters) must be validated by customer's technical experts for different applications. cosmo assumes no liability for customer' product design or applications. Product specifications do not expand or otherwise change cosmo's terms and conditions of purchase, including but not limited to the warranty expressed therein.

When using cosmo products, please comply with safety standards and instructions. cosmo has no liability and responsibility to the damage caused by improper use of the instructions specified in the specifications.

cosmo products are designed for use in general electronic equipment such as telecommunications, office automation equipments, personal computers, test and measurement equipments, consumer electronics, industrial control, instrumentation, audio, video.

cosmo devices shall not be used in equipment that requires higher level of reliability and safety, such as nuclear power control equipment, telecommunication equipment(trunk lines), space application, medical and other life supporting equipments, and equipment for aircraft, military, automotive or any other application that can cause human injury or death.

cosmo reserves the right to change the specifications, data, characteristics, structure, materials and other contents at any time without notice. Please contact cosmo to obtain the latest specification.

cosmo disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.