SHUNT STABILIZER TRIODE

Shunt stabilizer triode intended for use as in colour TV receivers.

QUICK REFERENCE DATA					
Anode voltage	V	а		25	kV
Anode current	$I_{\mathcal{E}}$	ì	max.	1.6	mA


HEATING: Indirect by A.C. or D.C.; series supply


 $\begin{array}{cccc} \text{Heater current} & & I_f & & 300 & \text{mA} \\ \text{Heater voltage} & & & V_f & & 7.3 & V \end{array}$

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Magnoval Top cap: Type 2



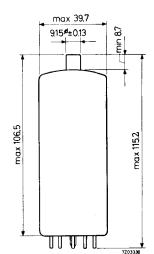

Mounting: Additional supporting of the tube at the top is required.

To prevent corona-effects any metal screening applied around the tube should be at least $5\ \mathrm{cm}$ from the nearest point of the bulb.

Adequate ventilation should be provided for.

TYPICAL CHARACTERISTICS

Anode voltage	٧a	25	KV
Screen voltage	V_s	0	V
Grid voltage change for an anode current change from 0.1 to 1.5 mA	Δ V $_{f g}$	max. 10	V
Grid voltage at $I_a = 1.5 \text{ mA}$	v_{g} .	- 7 to -3 0	V
at $I_a = 0.1 \text{ mA}$	$V_{\mathbf{g}}$	max40	V

LIMITING VALUES (Design centre rating system unless otherwise specified)

Anode voltage	v_a	max.	25	kV
Anode voltage (absolute max.)	v_a	max.	27.5	kV ¹)
Anode current	I_a	max.	1.6	mA
Anode dissipation	w_a	max.	3 0	W
Anode dissipation (absolute max.)	W_a	max.	40	W^{2})
Negative grid voltage	$-v_g$	max.	150	V^{3})
Grid resistor	Rg	max.	5	$M\Omega$
Cathode to heater voltage				
cathode positive	$v_{\mathbf{kf}}$	max. 4	00 V _{DC} +25	0 V _{AC}
cathode negative	$-v_{kf}$	max.	250	V
Screen voltage	v_s	max.	0	V
	$-V_s$	max.	400	V 4)
Anode seal temperature				
(absolute max.)	$t_{\mathbf{S}}$	max.	200	°C

Precaution: x-ray shielding may be required to give protection against excessive radiation.

¹⁾ If due to a circuit failure the anode current becomes 0 mA the anode voltage should never exceed 45 kV (abs. max.)

²⁾ Permissible only during short periods; in total up to a maximum of 10% of the operation time of the tube.


³⁾ During equipment warm-up and for brief interval during receiver adjustment this voltage may rise to 440 V max.

⁴) The screen connected to pin 2 is provided to shield grid and cathode from the high anode voltage.


It is recommended to connect the screen directly to earth, with a minimum lead inductance. $% \left(1\right) =\left(1\right) \left(1\right) +\left(1\right) \left(1\right) \left(1\right) +\left(1\right) \left(1\right) \left($

The modulating influence of possible hum ripple of the screen to cathode voltage should be taken into account; the sensitivity for these variations in Vs/k is $2.5\,\mu\text{A/V}$ max.

3

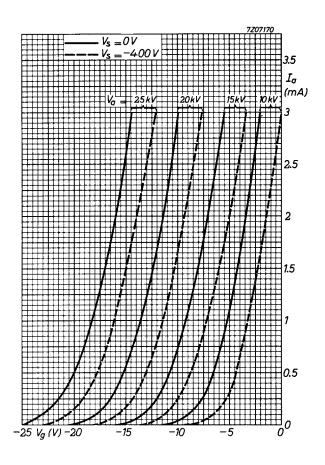

December 1969



PD500

page	sheet	date
1	1	1969.12
2	2	1969.12
3	3	1969.12
4	FP	1999.02.24