- TUNG·SOL -

CATHODE RAY-

THE 21BCP4 IS A DIRECT VIEW PICTURE TUBE DESIGNED FOR TELEVISION APPLI-CATIONS. ITS FEATURES INCLUDE:

> ELECTROSTATIC FOCUS MAGNETIC DEFLECTION UNIPOTENTIAL CATHODE

ALUMINIZED SCREEN GRAY FILTER FACEPLATE EXTERNAL CONDUCTIVE COATING 19 1/8" X 14 3/16" RASTER SIZE

180

180

1.5

VOLTS

VOLTS

MEGOHMS

RECTANGULAR GLASS CONSTRUCTION DOES NOT REQUIRE ION TRAP MAGNET

ELECTRICAL DATA

ELEGINICAL DATA			
FOCUSING METHOS	ELECT	ROSTATIC	
DEFLECTING METHOD		MAGNETIC	
DEFLECTION ANGLE (APPROX.):			
HORIZONTAL	65	DEGREES	
VERTICAL	50	DEGREES	
DIAGONAL	70	DEGREES	
DIRECT INTERELECTRODE CAPACITANCES (APPROX.):			
CATHODE TO ALL OTHER ELECTRODES	5	µµ f	
GRID #1 TO ALL OTHER ELECTRODES	5 6	$\mu\mu$ f	
MAXIMUM EXTERNAL CONDUCTIVE COATING TO ANODE	750	µµ f	
MINIMUM EXTERNAL CONDUCTIVE COATING TO ANODE	500	µµ £	
OPTICAL DATA			
FHOSPHOR NUMBER	SULFIDE TYPE	P-4	
FLUORESCENT COLOR		WHITE	
PHOSPHORESCENT COLOR		WHITE	
FERSISTENCE		SHORT	
FACEPLATE TRANSMISSION AT CENTER (APPROX.):	71	PERCENT	
RATINGS			
INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM			
HEATER VOLTAGE	6.3	VOLTS	
HEATER CURRENT	$0.6 \pm 10\%$	AMP.	
MAXIMUM DC ANODE VOLTAGE	20 000	VOLTS	
MAXIMUM DC GRID #4 VOLTAGE	-500 TO +1000	VOLTS	
MAXIMUM DC GRID #2 VOLTAGE	500	VOLTS	
MAXIMUM GRID #1 VOLTAGE:	700	VOL 13	
DC NEGATIVE-BIAS VALUE	125	VOLTS	
DC POSITIVE-BIAS VALUE FOSITIVE-PEAK VALUE	Ō	VOLTS	
	2	VOLTS	
MAXIMUM DC PEAK HEATER—CATHODE VOLTAGE: A HEATER NEGATIVE WITH RESPECT TO CATHODE			
DURING WARM-UP PERIOD NOT TO EXCEED 15 SECOND	os 410	V01 *0	
AFTER FOULDWENT WAR TO THE TOTAL TO SECOND	75 410	VOLTS	

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

DC ANODE VOLTAGE ^B	16 000	VOLTAS
DC GRID #4 VOLTAGE	+50 to +550	VOLTS
DC GRID #2 VOLTAGE	300	VOLTS
DC GRID #1 VOLTAGE ^A	-28 TO -72	VOLTS
DC GRID #4 CURRENT	−15 to +25	μ AMP

 $^{^{}m A}$ c4thode should be returned to one side or to the midtap of the heater transformer winding.

AFTER EQUIPMENT WARM-UP PERIOD

MAXIMUM GRID #1 CIRCUIT RESISTANCE

HEATER POSITIVE WITH RESPECT TO CATHODE

CONTINUED ON FOLLOWING PAGE

 $^{^{\}rm B}$ Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than 14,000 volts.

CVISUAL EXTINCTION OF FOCUSED RASTER.

21BCP4

12L

- TUNG·SOL


CONTINUED FROM PRECEDING PAGE

MECHANICAL DATA

23 1/32 ± 3/8 OVERALL LENGTH INCHES GREATEST DIMENSIONS OF BULB: 21 7/32 ± 1/8 DIAGONAL INCHES 20 1/4 ± 1/8 WIDTH INCHES HEIGHT 15 9/16 ± 1/8 INCHES MIN. USEFUL SCREEN DIMENSIONS: DIAGONAL 20 1/8 INCHES WIDTH 19 1/8 INCHES HE!GHT 14 3/16 INCHES BULB CONTACT RECESSED SMALL CAVITY CAP J1-21 BASE SMALL SHELL DUODECAL 6 PIN B6-63 BASING


BULB CONTACT ALIGNMENT

J1-21 CONTACT ALIGNS WITH PIN FOSITION #6 ± 30 DEGREES

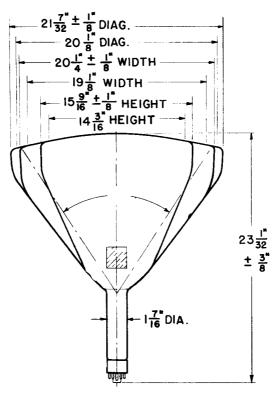

FIN 1 - HEATER PIN 2 - GRID #1 PIN 6 - GRID #4 PIN 10 - GRID #2 PIN 11 - CATHODE

PIN CONNECTIONS



PIN 12 - HEATER ANODE CAP: GRID NO. 3

GRID NO. 5