

engineering data service

6 μμf

Max.

Min.

2500 μμf

2000 μμf

21CQP4

CHARACTERISTICS

GENERAL DATA	
Focusing Method Electrostati	с
Focusing Method Electrostatic Deflection Method	С
Horizontal 10	5 Degrees
Horizontal	n Degrees
Variant 9	7 Degrees
Vertical	/ Degrees
Phosphor Aluminized F	1
Fluorescence	e
Persistence Short to Medium	1
Faceplate Gray Filter Glas	s
Light Transmittance (approx.)	3 Percent
ELECTRICAL DATA	
Heater Voltage 6.	3 Volts
Heater Voltage	6 Ampere
Heater Warm-up Time ¹	ĭ Seconds
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μμ f
Cathode to III Other Electrodes	, hala-

MECHANICAL DATA

Minimum Useful Screen Dimensions
(Maximum Assured) $19\frac{1}{16} \times 15\frac{1}{16}$ Inches
Minimum Useful Screen Area
Bulb Contact (Recessed Small Cavity Cap) J1-21
Bulb
Base
Basing
Weight (approx.) 20 Pounds

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Grid No. 1 to All Other Electrodes


External Conductive Coating to Anode² . . .

Anode Voltage										19	9,800 Volts	dc
Grid No. 4 Voltage												
(Focusing Electrode).								-4	550 1	:o +	1100 Volts	dc
Grid No. 2 Voltage											550 Volts	dc
Grid No. 1 Voltage												
Negative Bias Value .											154 Volts	dc
Negative Peak Value											220 Volts	
Positive Bias Value .											0 Volts	dc
Positive Peak Value .											2 Volts	
Peak Heater-Cathode Volta												
Heater Negative with Respect to Cathode												
During Warm-up F												
15 Seconds .											450 Volts	
After Equipment Wa	rm-	-up	Pe	rio	d		•				200 Volts	
Heater Positive with R	esp	ect	to	Ca	the	ode					200 Volts	

QUICK REFERENCE DATA

Television Picture Tube
21" Direct Viewed
Rectangular Glass Type
Lightweight Tube
Spherical Faceplate
Gray Filter Glass
Aluminized Screen
Electrostatic Focus
110° Magnetic Deflection
1½" Neck Diameter
No Ion Trap
External Conductive Coating





SYLVANIA ELECTRIC PRODUCTS INC.

TELEVISION PICTURE TUBE DIVISION

SENECA FALLS, NEW YORK

Prepared and Released By The TECHNICAL PUBLICATIONS SECTION EMPORIUM, PENNSYLVANIA

> JUNE, 1957 PAGE 1 OF 3

SYLVANIA

21CQP4

PAGE 2

TYPICAL	OPER	ATING	COND	ITIONS
		/ X I II I I I I I		111/11/

Anode Voltage										. 16,000 Volts	do
Grid No. 4 Voltage for Focus										-50 to +350 Volts	do
Grid No. 2 Voltage										300 Volts	do
Grid No. 1 Voltage required for	r (Cut	off	3						-35 to −72 Volts	do

CIRCUIT VALUES

NOTES:

- 1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
- 2. External conductive coating must be grounded.
- 3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

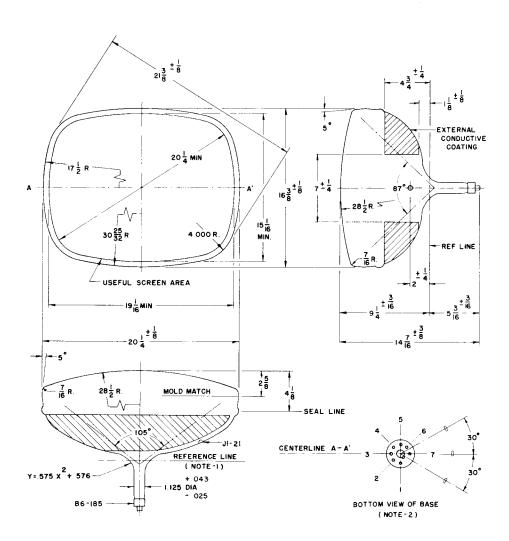


DIAGRAM NOTES:

- 1. Reference line is determined by plane C-C' of JETEC No. 126 Reference Line gauge when the gauge is seated against the bulb.
- 2. Base Pin No. 7 aligns with anode contact (J1-21) within 30°.
- 3. Dimensions are in inches.