


**General.** The A 207 is a high vacuum half-wave rectifier with a thoriated tungsten filament.

Cooling. The valve must have adequate ventilation. With an anode dissipation of 130 watts the anode will run at red heat.

Mounting. The holder of the valve must be sprung to prevent the transmission of sharp knocks to the valve. This is on account of the intrinsic brittleness of carbonised thoriated tungsten filaments. The valve is mounted on a Goliath Edison Screw base.

## APPROXIMATE DATA

$V_f$	4	V
$I_f$	12	Α
PIV (max)	40	kV
Ia (pk) (max)	1.1	Α
Pa (max)	130	W
r <sub>a</sub>	600	$\Omega$

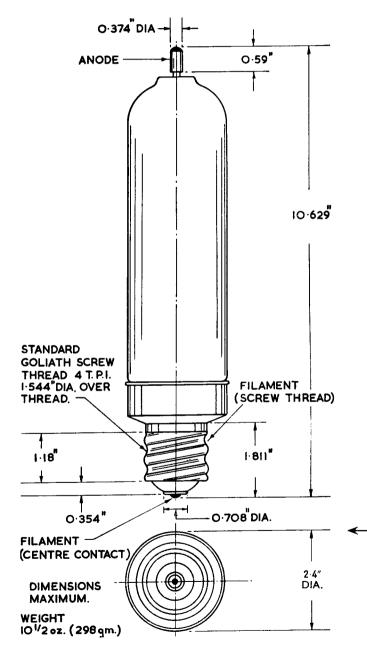

## MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED



PRINTED IN ENGLAND