

## DG1 DISPLAY


## TS820S DISPLAY PROBLEMS

CAUTION !!! HIGH VOLTAGE...

Remove top & bottom radio cover.

Review Service Bulletin #26 & 53. Remove Molex plugs from display & electronic unit.

Some DG1 displays do not have molex connector but are soldered.

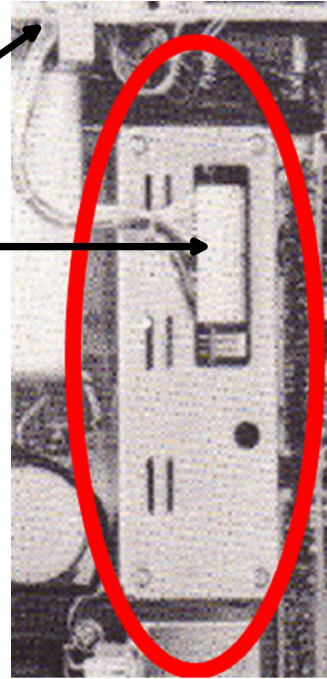

Apply a small amount of DeOxit cleaner to both plug and pins.

Put connectors back on and test.

Problem Resolved?

YES

Reinstall radio covers.

Have Fun

NO

Remove DG1 module and remove cover.

Refer to bulletin #53. Instead of resoldering each pad, put a small wire through each hole and solder on both sides of the board.

YES

Problem Resolved?

NO

CALL FOR HELP