



3.3V CMOS 20-BIT UNIVERSAL BUS DRIVER WITH 3-STATE OUTPUTS

IDT74ALVC162836

FEATURES:

- 0.5 MICRON CMOS Technology
- Typical $t_{sk(0)}$ (Output Skew) < 250ps
- ESD > 2000V per MIL-STD-883, Method 3015;
> 200V using machine model (C = 200pF, R = 0)
- $V_{CC} = 3.3V \pm 0.3V$, Normal Range
- $V_{CC} = 2.7V$ to $3.6V$, Extended Range
- $V_{CC} = 2.5V \pm 0.2V$
- CMOS power levels (0.4μW typ. static)
- Rail-to-Rail output swing for increased noise margin
- Available in SSOP, TSSOP, and TVSOP packages

Drive Features for ALVC162836:

- Light Balanced Output Drivers: $\pm 12mA$
- Minimal switching noise

DESCRIPTION:


This 20-bit universal bus driver is built using advanced dual metal CMOS technology. Data flow from A to Y is controlled by the output-enable ($\overline{OE}$) input. The device operates in the transparent mode when the latch-enable ($\overline{LE}$) input is low. When $\overline{LE}$ is high, the A data is latched if the clock (CLK) input is held at a high or low logic level. If $\overline{LE}$ is high, the A data is stored in the latch/flip-flop on the low-to-high transition of CLK. When $\overline{OE}$ is high, the outputs are in the high-impedance state.

The ALVC162836 has series resistors in the device output structure which will significantly reduce line noise when used with light loads. This driver has been designed to drive $\pm 12mA$ at the designated threshold levels.


APPLICATIONS:

- SDRAM Modules
- PC Motherboards
- Workstations

FUNCTIONAL BLOCK DIAGRAM

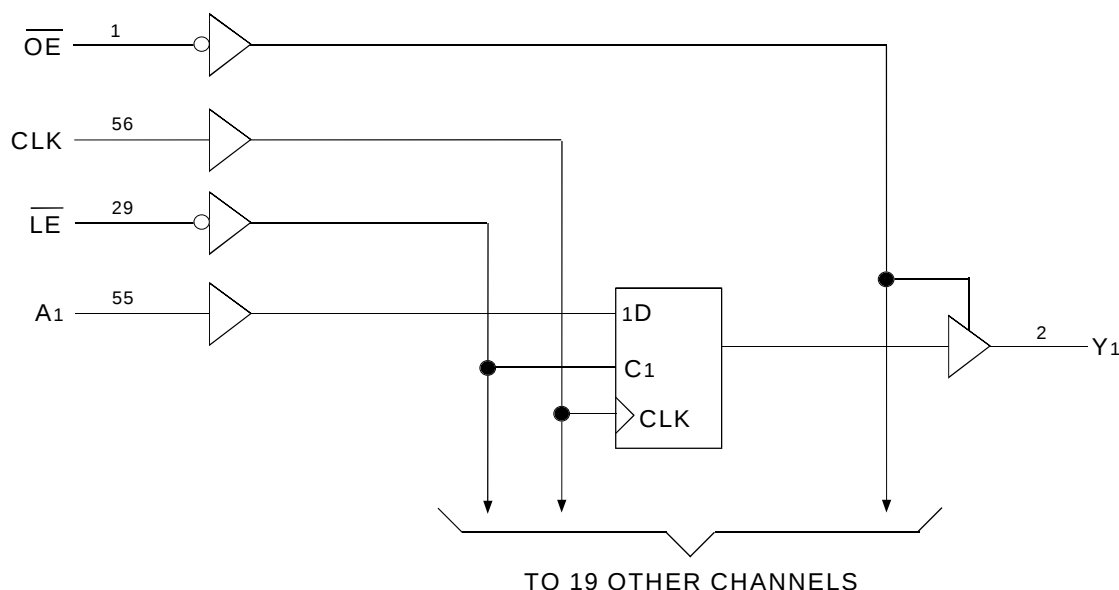

PIN CONFIGURATION

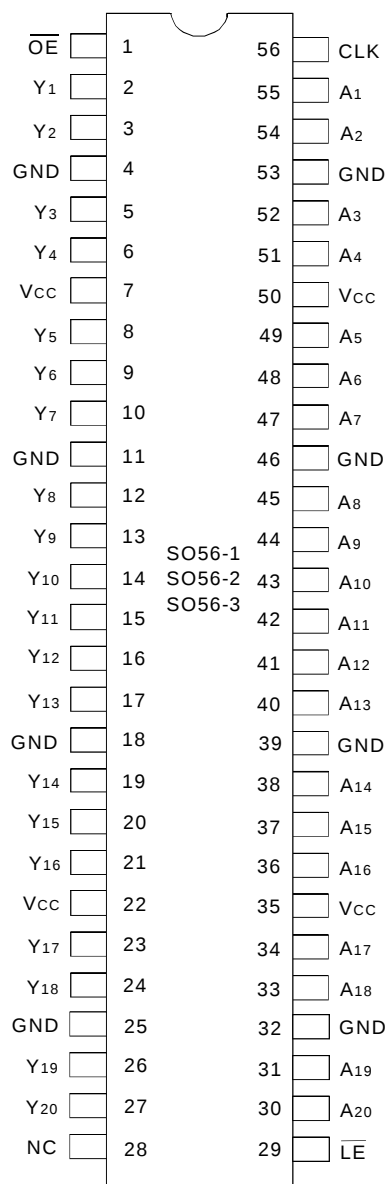

SSOP/ TSSOP/ TVSOP
TOP VIEW

PIN DESCRIPTION

Pin Names	Description
$\overline{OE}$	3-State Output Enable Inputs (Active LOW)
CLK	Register Input Clock
$\overline{LE}$	Latch Enable (Active LOW)
Ax	Data Inputs
Yx	3-State Outputs
NC	No Internal Connection

ABSOLUTE MAXIMUM RATINGS (1)

Symbol	Description	Max.	Unit
$V_{TERM}^{(2)}$	Terminal Voltage with Respect to GND	- 0.5 to + 4.6	V
$V_{TERM}^{(3)}$	Terminal Voltage with Respect to GND	- 0.5 to $V_{CC} + 0.5$	V
TSTG	Storage Temperature	- 65 to + 150	°C
IOUT	DC Output Current	- 50 to + 50	mA
IIK	Continuous Clamp Current, $V_I < 0$ or $V_I > V_{CC}$	± 50	mA
IOK	Continuous Clamp Current, $V_O < 0$	- 50	mA
ICC	Continuous Current through each V_{CC} or GND	±100	mA

NEW16link

NOTES:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- V_{CC} terminals.
- All terminals except V_{CC} .

CAPACITANCE ($T_A = +25^\circ\text{C}$, $f = 1.0\text{MHz}$)

Symbol	Parameter ⁽¹⁾	Conditions	Min.	Typ.	Max.	Unit
C_{IN}	Input Capacitance	$V_{IN} = 0V$	3.3	5	6	pF
C_{OUT}	Output Capacitance	$V_{OUT} = 0V$	—	7	9	pF
$C_{I/O}$	I/O Port Capacitance	$V_{IN} = 0V$	—	7	9	pF

NOTE:

- As applicable to the device type.

FUNCTION TABLE (1)

Inputs				Outputs
$\overline{OE}$	$\overline{LE}$	CLK	Ax	Yx
H	X	X	X	Z
L	L	X	L	L
L	L	X	H	H
L	H	↑	L	L
L	H	↑	H	H
L	H	H	X	Y_0
L	H	L	X	Y_0

NOTE:

- H = HIGH Voltage Level
L = LOW Voltage Level
X = Don't Care
Z = High-Impedance
↑ = LOW-to-HIGH Transition
 Y_0 = Output level before the indicated steady-state input conditions were established.

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Operating Condition: $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

Symbol	Parameter	Test Conditions		Min.	Typ. ⁽¹⁾	Max.	Unit
V_{IH}	Input HIGH Voltage Level	$V_{CC} = 2.3\text{V to } 2.7\text{V}$		1.7	—	—	V
		$V_{CC} = 2.7\text{V to } 3.6\text{V}$		2	—	—	
V_{IL}	Input LOW Voltage Level	$V_{CC} = 2.3\text{V to } 2.7\text{V}$		—	—	0.7	V
		$V_{CC} = 2.7\text{V to } 3.6\text{V}$		—	—	0.8	
I_{IH}	Input HIGH Current	$V_{CC} = 3.6\text{V}$	$V_I = V_{CC}$	—	—	± 5	μA
I_{IL}	Input LOW Current	$V_{CC} = 3.6\text{V}$	$V_I = \text{GND}$	—	—	± 5	
I_{OZH}	High Impedance Output Current (3-State Output pins)	$V_{CC} = 3.6\text{V}$	$V_O = V_{CC}$	—	—	± 10	μA
I_{OZL}			$V_O = \text{GND}$	—	—	± 10	μA
V_{IK}	Clamp Diode Voltage	$V_{CC} = 2.3\text{V}$, $I_{IN} = -18\text{mA}$		—	-0.7	-1.2	V
V_H	Input Hysteresis	$V_{CC} = 3.3\text{V}$		—	100	—	mV
I_{CCL} I_{CCH} I_{CCZ}	Quiescent Power Supply Current	$V_{CC} = 3.6\text{V}$ $V_{IN} = \text{GND or } V_{CC}$		—	0.1	40	μA
ΔI_{CC}	Quiescent Power Supply Current Variation	One input at $V_{CC} - 0.6\text{V}$, other inputs at V_{CC} or GND		—	—	750	μA

NEW16link

NOTE:

- Typical values are at $V_{CC} = 3.3\text{V}$, $+25^{\circ}\text{C}$ ambient.

OUTPUT DRIVE CHARACTERISTICS

Symbol	Parameter	Test Conditions ⁽¹⁾		Min.	Max.	Unit
V_{OH}	Output HIGH Voltage	$V_{CC} = 2.3\text{V to } 3.6\text{V}$	$I_{OH} = -0.1\text{mA}$	$V_{CC} - 0.2$	—	V
			$I_{OH} = -4\text{mA}$	1.9	—	
			$I_{OH} = -6\text{mA}$	1.7	—	
		$V_{CC} = 2.7\text{V}$	$I_{OH} = -4\text{mA}$	2.2	—	
			$I_{OH} = -8\text{mA}$	2	—	
		$V_{CC} = 3.0\text{V}$	$I_{OH} = -6\text{mA}$	2.4	—	
			$I_{OH} = -12\text{mA}$	2	—	
V_{OL}	Output LOW Voltage	$V_{CC} = 2.3\text{V to } 3.6\text{V}$	$I_{OL} = 0.1\text{mA}$	—	0.2	V
			$I_{OL} = 4\text{mA}$	—	0.4	
			$I_{OL} = 6\text{mA}$	—	0.55	
		$V_{CC} = 2.7\text{V}$	$I_{OL} = 4\text{mA}$	—	0.4	
			$I_{OL} = 8\text{mA}$	—	0.6	
		$V_{CC} = 3.0\text{V}$	$I_{OL} = 6\text{mA}$	—	0.55	
			$I_{OL} = 12\text{mA}$	—	0.8	

NEW16link

NOTE:

- V_{IH} and V_{IL} must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate V_{CC} range. $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$.

OPERATING CHARACTERISTICS, $T_A = 25^\circ\text{C}$

Symbol	Parameter	Test Conditions	$V_{CC} = 2.5V \pm 0.2V$	$V_{CC} = 3.3V \pm 0.3V$	Unit
			Typical	Typical	
CPD	Power Dissipation Capacitance Outputs enabled	$C_L = 0\text{pF}$, $f = 10\text{MHz}$	31	36	pF
CPD	Power Dissipation Capacitance Outputs disabled		7	11	pF

SWITCHING CHARACTERISTICS (1)

Symbol	Parameter	$V_{CC} = 2.5V \pm 0.2V$		$V_{CC} = 2.7V$		$V_{CC} = 3.3V \pm 0.3V$		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
f_{MAX}		150	—	150	—	150	—	MHz
t_{PLH} t_{PHL}	Propagation Delay Ax to Yx	1	4.4	—	4.6	1.2	4	ns
t_{PLH} t_{PHL}	Propagation Delay $\overline{LE}$ to Yx	1.1	5.8	—	6.1	1.4	5.1	ns
t_{PLH} t_{PHL}	Propagation Delay CLK to Yx	1	5.2	—	5.5	1.9	4.5	ns
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to Yx	1.1	6.4	—	6.5	1.2	5.5	ns
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to Yx	1	4.7	—	5.2	1.7	5.1	ns
t_w	Pulse Duration, $\overline{LE}$ LOW	3.3	—	3.3	—	3.3	—	ns
t_w	Pulse Duration, CLK HIGH or LOW	3.3	—	3.3	—	3.3	—	ns
t_{SU}	Setup Time, data before CLK $\uparrow$	1.4	—	1.7	—	1.5	—	ns
t_{SU}	Setup Time, data before $\overline{LE}$ $\uparrow$, CLK HIGH	1.2	—	1.6	—	1.3	—	ns
t_{SU}	Setup Time, data before $\overline{LE}$ $\uparrow$, CLK LOW	1.4	—	1.5	—	1.2	—	ns
t_H	Hold Time, data after CLK $\uparrow$	0.7	—	0.7	—	0.7	—	ns
t_H	Hold Time, data after $\overline{LE}$ $\uparrow$, CLK HIGH or LOW	1.1	—	1.1	—	1.1	—	ns
$t_{sk(o)}$	Output Skew ⁽²⁾	—	—	—	—	—	500	ps

NOTES:

- See test circuits and waveforms. $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$.
- Skew between any two outputs of the same package and switching in the same direction.

SWITCHING CHARACTERISTICS FROM 0°C TO 65°C , $C_L = 5\text{pF}$

Symbol	Parameter	$V_{CC} = 3.3V \pm 0.15V$		Unit
		Min.	Max.	
t_{PLH} t_{PHL}	Propagation Delay CLK to Yx	1.9	4.5	ns


TEST CIRCUITS AND WAVEFORMS

TEST CONDITIONS

Symbol	V _{CC} (1)= 3.3V±0.3V	V _{CC} (1)= 2.7V	V _{CC} (2)= 2.5V±0.2V	Unit
V _{LOAD}	6	6	2 x V _{CC}	V
V _{IH}	2.7	2.7	V _{CC}	V
V _T	1.5	1.5	V _{CC} / 2	V
V _{LZ}	300	300	150	mV
V _{HZ}	300	300	150	mV
C _L	50	50	30	pF

NEW16link

TEST CIRCUITS FOR ALL OUTPUTS

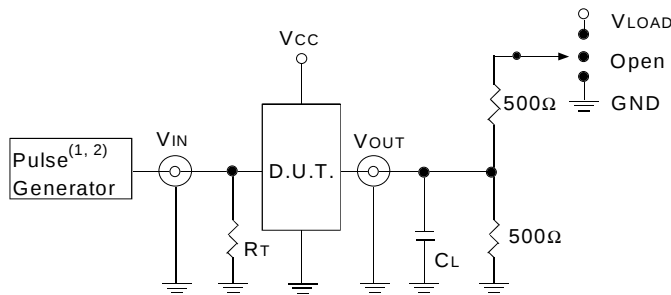

DEFINITIONS:

C_L = Load capacitance: includes jig and probe capacitance.

R_T = Termination resistance: should be equal to Z_{OUT} of the Pulse Generator.

NOTES:


1. Pulse Generator for All Pulses: Rate ≤ 10MHz; t_r ≤ 2.5ns; t_r ≤ 2.5ns.
2. Pulse Generator for All Pulses: Rate ≤ 10MHz; t_r ≤ 2ns; t_r ≤ 2ns.

SWITCH POSITION

Test	Switch
Open Drain Disable Low Enable Low	V _{LOAD}
Disable High Enable High	GND
All Other tests	Open

NEW16link

OUTPUT SKEW - τ_{SK} (x)

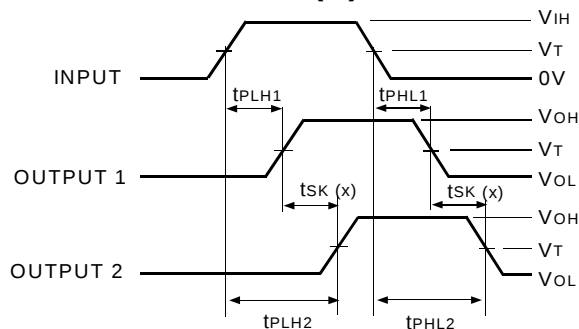


$$\tau_{SK}(x) = |t_{PLH2} - t_{PLH1}| \text{ or } |t_{PHL2} - t_{PHL1}|$$

ALVC Link

NOTES:


1. For τ_{SK}(o) OUTPUT1 and OUTPUT2 are any two outputs.
2. For τ_{SK}(b) OUTPUT1 and OUTPUT2 are in the same bank..

PROPAGATION DELAY

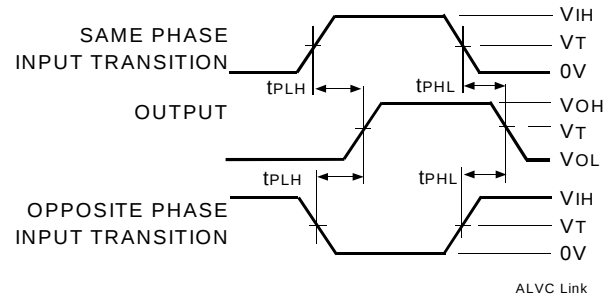

ALVC Link

ENABLE AND DISABLE TIMES

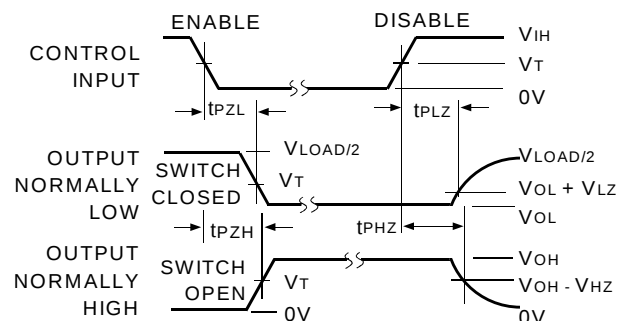


ALVC Link

NOTE:


1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

SET-UP, HOLD, AND RELEASE TIMES

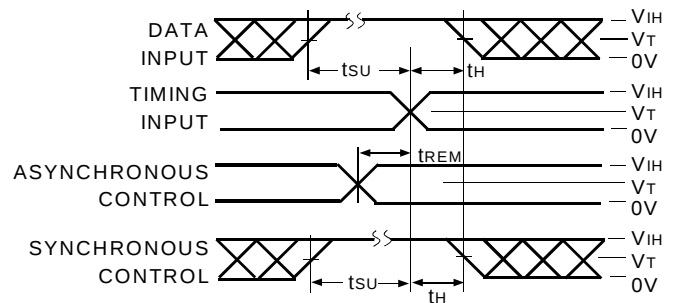

ALVC Link

PULSE WIDTH

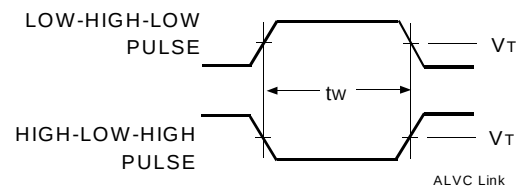

ALVC Link

ORDERING INFORMATION

IDT	XX	ALVC	X	XXX	XXX	XX	
	Temp. Range		Bus-Hold	Family	Device Type	Package	
						PV	Shrink Small Outline Package (SO56-1)
						PA	Thin Shrink Small Outline Package (SO56-2)
						PF	Thin Very Small Outline Package (SO56-3)
					836		20-Bit Universal Bus Driver with 3-State Outputs
					162		Double-Density with Resistors, ±12mA
					Blank		No Bus-Hold
					74		–40°C to +85°C



CORPORATE HEADQUARTERS
 2975 Stender Way
 Santa Clara, CA 95054

for SALES:
 800-345-7015 or 408-727-6116
 fax: 408-492-8674
www.idt.com

for Tech Support:
logichelp@idt.com
 (408) 654-6459