

LP2981

Micropower SOT, 100 mA Ultra Low-Dropout Regulator

General Description

The LP2981 is a 100 mA, fixed-output voltage regulator designed specifically to meet the requirements of battery-powered applications.

Using an optimized VIP™ (Vertically Integrated PNP) process, the LP2981 delivers unequaled performance in all specifications critical to battery-powered designs:

Dropout Voltage. Typically 200 mV @ 100 mA load, and 7 mV @ 1 mA load.

Ground Pin Current. Typically 600 μ A @ 100 mA load, and 80 μ A @ 1 mA load.

Sleep Mode. Less than 1 μ A quiescent current when ON/OFF pin is pulled low.

Smallest Possible Size. SOT-23 package uses an absolute minimum of board space.

Precision Output. 0.75% tolerance output voltages available (A grade).

Eleven voltage options, from 2.5V to 5.0V, are available as standard products.


Features

- Ultra low dropout voltage
- Output voltage accuracy 0.75% (A Grade)
- Guaranteed 100 mA output current
- Smallest possible size (SOT-23 Package)
- < 1 μ A quiescent current when shutdown
- Low ground pin current at all load currents
- High peak current capability (300 mA typical)
- Wide supply voltage range (16V max)
- Fast dynamic response to line and load
- Low Z_{OUT} over wide frequency range
- Overtemperature/overcurrent protection
- -40°C to +125°C junction temperature range

Applications

- Cellular Phone
- Palmtop/Laptop Computer
- Personal Digital Assistant (PDA)
- Camcorder, Personal Stereo, Camera


Block Diagram

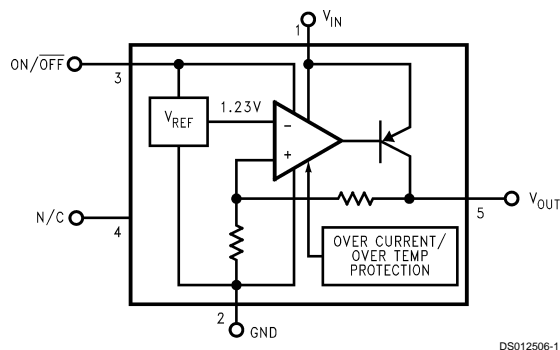

VIP™ is a trademark of National Semiconductor Corporation.

Connection Diagram

5-Lead Small Outline Package (M5)



Top View



Actual Size

For Ordering Information See Table 1
See NS Package Number MA05A

Ordering Information

TABLE 1. Package Marking and Order Information

Output Voltage (V)	Grade	Order Information	Package Marking	Supplied as:
2.5	A	LP2981AIM5X-2.5	L0CA	3k Units on Tape and Reel
2.5	A	LP2981AIM5-2.5	L0CA	250 Units on Tape and Reel
2.5	STD	LP2981IM5X-2.5	L0CB	3k Units on Tape and Reel
2.5	STD	LP2981IM5-2.5	L0CB	250 Units on Tape and Reel
2.7	A	LP2981AIM5X-2.7	L0DA	3k Units on Tape and Reel
2.7	A	LP2981AIM5-2.7	L0DA	250 Units on Tape and Reel
2.7	STD	LP2981IM5X-2.7	L0DB	3k Units on Tape and Reel
2.7	STD	LP2981IM5-2.7	L0DB	250 Units on Tape and Reel
2.8	A	LP2981AIM5X-2.8	L77A	3k Units on Tape and Reel
2.8	A	LP2981AIM5-2.8	L77A	250 Units on Tape and Reel
2.8	STD	LP2981IM5X-2.8	L77B	3k Units on Tape and Reel
2.8	STD	LP2981IM5-2.8	L77B	250 Units on Tape and Reel
2.9	A	LP2981AIM5X-2.9	L0VA	3k Units on Tape and Reel
2.9	A	LP2981AIM5-2.9	L0VA	250 Units on Tape and Reel
2.9	STD	LP2981IM5X-2.9	L0VB	3k Units on Tape and Reel
2.9	STD	LP2981IM5-2.9	L0VB	250 Units on Tape and Reel
3.0	A	LP2981AIM5X-3.0	L05A	3k Units on Tape and Reel
3.0	A	LP2981AIM5-3.0	L05A	250 Units on Tape and Reel
3.0	STD	LP2981IM5X-3.0	L05B	3k Units on Tape and Reel
3.0	STD	LP2981IM5-3.0	L05B	250 Units on Tape and Reel
3.1	A	LP2981AIM5X-3.1	L38A	3k Units on Tape and Reel
3.1	A	LP2981AIM5-3.1	L38A	250 Units on Tape and Reel
3.1	STD	LP2981IM5X-3.1	L38B	3k Units on Tape and Reel
3.1	STD	LP2981IM5-3.1	L38B	250 Units on Tape and Reel
3.2	A	LP2981AIM5X-3.2	L35A	3k Units on Tape and Reel
3.2	A	LP2981AIM5-3.2	L35A	250 Units on Tape and Reel
3.2	STD	LP2981IM5X-3.2	L35B	3k Units on Tape and Reel
3.2	STD	LP2981IM5-3.2	L35B	250 Units on Tape and Reel
3.3	A	LP2981AIM5X-3.3	L04A	3k Units on Tape and Reel
3.3	A	LP2981AIM5-3.3	L04A	250 Units on Tape and Reel
3.3	STD	LP2981IM5X-3.3	L04B	3k Units on Tape and Reel
3.3	STD	LP2981IM5-3.3	L04B	250 Units on Tape and Reel

Ordering Information (Continued)

TABLE 1. Package Marking and Order Information (Continued)

Output Voltage (V)	Grade	Order Information	Package Marking	Supplied as:
3.6	A	LP2981AIM5X-3.6	L0JA	3k Units on Tape and Reel
3.6	A	LP2981AIM5-3.6	L0JA	250 Units on Tape and Reel
3.6	STD	LP2981IM5X-3.6	L0JB	3k Units on Tape and Reel
3.6	STD	LP2981IM5-3.6	L0JB	250 Units on Tape and Reel
3.8	A	LP2981AIM5X-3.8	L36A	3k Units on Tape and Reel
3.8	A	LP2981AIM5-3.8	L36A	250 Units on Tape and Reel
3.8	STD	LP2981IM5X-3.8	L36B	3k Units on Tape and Reel
3.8	STD	LP2981IM5-3.8	L36B	250 Units on Tape and Reel
4.0	A	LP2981AIM5X-4.0	L0ZA	3k Units on Tape and Reel
4.0	A	LP2981AIM5-4.0	L0ZA	250 Units on Tape and Reel
4.0	STD	LP2981IM5X-4.0	L0ZB	3k Units on Tape and Reel
4.0	STD	LP2981IM5-4.0	L0ZB	250 Units on Tape and Reel
4.7	A	LP2981AIM5X-4.7	L0GA	3k Units on Tape and Reel
4.7	A	LP2981AIM5-4.7	L0GA	250 Units on Tape and Reel
4.7	STD	LP2981IM5X-4.7	L0GB	3k Units on Tape and Reel
4.7	STD	LP2981IM5-4.7	L0GB	250 Units on Tape and Reel
5.0	A	LP2981AIM5X-5.0	L03A	3k Units on Tape and Reel
5.0	A	LP2981AIM5-5.0	L03A	250 Units on Tape and Reel
5.0	STD	LP2981IM5X-5.0	L03B	3k Units on Tape and Reel
5.0	STD	LP2981IM5-5.0	L03B	250 Units on Tape and Reel

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature Range	–65°C to +150°C
Operating Junction Temperature Range	–40°C to +125°C
Lead Temperature (Soldering, 5 sec.)	260°C
ESD Rating (Note 2)	2 kV

Power Dissipation (Note 3)

Input Supply Voltage (Survival)	–0.3V to +16V
Input Supply Voltage (Operating)	2.1V to +16V
Shutdown Input Voltage (Survival)	–0.3V to +16V
Output Voltage (Survival, (Note 4))	–0.3V to +9V
I _{OUT} (Survival)	Short Circuit Protected
Input-Output Voltage (Survival, (Note 5))	–0.3V to +16V

Internally Limited

Electrical Characteristics

Limits in standard typeface are for T_J = 25°C, and limits in **boldface type** apply over the full operating temperature range. Unless otherwise specified: V_{IN} = V_{O(NOM)} + 1V, C_{IN} = 1 µF, I_L = 1 mA, C_{OUT} = 4.7 µF, V_{ON/OFF} = 2V.

Symbol	Parameter	Conditions	Typ	LP2981AI-XX (Note 6)		LP2981I-XX (Note 6)		Units
				Min	Max	Min	Max	
ΔV _O	Output Voltage Tolerance	I _L = 1 mA		–0.75	0.75	–1.25	1.25	%V _{NOM}
		1 mA < I _L < 100 mA		–1.0	1.0	–2.0	2.0	
				–2.5	2.5	–3.5	3.5	
$\frac{\Delta V_O}{\Delta V_{IN}}$	Output Voltage Line Regulation	V _{O(NOM)} + 1V ≤ V _{IN} ≤ 16V	0.007		0.014		0.014	%/V
V _{IN} –V _O	Dropout Voltage (Note 7)	I _L = 0	1		3		3	mV
					5		5	
		I _L = 1 mA	7		10		10	
					15		15	
		I _L = 25 mA	70		100		100	
I _{GND}	Ground Pin Current				150		150	µA
		I _L = 100 mA	200		250		250	
					375		375	
		I _L = 0	65		95		95	
					125		125	
		I _L = 1 mA	80		110		110	
					170		170	
V _{ON/OFF}	ON/OFF Input Voltage (Note 8)	I _L = 25 mA	200		300		300	V
					550		550	
		I _L = 100 mA	600		800		800	
					1500		1500	
		V _{ON/OFF} < 0.3V	0.01		0.8		0.8	
I _{ON/OFF}	ON/OFF Input Current	V _{ON/OFF} < 0.15V	0.05		2		2	µA
I _{O(PK)}	Peak Output Current	High = O/P ON	1.4	1.6		1.6		mA
		Low = O/P OFF	0.50		0.15		0.15	
e _n	Output Noise Voltage (RMS)	V _{ON/OFF} = 0	0.01		–1		–1	µV
		V _{ON/OFF} = 5V	5		15		15	
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Ripple Rejection	V _{OUT} ≥ V _{O(NOM)} – 5%	400	150		150		dB
		BW = 300 Hz–50 kHz, C _{OUT} = 10 µF	160					
I _{O(MAX)}	Short Circuit Current	f = 1 kHz	63					mA
		C _{OUT} = 10 µF						
I _{O(MAX)}	Short Circuit Current	R _L = 0 (Steady State)	150					mA
		(Note 9)						

Electrical Characteristics (Continued)

Note 1: Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its rated operating conditions.

Note 2: The ESD rating of pins 3 and 4 is 1 kV.

Note 3: The maximum allowable power dissipation is a function of the maximum junction temperature, $T_{J(MAX)}$, the junction-to-ambient thermal resistance, θ_{JA} , and the ambient temperature, T_A . The maximum allowable power dissipation at any ambient temperature is calculated using:

$$P (MAX) = \frac{T_{J(MAX)} - T_A}{\theta_{JA}}$$

The value of θ_{JA} for the SOT-23 package is 220°C/W. Exceeding the maximum allowable power dissipation will cause excessive die temperature, and the regulator will go into thermal shutdown.

Note 4: If used in a dual-supply system where the regulator load is returned to a negative supply, the LP2981 output must be diode-clamped to ground.

Note 5: The output PNP structure contains a diode between the V_{IN} and V_{OUT} terminals that is normally reverse-biased. Reversing the polarity from V_{IN} to V_{OUT} will turn on this diode (see Application Hints).


Note 6: Limits are 100% production tested at 25°C. Limits over the operating temperature range are guaranteed through correlation using Statistical Quality Control (SQC) methods. The limits are used to calculate National's Averaging Outgoing Level (AOQL).

Note 7: Dropout voltage is defined as the input to output differential at which the output voltage drops 100 mV below the value measured with a 1V differential.

Note 8: The ON/OFF inputs must be properly driven to prevent misoperation. For details, refer to Application Hints.

Note 9: See Typical Performance Characteristics curves.

Basic Application Circuit

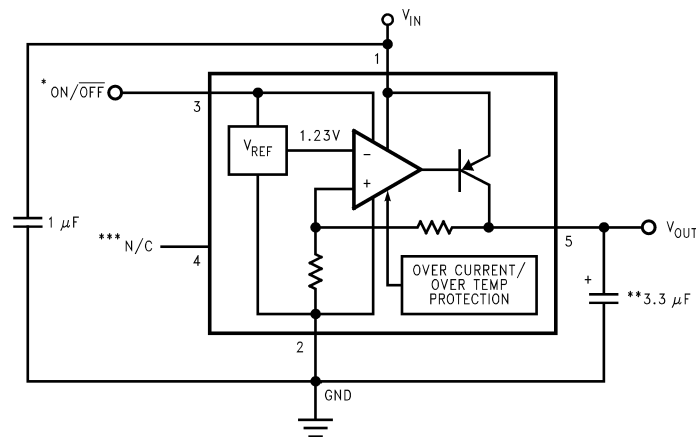

DS012506-4


*ON/OFF input must be actively terminated. Tie to V_{IN} if this function is not to be used.

**Minimum Output Capacitance is shown to insure stability over full load current range. More capacitance provides superior dynamic performance and additional stability margin (see Application Hints).


***Do not make connections to this pin.

Typical Performance Characteristics Unless otherwise specified: $T_A = 25^\circ\text{C}$, $V_{IN} = V_{O(NOM)} + 1\text{V}$, $C_{OUT} = 4.7\ \mu\text{F}$, $C_{IN} = 1\ \mu\text{F}$ all voltage options, ON/OFF pin tied to V_{IN} .


Output Voltage vs Temperature

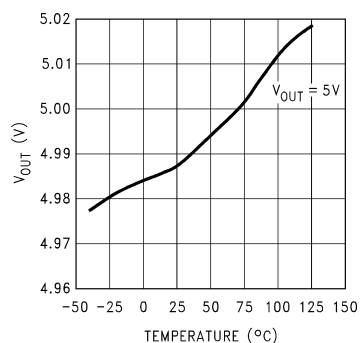


Output Voltage vs Temperature

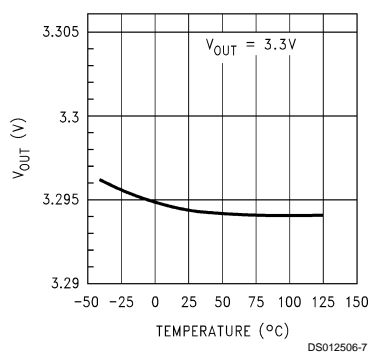


Output Voltage vs Temperature

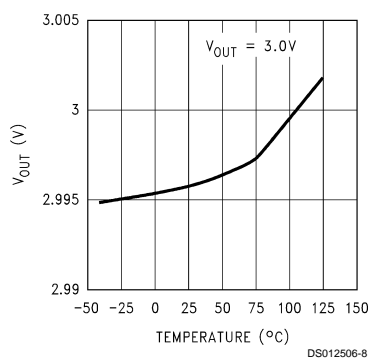


Dropout Characteristics

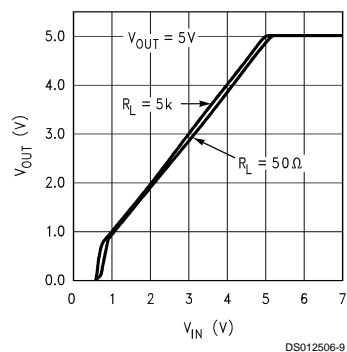

Dropout Characteristics

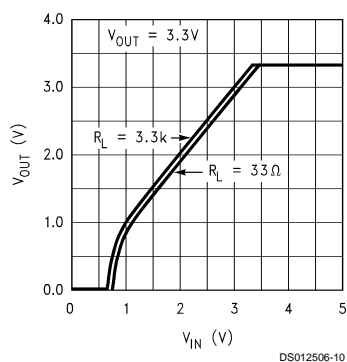


Dropout Characteristics

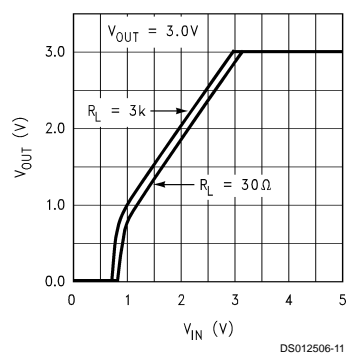


Typical Performance Characteristics Unless otherwise specified: $T_A = 25^\circ\text{C}$, $V_{IN} = V_{O(NOM)} + 1\text{V}$, $C_{OUT} = 4.7\ \mu\text{F}$, $C_{IN} = 1\ \mu\text{F}$ all voltage options, ON/OFF pin tied to V_{IN} . (Continued)


Dropout Voltage vs Temperature

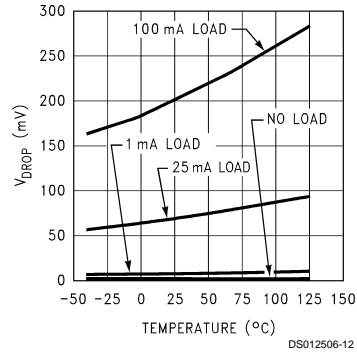


Dropout Voltage vs Load Current

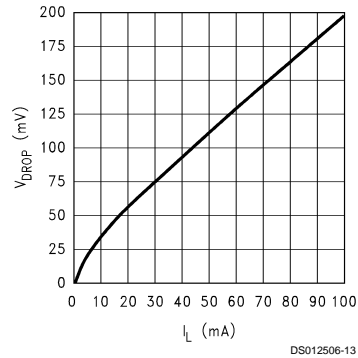


Ground Pin Current vs Temperature

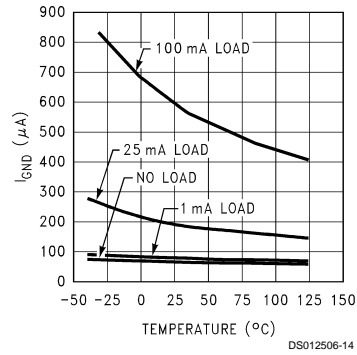


Ground Pin Current vs Load Current

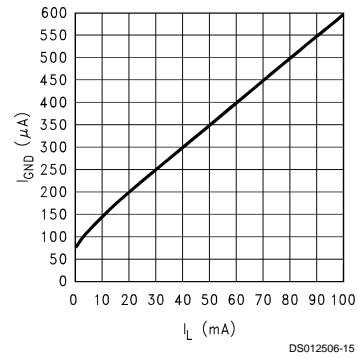

Input Current vs V_{IN}

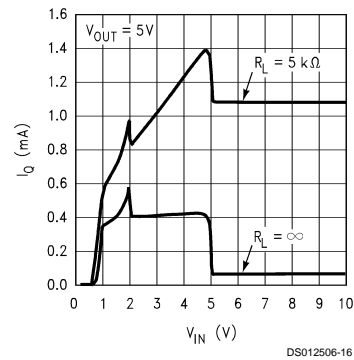


Input Current vs V_{IN}

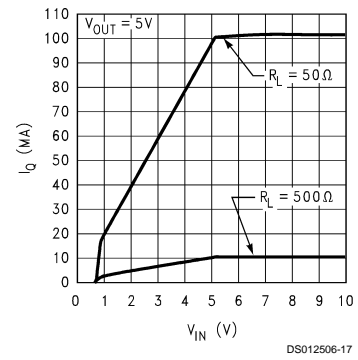


Typical Performance Characteristics Unless otherwise specified: $T_A = 25^\circ\text{C}$, $V_{IN} = V_{O(NOM)} + 1\text{V}$, $C_{OUT} = 4.7\text{ }\mu\text{F}$, $C_{IN} = 1\text{ }\mu\text{F}$ all voltage options, ON/OFF pin tied to V_{IN} . (Continued)


Line Transient Response

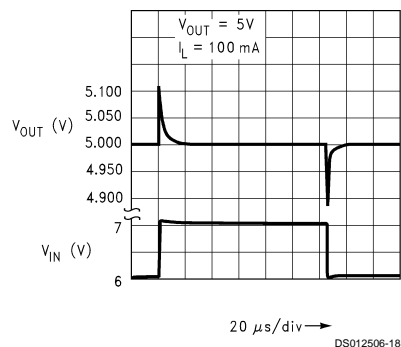


Line Transient Response

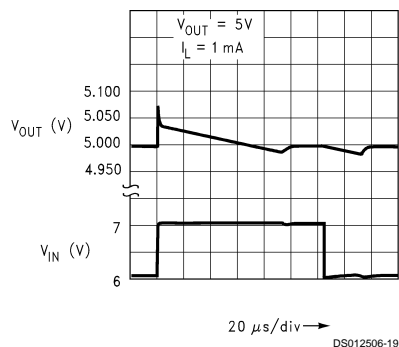


Load Transient Response

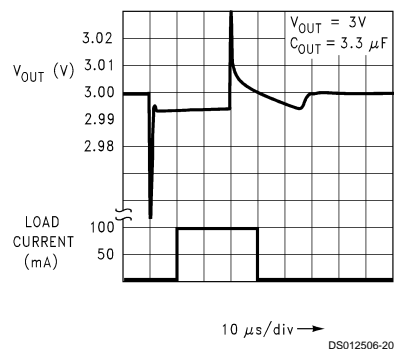


Load Transient Response

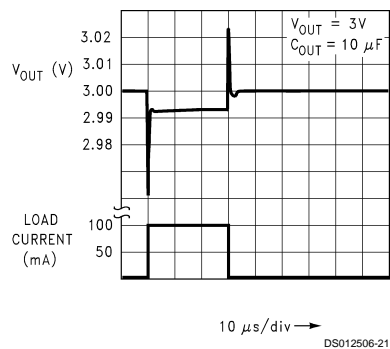

Load Transient Response

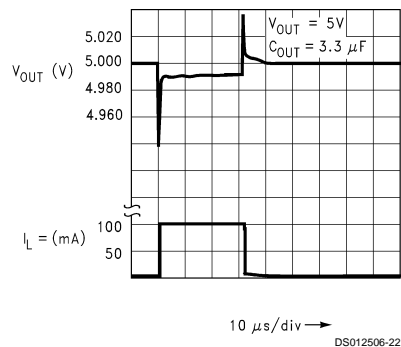


Load Transient Response

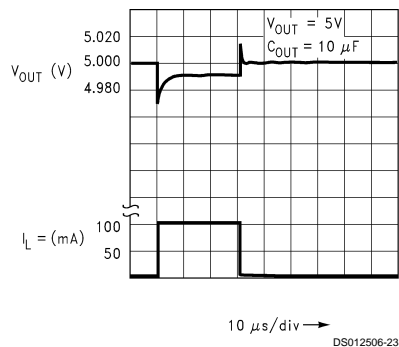


Typical Performance Characteristics Unless otherwise specified: $T_A = 25^\circ\text{C}$, $V_{IN} = V_{O(NOM)} + 1\text{V}$, $C_{OUT} = 4.7\ \mu\text{F}$, $C_{IN} = 1\ \mu\text{F}$ all voltage options, ON/OFF pin tied to V_{IN} . (Continued)


Short Circuit Current




Instantaneous Short Circuit Current vs Temperature

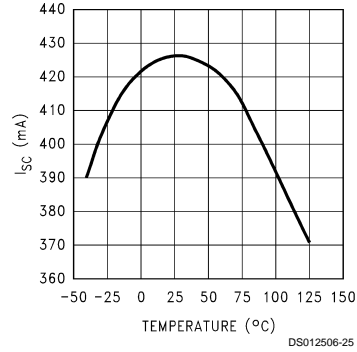


Short Circuit Current




Instantaneous Short Circuit Current vs Output Voltage

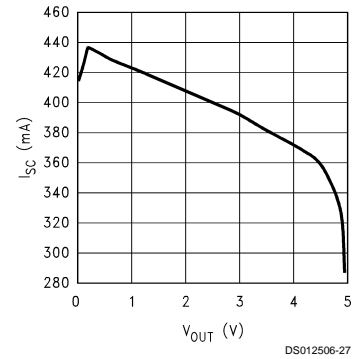

Output Impedance vs Frequency

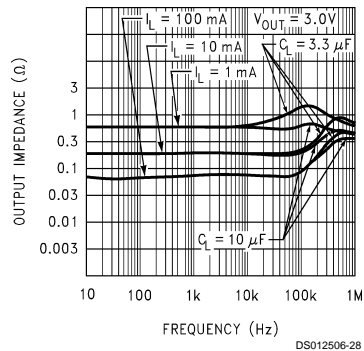


Ripple Rejection

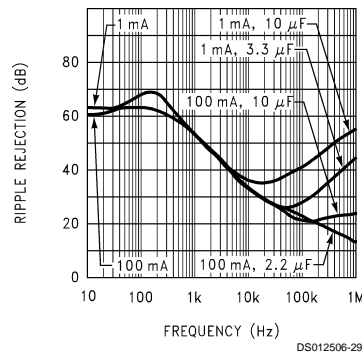


Typical Performance Characteristics Unless otherwise specified: $T_A = 25^\circ\text{C}$, $V_{IN} = V_{O(NOM)} + 1\text{V}$, $C_{OUT} = 4.7\text{ }\mu\text{F}$, $C_{IN} = 1\text{ }\mu\text{F}$ all voltage options, ON/OFF pin tied to V_{IN} . (Continued)


Output Noise Density

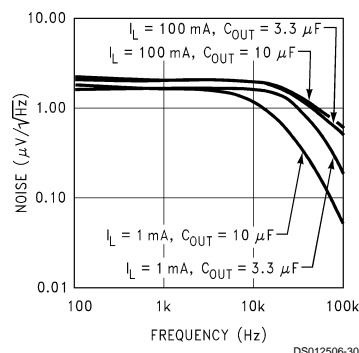


Output Impedance vs Frequency

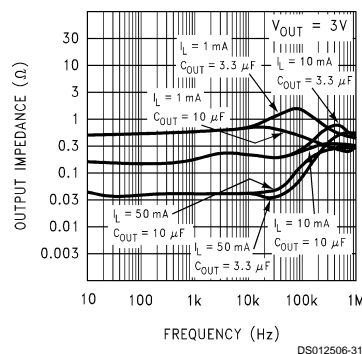


Input to Output Leakage vs Temperature

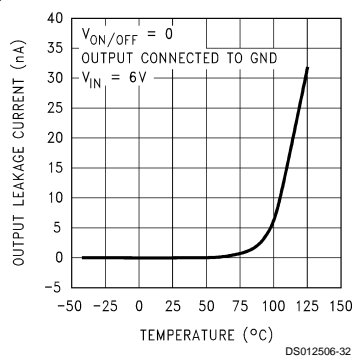


Output Reverse Leakage vs Temperature

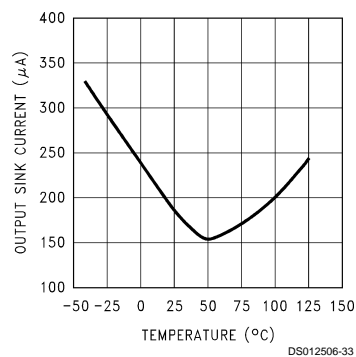

Turn-On Waveform

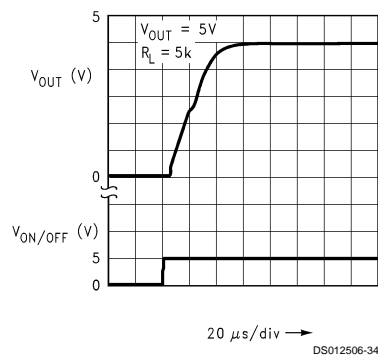


Turn-Off Waveform

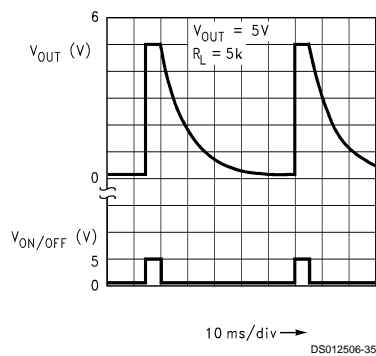


Typical Performance Characteristics Unless otherwise specified: $T_A = 25^\circ\text{C}$, $V_{IN} = V_{O(NOM)} + 1\text{V}$, $C_{OUT} = 4.7\ \mu\text{F}$, $C_{IN} = 1\ \mu\text{F}$ all voltage options, ON/OFF pin tied to V_{IN} . (Continued)

ON/OFF Pin Current vs $V_{ON/OFF}$

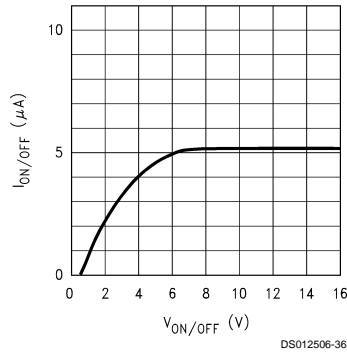

ON/OFF Threshold vs Temperature

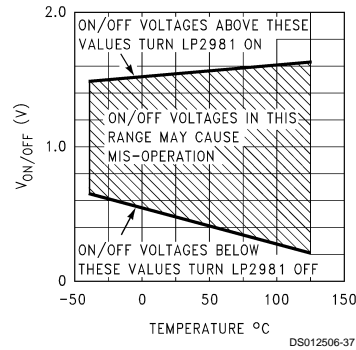

Application Hints

EXTERNAL CAPACITORS

Like any low-dropout regulator, the external capacitors used with the LP2981 must be carefully selected to assure regulator loop stability.

INPUT CAPACITOR: An input capacitor whose value is $\geq 1\ \mu\text{F}$ is required with the LP2981 (amount of capacitance can be increased without limit).

This capacitor must be located a distance of not more than 0.5" from the input pin of the LP2981 and returned to a clean analog ground. Any good quality ceramic or tantalum can be used for this capacitor.

OUTPUT CAPACITOR: The output capacitor must meet both the requirement for minimum amount of capacitance and E.S.R. (equivalent series resistance) value. Curves are provided which show the allowable ESR range as a function of load current for various output voltages and capacitor values (refer to Figures 1, 2, 3, 4).

IMPORTANT: The output capacitor must maintain its ESR in the stable region over the full operating temperature range to assure stability. Also, capacitor tolerance and variation with temperature must be considered to assure the minimum amount of capacitance is provided at all times.

This capacitor should be located not more than 0.5" from the output pin of the LP2981 and returned to a clean analog ground.

CAPACITOR CHARACTERISTICS

TANTALUM: Tantalum capacitors are the best choice for use with the LP2981. Most good quality tantalums can be used with the LP2981, but check the manufacturer's data sheet to be sure the ESR is in range.

It is important to remember that ESR increases at lower temperatures and a capacitor that is near the upper limit for stability at room temperature can cause instability when it gets cold.

In applications which must operate at very low temperatures, it may be necessary to parallel the output tantalum capacitor with a ceramic capacitor to prevent the ESR from going up too high (see next section for important information on ceramic capacitors).

CERAMIC: Ceramic capacitors are not recommended for use at the output of the LP2981. This is because the ESR of a ceramic can be low enough to go below the minimum stable value for the LP2981. A $2.2\ \mu\text{F}$ ceramic was measured and found to have an ESR of about $15\ \text{m}\Omega$, which is low enough to cause oscillations.

If a ceramic capacitor is used on the output, a $1\ \Omega$ resistor should be placed in series with the capacitor.

ALUMINUM: Because of large physical size, aluminum electrolytics are not typically used with the LP2981. They must meet the same ESR requirements over the operating temperature range, more difficult because of their steep increase at cold temperature.

An aluminum electrolytic can exhibit an ESR increase of as much as 50X when going from 20°C to -40°C . Also, some aluminum electrolytics are not operational below -25°C because the electrolyte can freeze.

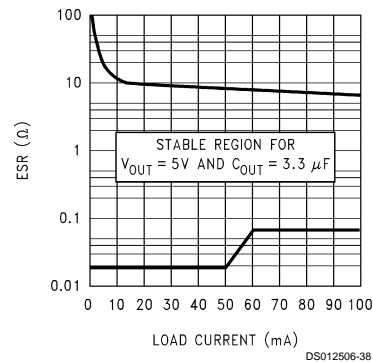


FIGURE 1. 5V/3.3 μF ESR Curves

Application Hints (Continued)

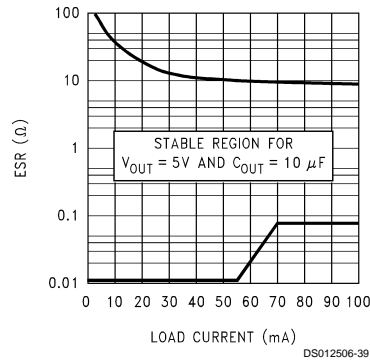


FIGURE 2. 5V/10 μ F ESR Curves

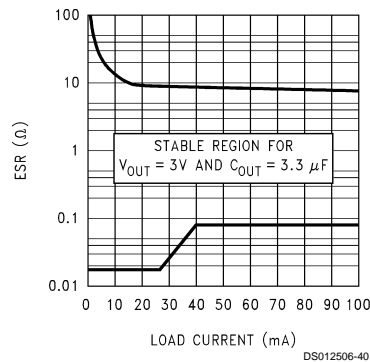


FIGURE 3. 3V/3.3 μ F ESR Curves


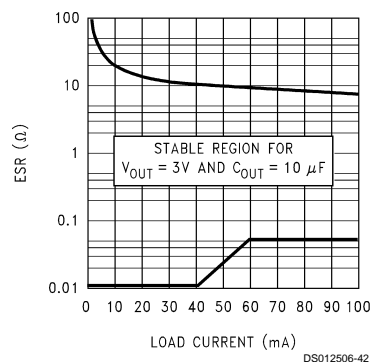


FIGURE 4. 3V/10 μ F ESR Curves

REVERSE CURRENT PATH

The power transistor used in the LP2981 has an inherent diode connected between the regulator input and output (see below).




If the output is forced above the input by more than a V_{BE} , this diode will become forward biased and current will flow from the V_{OUT} terminal to V_{IN} .

This current must be limited to < 100 mA to prevent damage to the part.

The internal diode can also be turned on by abruptly stepping the input voltage to a value below the output voltage.

To prevent regulator mis-operation, a Schottky diode should be used in any application where input/output voltage conditions can cause the internal diode to be turned on (see below).

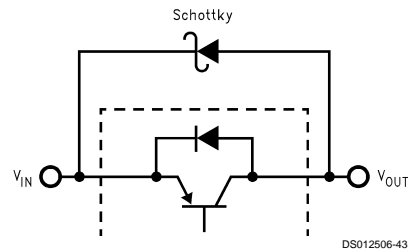

As shown, the Schottky diode is connected in parallel with the internal parasitic diode and prevents it from being turned on by limiting the voltage drop across it to about 0.3V.

ON/OFF INPUT OPERATION

The LP2981 is shut off by pulling the ON/OFF input low, and turned on by driving the input high. If this feature is not to be used, the ON/OFF input should be tied to V_{IN} to keep the regulator on at all times (the ON/OFF input must **not** be left floating).

To ensure proper operation, the signal source used to drive the ON/OFF input must be able to swing above and below the specified turn-on/turn-off voltage thresholds which guarantee an ON or OFF state (see Electrical Characteristics).



The ON/OFF signal may come from either a totem-pole output, or an open-collector output with pull-up resistor to the LP2981 input voltage or another logic supply. The high-level voltage may exceed the LP2981 input voltage, but must remain within the Absolute Maximum Ratings for the ON/OFF pin.

It is also important that the turn-on/turn-off voltage signals applied to the ON/OFF input have a slew rate which is greater than 40 mV/ μ s.



Important: the regulator shutdown function will operate incorrectly if a slow-moving signal is applied to the ON/OFF input.

Physical Dimensions

inches (millimeters) unless otherwise noted

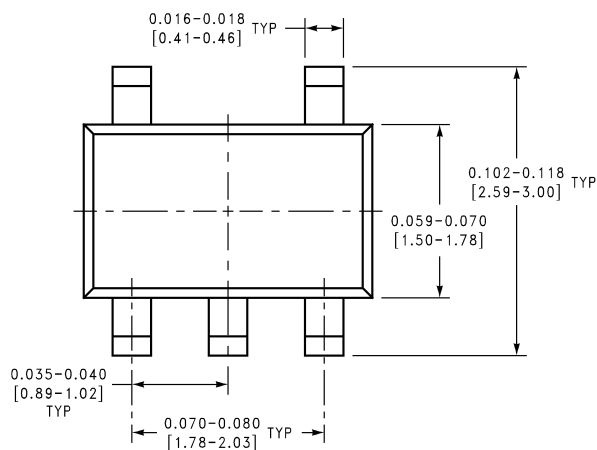

LAND PATTERN RECOMMENDATION

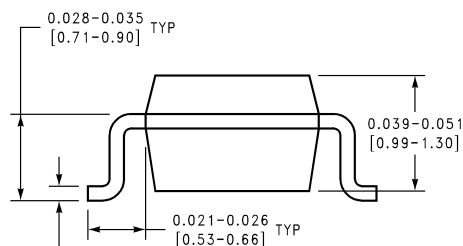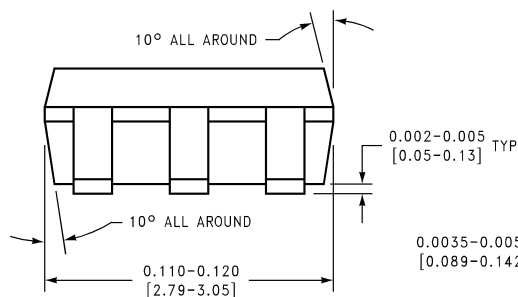

MA05A (REV D)

5-Lead Small Outline Package (M5) NS Package Number MA05A

For Order Numbers, refer to Table 1 in the "Ordering Information" section of this document.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com

www.national.com

National Semiconductor Europe
Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 1 80-530 85 85
English Tel: +49 (0) 1 80-532 78 32
Français Tel: +49 (0) 1 80-532 93 58
Italiano Tel: +49 (0) 1 80-534 16 80

National Semiconductor Asia Pacific Customer Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: sea.support@nsc.com

National Semiconductor Japan Ltd.
Tel: 81-3-5639-7560
Fax: 81-3-5639-7507