

MA142WA

Silicon epitaxial planer type

For switching circuits

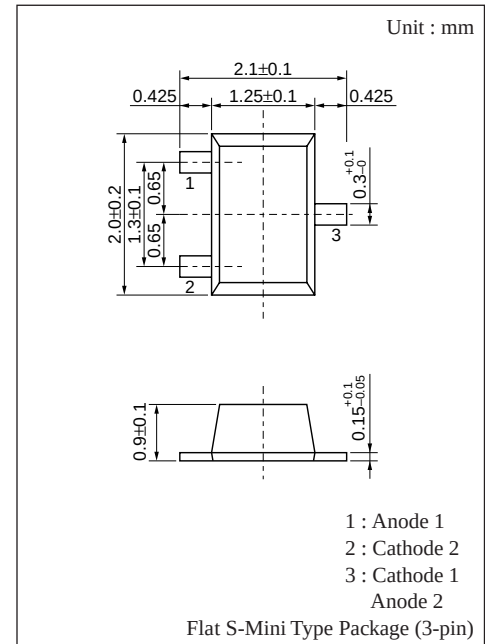
■ Features

- Small S-Mini type package with two incorporated elements, enabling high-density mounting

■ Absolute Maximum Ratings (Ta= 25°C)


Parameter	Symbol	Rating	Unit
Reverse voltage (DC)	V_R	80	V
Peak reverse voltage	V_{RM}	80	V
Forward current (DC)	Single	100	mA
	Double	150	
Peak forward current	Single	225	mA
	Double	340	
Non-repetitive peak forward surge current	Single	500	mA
	Double	750	
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	- 55 to +150	°C

* $t=1s$



Marking Symbol : MO

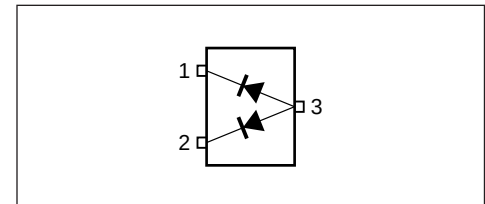■ Internal Connection










■ Electrical Characteristics (Ta= 25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Reverse current (DC)	I_R	$V_R = 75V$			100	nA
Forward voltage (DC)	V_F	$I_F = 100mA$			1.2	V
Reverse voltage (DC)	V_R	$I_R = 100\mu A$	80			V
Terminal capacitance	C_t	$V_R = 0V, f = 1MHz$			15	pF
Reverse recovery time	t_{rr}^*	$I_F = 10mA, V_R = 6V$ $I_{rr} = 0.1 \cdot I_R, R_L = 100\Omega$			10	ns

Note 1 : Rated input/output frequency : 100MHz
2 : * t_{rr} measuring circuit

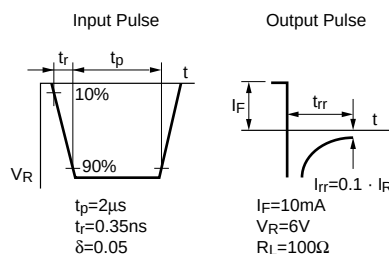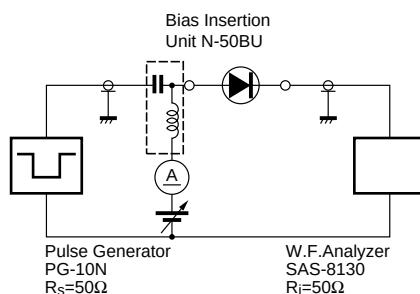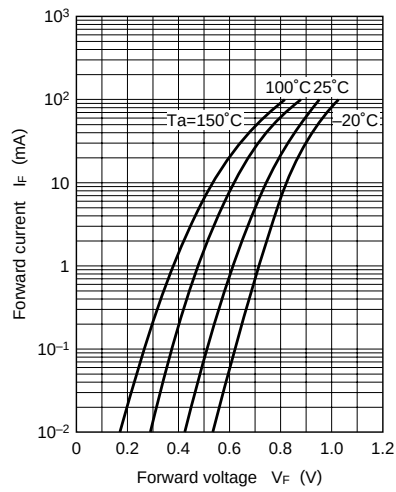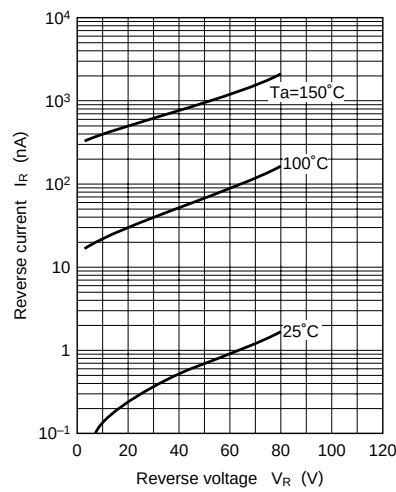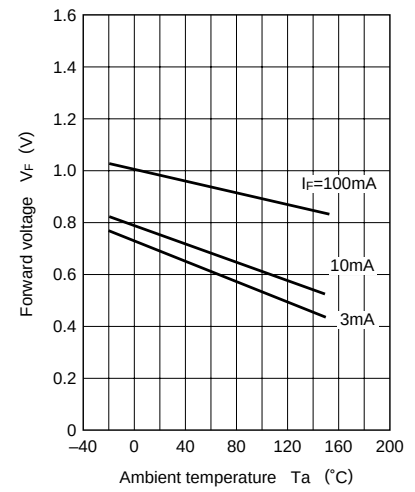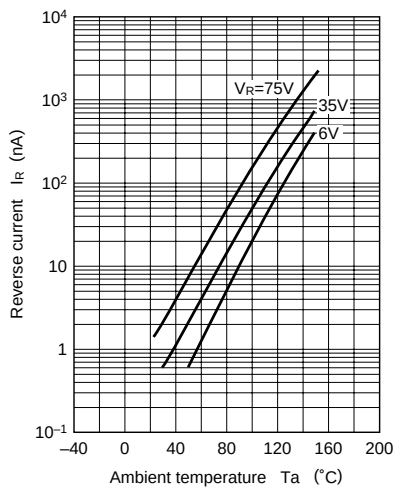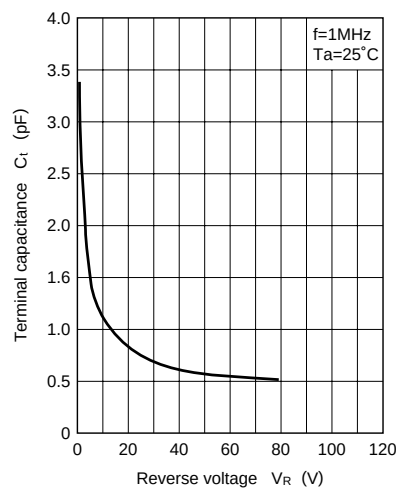■ Marking



$I_F - V_F$  $I_R - V_R$  $V_F - T_a$  $I_R - T_a$  $C_t - V_R$  $I_F(\text{surge}) - t_w$ 