

MA154WA

Silicon epitaxial planer type

For switching circuits

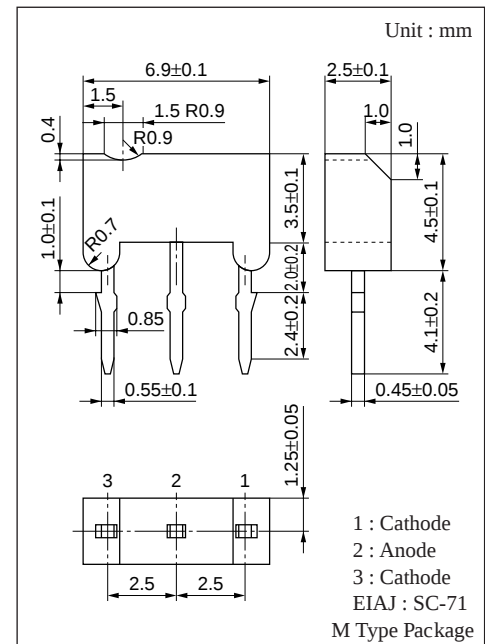
■ Features

- Short reverse recovery period t_{rr}
- Small capacity between pins, C_t


■ Absolute Maximum Ratings (Ta= 25°C)

Parameter	Symbol	Rating	Unit
Reverse voltage (DC)	V_R	80	V
Peak reverse voltage	V_{RM}	80	V
Forward current (DC)	Single	100	mA
	Double	150	
Peak forward current	Single	225	mA
	Double	340	
Non-repetitive peak forward surge current	Single	500	mA
	Double	750	
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	- 55 to +150	°C

* $t=1s$




■ Internal Connection




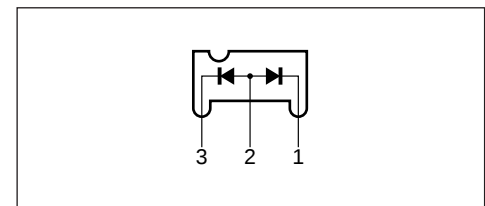


■ Electrical Characteristics (Ta= 25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Reverse current (DC)	I_R	$V_R=35V$			0.1	μA
Forward voltage (DC)	V_F	$I_F=100mA$			1.2	V
Reverse voltage (DC)	V_R	$I_R=100\mu A$	40			V
Terminal capacitance	C_t	$V_R=0V, f=1MHz$			4	pF
Reverse recovery time	t_{rr}^*	$I_F=10mA, V_R=6V$ $I_{rr}=0.1 \cdot I_R, R_L=100\Omega$			10	ns

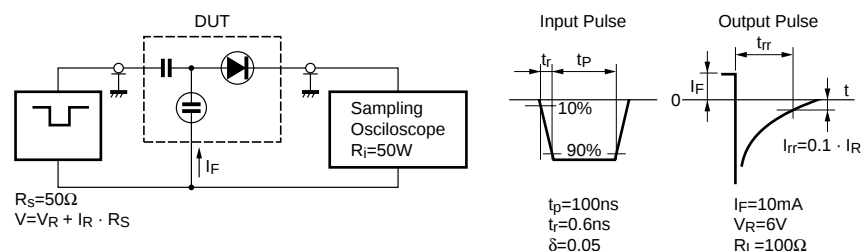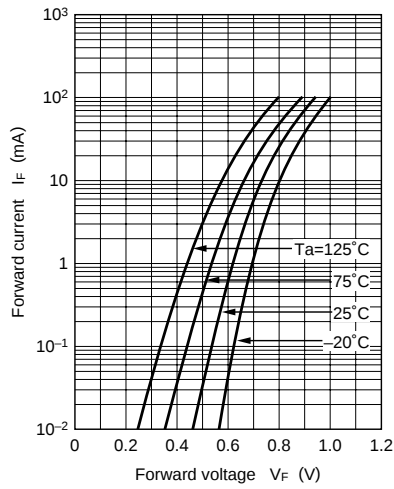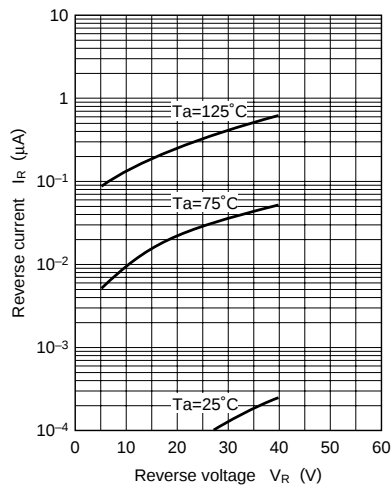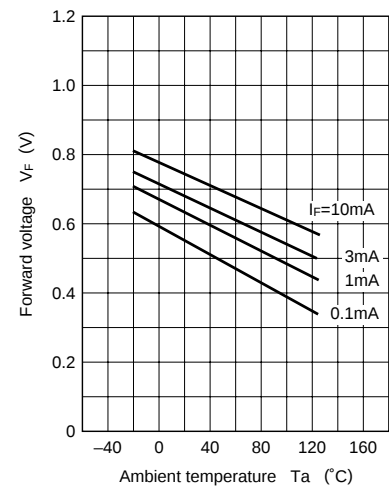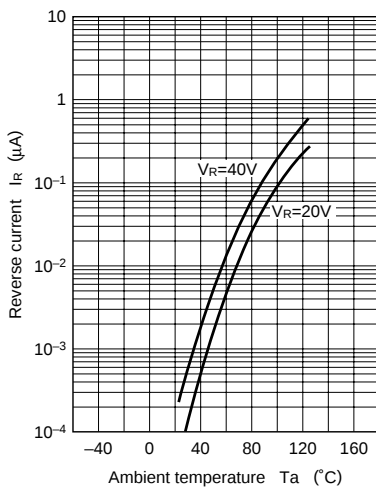* t_{rr} measuring circuit



$I_F - V_F$  $I_R - V_R$  $V_F - T_a$  $I_R - T_a$  $C_t - V_R$ 