

Kingtronics®

DB151S THRU DB157S

SINGLE-PHASE GLASS PASSIVATED SILICON BRIDGE RECTIFIER
REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 1.5 Ampere

FEATURES

- Glass passivated chip junction.
- High surge overload rating of 50 Amperes peak.
- Ideal for printed circuit board.
- High temperature soldering guaranteed: 260°C for 10 seconds.


MECHANICAL DATA

- Case: Molded plastic, DB-S.
- Epoxy: UL 94V-O rate flame retardant.
- Terminals: Leads solderable per MIL-STD-202, method 208 guaranteed.
- Mounting position: Any.
- Weight: 0.02ounce, 0.4gram.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified ,
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load derate current by 20%

Dimensions in inches and (millimeters)

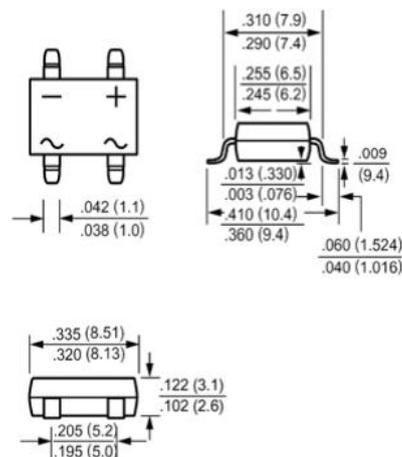

PARAMETER	SYMBOL	DB151S	DB152S	DB153S	DB154S	DB155S	DB156S	DB157S	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_A=40^\circ\text{C}$ (Note 2)	$I_{(AV)}$	1.5							A
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	50							A
Maximum forward Voltage at 1.5A DC and 25°C	V_F	1.1							V
Maximum DC Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking voltage $T_A=125^\circ\text{C}$	I_R	5.0 500							μA
Typical Junction Capacitance (Note 1)	C_J	25							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JC}$	40							$^\circ\text{C/W}$
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$	15							$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							$^\circ\text{C}$

1- Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 2- Units mounted on P.C.B. with 0.5 x 0.5" (13 x 13mm) copper pads.

Kingtronics® International Company

Website: www.kingtronics.com Email: info@kingtronics.com Tel: (852) 8106 7033 Fax: (852) 8106 7099

Kingtronics®

DB151S THRU DB157S

RATINGS AND CHARACTERISTIC CURVES

Fig. 1 - Derating Curve Output Rectified Current

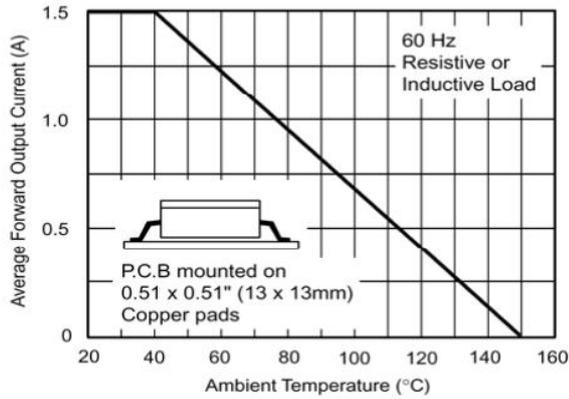


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Leg

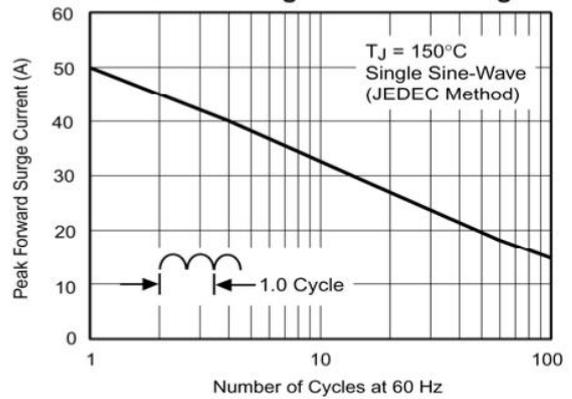


Fig. 3 - Typical Forward Characteristics Per Leg

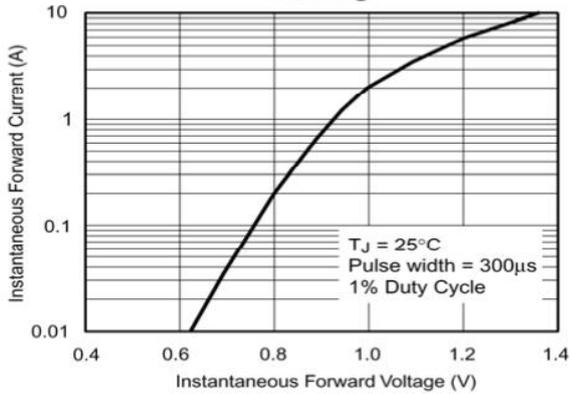


Fig. 4 - Typical Reverse Leakage Characteristics Per Leg

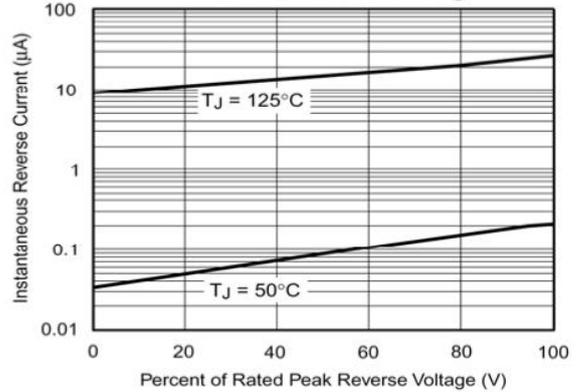


Fig. 5 - Typical Junction Capacitance Per Leg


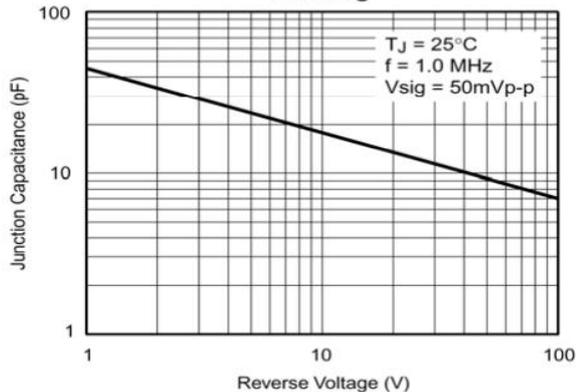


Fig. 6 - Typical Transient Thermal Impedance

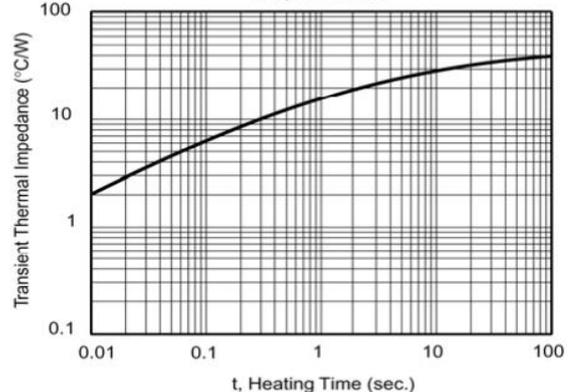

Note: Specifications are subject to change without notice.

Kingtronics® International Company