


0603 KSS Nylon Cable Gland (With Strain Relief)

- Strain relief design protect cable from breakage/right angle bending.
- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.

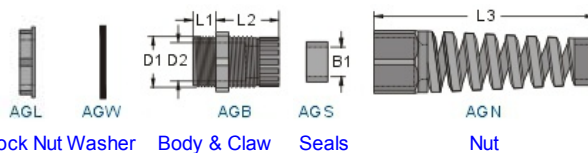

Metric Thread											Unit: mm
	Item No.	Thread	Mounting Hole	D1	D2	B1	L1	L2	L3	Cable Range	Packing
☐	AG-12SR	M12xP1.25	12.0~12.3	12.0	8.3	6.9	7.9	19.6	53.3	3 ~ 6.5	50 pcs / Bag
	AG-16SR	M16xP1.5	16.0~16.3	16.0	10.9	10.5	15.5	23.4	74.4	5 ~ 10	
	AG-20SR	M20xP1.5	20.0~20.3	20.0	15.0	14.0	15.0	28.5	96.2	10 ~ 14	
	AG-25SR	M25xP1.5	25.0~25.4	25.0	18.6	18.4	15.2	29.4	111.2	13 ~ 18	25 pcs / Bag

PG Thread (Without washer)											Unit: mm
	Item No.	Thread	Mounting Hole	D1	D2	B1	L1	L2	L3	Cable Range	Packing
☐	EG-7SR	PG7	12.5~12.8	12.5	8.3	6.9	7.9	20.0	53.3	3 ~ 6.5	50 pcs / Bag
☐	EG-9SR	PG9	15.2~15.5	15.2	10.5	8.0	7.9	22.0	62.5	4 ~ 8	
	EG-11SR	PG11	18.3~18.9	18.3	13.2	10.5	7.9	23.7	74.9	5 ~ 10	
	EG-13.5SR	PG13.5	20.4~20.7	20.4	15.5	12.0	8.9	24.6	85.5	6 ~ 12	
	EG-16SR	PG16	22.5~22.8	22.5	17.2	14.0	9.8	26.2	96.2	10 ~ 14	25 pcs / Bag
	EG-21SR	PG21	28.3~28.7	28.3	22.4	18.4	10.8	30.0	111.2	13 ~ 18	

PF Thread											Unit: mm
	Item No.	Thread	Mounting Hole	D1	D2	B1	L1	L2	L3	Cable Range	Packing
☐	AGJ-14SR	PF 1/4	14.0~14.3	14.0	8.2	6.5	8.0	19.6	53.3	3 ~ 6.5	50 pcs / Bag
☐	AGJ-17SR	PF 3/8	17.0~17.3	17.0	10.8	10.3	14.7	23.5	74.9	5 ~ 10	
☐	AGJ-21SR	PF 1/2	21.0~21.3	21.0	14.9	14.0	12.9	28.3	96.2	13 ~ 14	
☐	AGJ-27SR	PF 3/4	27.0~27.3	27.0	18.5	18.0	14.7	29.1	111.2	13 ~ 18	25 pcs / Bag

NPT Thread (Without washer and Lock Nut)											Unit: mm
	Item No.	Thread	Mounting Hole	D1	D2	B1	L1	L2	L3	Cable Range	Packing
☐	NPT-14SR	1/4"-18NPT	13.2~13.5	13.2	8.2	6.9	7.8	19.7	53.3	3 ~ 6.5	50 pcs / Bag
☐	NPT-38SR	3/8"-18NPT	16.7~17.0	16.7	10.8	10.5	14.6	23.8	74.9	5 ~ 10	
☐	NPT-12SR	1/2"-14NPT	21.2~21.5	21.2	14.9	14.0	12.9	28.4	96.2	10 ~ 14	
☐	NPT-34SR	3/4"-14NPT	26.3~26.6	26.3	18.5	18.4	14.5	29.2	111.2	13 ~ 18	25 pcs / Bag

[Input Sample Order](#)[Check Selected](#)[Return All Selected](#)

