

DALI CON 1-10 SO

DALI CON 1...10 SO | Signal converters DALI to 1...10 V



Product family features

- Load capacity of the signal output: max. 100 mA
- 0...10 V max. 5 mA active
- Switchable characteristic: linear/logarithmic
- Load capacity of switching contact: 5 A
- Touch DIM control of 1...10 V ECGs

Product family benefits

- Can be used purely as a switching actuator


Product datasheet

Technical data

Electrical data

Nominal voltage	220...240 V
Mains frequency	50...60 Hz
System wattage	5.00 W

Dimensions & weight

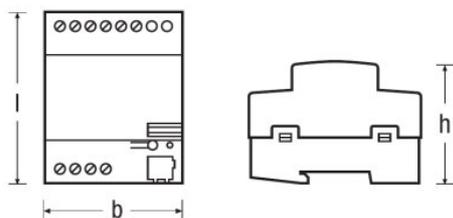

Length	72.0 mm
Width	64.0 mm
Height	90.0 mm
Product weight	200.00 g

Temperatures & operating conditions

Ambient temperature range	0...+45 °C
---------------------------	------------

Capabilities

Dimmable	No
Dimming interface	DALI / 1...10 V
Number of control outputs	1
Type of installation	DIN rail mounting
Load contact	5 A

Certificates & standards

Type of protection	IP20
Protection class	II

Logistical data

Commodity code	853710989900
----------------	--------------

Product datasheet

Equipment / Accessories

- Suitable for up to 100 electronic control gears
 - Suitable for up to 33 signal amplifiers DIM SA
-

Download Data

File	
	Declarations of conformity 334837_Declaration of conformity – Converters DALI to 1...10 V

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300639802	DALI CON 1-10 SO	Shipping carton box 16	370 mm x 200 mm x 240 mm	17.76 dm ³	4048.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.
