

## Surface Mount Type

# POSCAP



Series : **TQC**

Size : **B**

### Features

- High voltage (35 V.DC max.)
- RoHS compliance, Halogen free

### Specifications

Size code	B2	
Category temperature range	-55 °C to +105 °C	
Rated voltage range	16 V.DC to 35 V.DC	
Category voltage range	16 V.DC to 35 V.DC	
Rated capacitance range	3.9 μF to 33 μF	
Capacitance tolerance	±20 % (120 Hz / + 20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor (tan δ)	Please see the attached characteristics list	
Surge voltage (V.DC)	Rated voltage × 1.15	
Endurance	+105 °C, 2000 h (16TQC33MYFB : 1000 h), rated voltage applied	
	Capacitance change	Within ±20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	Within the initial limit
Damp heat (Steady State)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage	
	Capacitance change	Within +40 %, -20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	≤ 3 times of the initial limit

### Marking

R. Voltage (V.DC)	16	20	25	35			
Code	C	D	E	V			
R. Cap. (μF)	3.9	5.6	8.2	10	15	22	33
Code	Q6	U6	Y6	A7	E7	J7	N7

### Dimensions (not to scale)

Unit : mm

Size code	L±0.2	W±0.2	H±0.1	S±0.2	W1±0.1
B2	3.5	2.8	1.9	0.8	2.2

\* Externals of figure are the reference.

### Characteristics list

Series	Rated voltage (V.DC)	Rated temp. (°C)	Category voltage (V.DC)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life	
						L	W	H		Ripple* <sup>1</sup> current (mA r.m.s.)	ESR* <sup>2</sup> (mΩ max.)	tan δ* <sup>3</sup>	LC* <sup>4</sup> (μA)	Part number	Min. Packaging Qty (pcs)	Reflow Temp ≤260°C	Reflow Temp ≤250°C
TQC	16	105	16.0	105	10	3.5	2.8	1.9	B2	800	100	0.10	48.0	16TQC10M	2000	-	3
					15	3.5	2.8	1.9		1000	90	0.10	72.0	16TQC15M	2000		
					22	3.5	2.8	1.9		1000	90	0.10	35.2	16TQC22MYFB	2000		
					33	3.5	2.8	1.9		1000	90	0.10	158.4	16TQC33MYFB	2000		
	20	105	20.0	105	8.2	3.5	2.8	1.9		800	100	0.10	49.2	20TQC8R2M	2000		
					22	3.5	2.8	1.9		1100	90	0.10	132.0	20TQC22MYFB	2000		
					5.6	3.5	2.8	1.9		800	100	0.10	42.0	25TQC5R6M	2000		
										15	3.5	2.8	1.9	900	100		
	35	105	35.0	105	3.9	3.5	2.8	1.9		500	400	0.10	40.9	35TQC3R9MYF	2000		

\*1 Ripple current (100 kHz/ +105 °C), \*2 ESR (100 kHz/+20 °C) \*3 tan δ (120 Hz/+20 °C) \*4 After 5 minutes

◆ Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

## Surface Mount Type

# POSCAP



Series : **TQC**

Size : **D**


### Features

- High voltage (35 V.DC max.)
- RoHS compliance, Halogen free


### Specifications

Size code	D12	D15	D2	D3L
Category temperature range	-55 °C to +105 °C			
Rated voltage range	16 V.DC	16 V.DC to 25 V.DC	16 V.DC to 35 V.DC	16 V.DC to 25 V.DC
Category voltage range	16 V.DC	16 V.DC to 25 V.DC	16 V.DC to 35 V.DC	16 V.DC to 25 V.DC
Rated capacitance range	33 µF	22 µF to 47 µF	10 µF to 100 µF	68 µF to 150 µF
Capacitance tolerance	±20 % (120 Hz / +20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor (tan δ)	Please see the attached characteristics list			
Surge voltage (V.DC)	Rated voltage × 1.15			
Endurance	+105 °C, 2000 h, rated voltage applied			
	Capacitance change	Within ±20 % of the initial value		
	tan δ	≤ 1.5 times of the initial limit		
	DC leakage current	Within the initial limit		
Damp heat (Steady State)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage			
	Capacitance change	Within +40 %, -20 % of the initial value		
	tan δ	≤ 1.5 times of the initial limit		
	DC leakage current	≤ 3 times of the initial limit		

### Marking

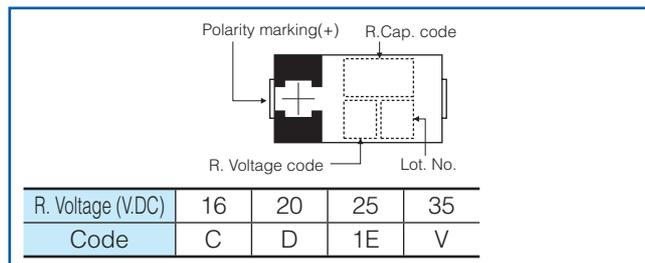

### Dimensions (not to scale)

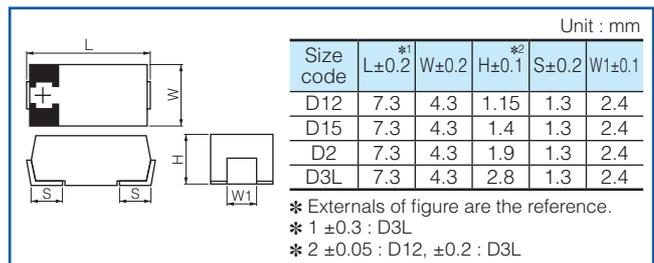

### Characteristics list

Series	Rated voltage (V.DC)	Rated temp. (°C)	Category voltage (V.DC)	Category temp. (°C)	Rated capacitance (µF)	Case size (mm)			Size code	Specifications				Standard		Floor life										
						L	W	H		Ripple current*1 (mA r.m.s.)	ESR*2 (mΩ max.)	tan δ*3	LC*4 (µA)	Part number	Min. Packaging Qty (pcs)	Reflow Temp ≤260°C	Reflow Temp ≤250°C									
TQC	16	105	16.0	105	33	7.3	4.3	1.15	D12	1800	40	0.10	52.8	16TQC33MYFS	4500	-	3									
										1400	70	0.10	52.8	16TQC33MYFD	3000											
						47	7.3	4.3	1.4	D15	1500	55	0.10	75.2	16TQC47MYFT			3000								
											1800	40	0.10	75.2	16TQC47MW			3000								
							D2	7.3	4.3	1.9	1450	55	0.10	75.2	16TQC47MYFD			3000								
											1500	50	0.10	108.8	16TQC68MYF			3000								
					D3L			7.3	4.3	2.8	1800	50	0.10	160.0	16TQC100MYF			3000								
											1800	50	0.10	240.0	16TQC150MYF			2500								
					20	105	20.0	105	150	7.3	4.3	1.9	D2	1500	70			0.15	240.0	1CTQC15173F1	3000					
														1400	60			0.10	66.0	20TQC33MYFD	3000					
														1450	55			0.10	94.0	20TQC47MYF	3000					
														D15	7.3			4.3	1.4	1500	55	0.10	94.0	20TQC47MYFT	3000	
	1250	100	0.15	200.0																20TQC100MD2	3000					
	D3L	7.3	4.3	2.8										1700	55			0.10	200.0	20TQC100MYF	2500					
										1500	45	0.10	38.0	25TQC15MV	3000											
	25	105	25.0	105						15	7.3	4.3	1.9	D2	1000			90	0.10	38.0	25TQC15MYFD	3000				
															1500			45	0.10	55.0	25TQC22MV	3000				
															D15			7.3	4.3	1.4	1400	60	0.10	55.0	25TQC22MYFD	3000
																					1400	70	0.10	55.0	25TQC22MYFT	3000
															D2			7.3	4.3	1.9	1400	60	0.10	82.5	25TQC33MYF	3000
					1400	70	0.10	170.0	25TQC68MYF												2500					
					35	105	35.0	105	10		7.3	4.3	1.9	D2	1000			120	0.10	35.0	35TQC10M	3000				
															1000			120	0.10	35.0	35TQC10MYF	3000				
															900			150	0.10	52.5	35TQC15MYF	3000				

\*1 Ripple current (100 kHz/ +105 °C), \*2 ESR (100 kHz/+20 °C) \*3 tan δ (120 Hz/+20 °C) \*4 After 5 minutes

◆ Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

## Guidelines and precautions regarding the technical information and use of our products described in this online catalog.

- If you want to use our products described in this online catalog for applications requiring special qualities or reliability, or for applications where the failure or malfunction of the products may directly jeopardize human life or potentially cause personal injury (e.g. aircraft and aerospace equipment, traffic and transportation equipment, combustion equipment, medical equipment, accident prevention, anti-crime equipment, and/or safety equipment), it is necessary to verify whether the specifications of our products fit to such applications. Please ensure that you will ask and check with our inquiry desk as to whether the specifications of our products fit to such applications use before you use our products.
- The quality and performance of our products as described in this online catalog only apply to our products when used in isolation. Therefore, please ensure you evaluate and verify our products under the specific circumstances in which our products are assembled in your own products and in which our products will actually be used.
- If you use our products in equipment that requires a high degree of reliability, regardless of the application, it is recommended that you set up protection circuits and redundancy circuits in order to ensure safety of your equipment.
- The products and product specifications described in this online catalog are subject to change for improvement without prior notice. Therefore, please be sure to request and confirm the latest product specifications which explain the specifications of our products in detail, before you finalize the design of your applications, purchase, or use our products.
- The technical information in this online catalog provides examples of our products' typical operations and application circuits. We do not guarantee the non-infringement of third party's intellectual property rights and we do not grant any license, right, or interest in our intellectual property.
- If any of our products, product specifications and/or technical information in this online catalog is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially with regard to security and export control, shall be observed.

## <Regarding the Certificate of Compliance with the EU RoHS Directive/REACH Regulations>

- The switchover date for compliance with the RoHS Directive/REACH Regulations varies depending on the part number or series of our products.
- When you use the inventory of our products for which it is unclear whether those products are compliant with the RoHS Directive/REACH Regulation, please select "Sales Inquiry" in the website inquiry form and contact us.

**We do not take any responsibility for the use of our products outside the scope of the specifications, descriptions, guidelines and precautions described in this online catalog.**

---

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[25TQC5R6M](#) [25TQC22MYFD](#) [20TQC47MYF](#) [20TQC22MYFB](#) [16TQC10M](#) [16TQC33MYFD](#) [25TQC15MV](#)  
[16TQC150MYF](#) [25TQC22MV](#) [20TQC47MYFT](#) [25TQC15MYFB](#) [16TQC33MYFS](#) [16TQC47MYFT](#) [20TQC33MYFD](#)  
[20TQC8R2M](#) [16TQC47MYFD](#) [20TQC100MYF](#) [25TQC33MYF](#) [35TQC3R9MYF](#) [16TQC15M](#) [16TQC47MW](#)  
[25TQC15MYFD](#) [25TQC22MYFT](#) [16TQC68MYF](#) [20TQC22MYFD](#) [35TQC10M](#) [35TQC2R7MYF](#) [35TQC10MYF](#)  
[35TQC15MYF](#) [25TQC68MYF](#) [1CTQC15173F1](#) [16TQC33MYFB](#) [20TQC100MD2](#) [16TQC22MYFB](#)